


Professional Lighting price list


Effective Sept' 13



Office



Retail



Outdoor




Industry



Hospitality

PHILIPS

IT'S NOT JUST ABOUT LIGHTING UP
A NATIONAL MONUMENT. IT'S ABOUT
LIGHTING UP AN ENTIRE NATION.

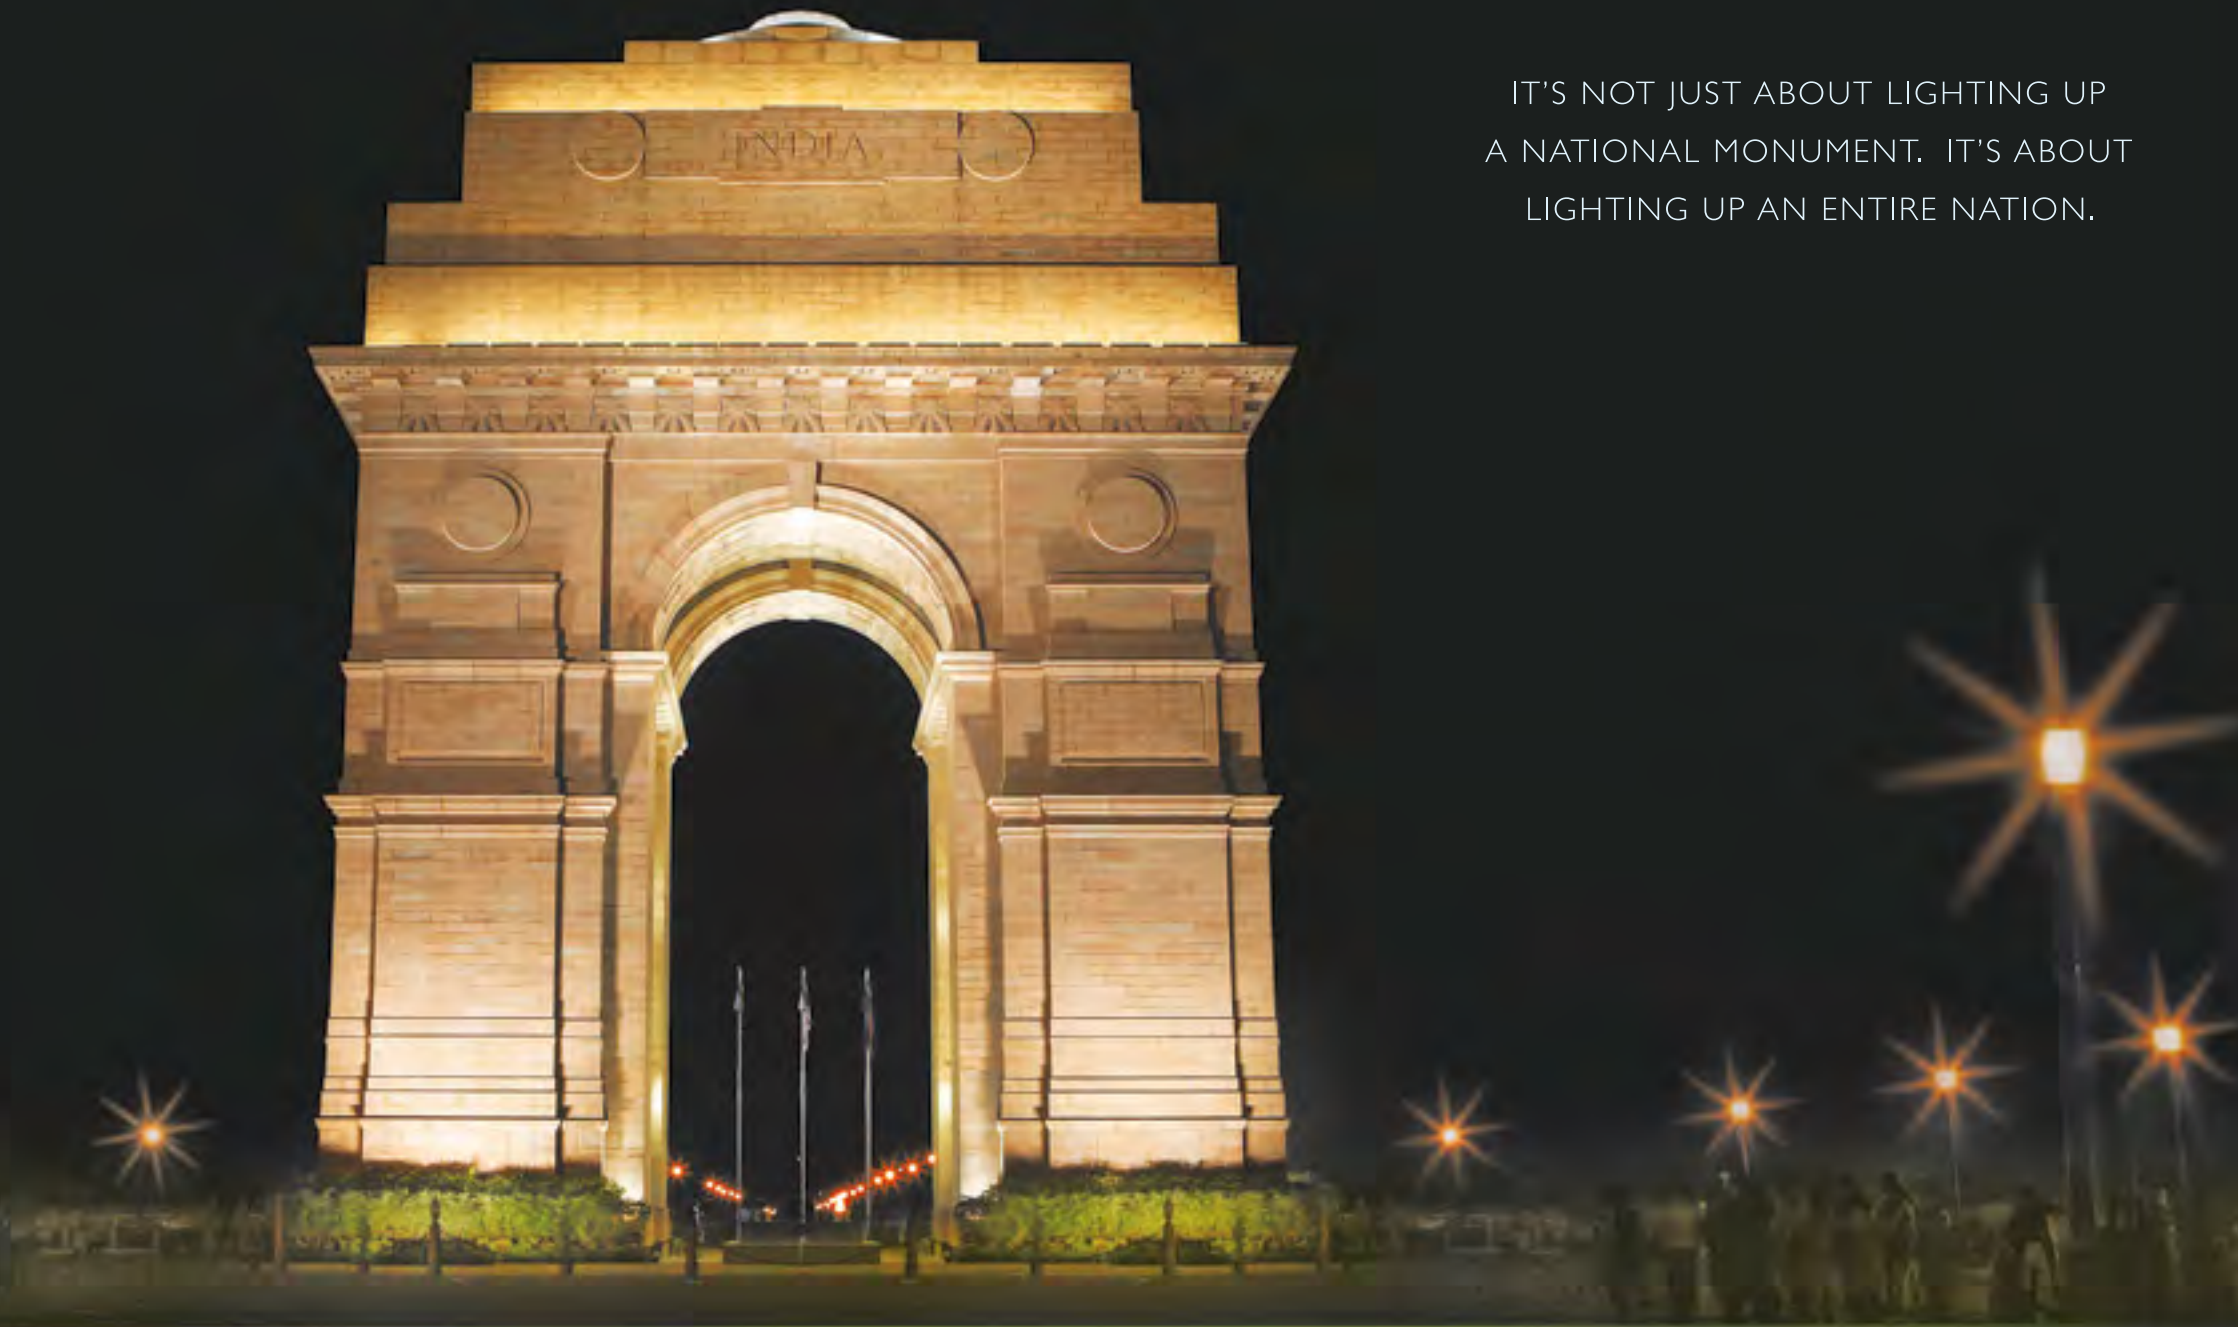

Philips Lighting, leading the LED Lighting transformation

Market Share Leadership of the Year in the Indian LED Lighting Market – 2013

Frost & Sullivan presents the 2013 Market Share Leadership of the Year Award in the LED Lighting Market to Philips Electronics India Limited for demonstrating excellence by capturing the highest market share within the Indian LED Lighting Market by achieving highest sales revenues amongst all competitors.

PHILIPS

Philips was leading revenue generation in the LED Lighting market with their 2012 sales exceeding 2011 by 83 percent as the company continued its dominant position of the past few years despite the market's exponential growth. With solutions across segments like indoor, outdoor, automotive, railways, and street lighting, the company has strengthened its leadership position by introducing a cost reduction program for LED lamps. For a towering 17 percent market share in the LED lighting market in 2012, Philips Electronics India Ltd. is the winner of the Frost & Sullivan Market Share Leadership award in the Indian LED Lighting market.


Learn more about Philips at
<http://www.lighting.philips.co.in/index.wpd>

FROST & SULLIVAN

2013 BEST
PRACTICES
AWARD

Market Share Leadership of the Year
in the LED Lighting Market

Learn more about Frost & Sullivan
at www.awards.frost.com

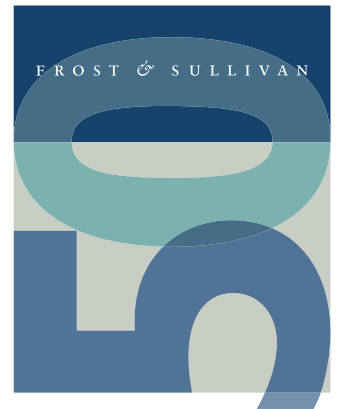

Sustainability and LED solutions

Sustainability and respect for the environment are core values of Philips. With LED products and solutions, we are driving the shift towards the use of LED lighting products and solutions. Today, we are the largest seller of energy efficient lighting products including LEDs globally.



Index

Luminaires

Indoor Commercial

| | |
|--|-------|
| Surface Mounted and Suspended Luminaires | 16-23 |
| Recess Mounted Luminaires | 24-35 |
| Downlighters | 36-46 |
| Projectors | 47-48 |
| Accent Lighting | 49-50 |
| Decobay and Pendants | 51 |
| Case Studies | 52-63 |

Indoor Industrial

| | |
|----------------------------------|-------|
| Battens and Special Luminaires | 66-69 |
| HighBay Luminaires | 70-72 |
| HighBay and Bulkhead Luminaires | 73 |
| Wellglass Luminaires | 74 |
| Under Canopy & LowBay Luminaires | 75 |
| Case Studies | 76-79 |

Outdoor Luminaires

| | |
|--------------------------------|---------|
| Street Lighting Luminaires | 82-89 |
| City Beautification Luminaires | 90-99 |
| Flood Lighting Luminaires | 100-103 |
| Control Gear Boxes | 104-105 |
| Case Studies | 108-113 |

Lamps

HID Lamps

| | |
|--------------|---------|
| Outdoor | 118-119 |
| Industry | 120-121 |
| Retail | 122-113 |
| Case Studies | 124-127 |

LED Lamps

| | |
|--------------|---------|
| | 130-133 |
| Case Studies | 134-139 |

CFL Ni Lamps

142-145

Tubular Lamps

| | |
|--------------|---------|
| | 148-151 |
| Case Studies | 152-153 |

CFLi Lamps

156-161

Lighting Electronics

Ballast for High Intensity Discharge Lamps

| | |
|----------------------------------|---------|
| Electronic Ballast for HID lamps | 166-168 |
| Electronic Ignitors | 169 |

Ballast for lamps and compact fluorescent lamps

| | |
|------------------------------|---------|
| Electronic Ballast | 172-173 |
| Electromagnetic Control gear | 174 |
| Dimming Ballast | 174-175 |
| Consumer Ballast | 175 |

Halogen transformer

| | |
|---|---------|
| Transformer for Low Voltage Halogen Lamps | 178-179 |
|---|---------|

Mainstream Battens

182-185

Modular Switches

188-197

Stand-alone Controls

201

Meaningful innovations



For over a century, Philips Lighting has kept pace with the changing demands of consumers and lifestyles, be it developing cutting edge technologies, innovating new concepts, developing new products or improving existing products.

Throughout the years, we have focused on innovations that are meaningful and relevant for meeting your need.

Luminaires

Indoor Commercial

| | |
|--|-------|
| Surface Mounted and Suspended Luminaires | 16-23 |
| Recess Mounted Luminaires | 24-35 |
| Downlighters | 36-46 |
| Projectors | 47-48 |
| Accent Lighting | 49-50 |
| Decobay and Pendants | 51 |
| Case Studies | 52-63 |

Indoor Industrial

| | |
|----------------------------------|-------|
| Battens and Special Luminaires | 66-69 |
| Highbay Luminaires | 70-72 |
| Highbay and Bulkhead Luminaires | 73 |
| Wellglass Luminaires | 74 |
| Under Canopy & Lowbay Luminaires | 75 |
| Case Studies | 76-79 |

Outdoor Luminaires

| | |
|--------------------------------|---------|
| Street Lighting Luminaires | 82-89 |
| City Beautification Luminaires | 90-99 |
| Flood Lighting Luminaires | 100-103 |
| Control Gear Boxes | 104-105 |
| Case Studies | 108-113 |

Indoor Commercial



Indoor Commercial

Surface Mounted and Suspended Luminaires



Stratus

| Type | LP (Rs.) |
|-----------------------------|----------|
| SP790P LED44S-5000 PSE-ODSI | 18000 |
| SP790P LED44S-4000 PSE-ODSI | 18000 |

Stratus is a sleek, suspended up-down LED lighting luminaire which seamlessly blends with office interiors.



Sereno

| Type | LP (Rs.) |
|--|----------|
| RC869B LED 30S-6500 PSE W30LI 20 D8 GR | 12000 |

High efficiency surface and suspended mounted LED luminaire. The luminaire has a high transmittivity opal diffuser for diffused lighting. Available in color temperature of 4000k & 5000k.



DayWave - BPS 800

| Type | LP (Rs.) |
|---------------------------------|------------|
| BPS800 3000 H-DN BLL AC-MLO BRU | on request |
| BPS800 3000 H-UP BLL AC-MLO BRU | on request |

Daywave is modular luminaire and is available in option of curved-up and curved-down shapes. Standby blue up-lighting option.



LED Trunking

| Type | LP (Rs.) |
|-------------------------------|----------|
| LL199X 1xDLED40-5000 PSE ODWH | 7000 |
| LL199X 1xDLED40-4000 PSE ODWH | 7000 |
| LL199X 1xDLED40-6500 PSE ODWH | 7000 |
| ZTX199 BC LED | 500 |
| TTX199/03 LED | 3500 |
| TTX199/01 LED | 1250 |
| ZTX200 SMS | 330 |
| ZTX200 EP | 70 |

The product offers upto 45% energy saving. Long service life solutions for hypermarkets / warehouses / distribution center.



Cirrus Surface mounted

| Type | LP (Rs.) |
|------------------------------|----------|
| SM365C LED-34-5000 PSE-OD GR | 12000 |

Energy efficient surface mounted LED luminaire suitable for 2x2 grid ceiling. The luminaire comes in two colours Grey (GR) and White (WH) in combination with profiled and flat diffuser.

Indoor Commercial

Surface Mounted and Suspended Luminaires



Astra

| Type | LP (Rs.) |
|------------------------------|----------|
| BN150W LED13S-6500 PSE OD GR | 3000 |
| BN150W LED20S-6500 PSE OD GR | 5700 |

Surface & wall mounted LED batten with extruded aluminum housing and robust construction.



Sereno - TPS 814

| Type | For lamp | LP (Rs.) |
|-------------------------|-----------|----------|
| TPS814 4xTL5-14W EBP D8 | 4xTL5-14W | 8650 |
| TPS814 2xTL5-28W EBP D8 | 2xTL5-28W | 7000 |
| TPS814 2xTL5-54W EBP D8 | 2xTL5-54W | 7300 |

High efficiency surface mounted lighting solution suitable for T5 lamps with new generation high gloss D8 micro optics with omnidirectional luminance control and extremely low depth of 50mm. The luminaire is suitable for surface mounting in modular ceiling. Luminaire suitable for 4xTL5 14W & 2xTL5 28W / 54W.



Sereno - TPH 824

| Type | For lamp | LP (Rs.) |
|-----------------------------|-----------|----------|
| TPH824 2xTL5-28W EBP D/I D8 | 2xTL5-28W | 7500 |
| TPH824 2xTL5-14W EBP D/I D8 | 2xTL5-14W | 4800 |
| TPH824 2xTL5-54W EBP D/I D8 | 2xTL5-54W | 7600 |

Suspended and wall mounted up-down lighting luminaire with new generation D8 micro optics with omnidirectional luminance control. The luminaire can be suspended or mounted on wall with the help of mounting accessories which need to be ordered separately. Suspended version can also be mounted in continuous line arrangement offering continuous up-down lighting. Suitable for high efficiency T5 lamps.



Sereno - TPH 824

| Type | For lamp | LP (Rs.) |
|-------------------------|-----------|----------|
| TPH824 2xTL5-14W HF OD | 2xTL5-14W | 5000 |
| TPH824 2xTL5-28W EBP OD | 2xTL5-28W | 7600 |
| TPH824 2xTL5-54W EBP OD | 2xTL5-54W | 7700 |

Suspended and wall mounted up-down lighting luminaire with high transmittivity non-yellowing diffuser. The luminaire can be suspended or mounted on wall with the help of mounting accessories which need to be ordered separately. Suspended version can also be mounted in continuous line arrangement offering continuous up-down lighting. Suitable for high efficiency T5 lamps.

Indoor Commercial

Surface Mounted and Suspended Luminaires



Sereno -
TPH 824

| Type | For lamp | LP (Rs.) |
|--------------------------|-----------|----------|
| TPH824 2xTL5-14W HF IND | 2xTL5-14W | 5000 |
| TPH824 2xTL5-28W EBP IND | 2xTL5-28W | 7600 |
| TPH824 2xTL5-54W EBP IND | 2xTL5-54W | 7700 |

Suspended and wall mounted indirect lighting solution with uplighting. The luminaire can be suspended or mounted on wall with the help of mounting accessories which need to be ordered separately. Suspended version can also be mounted in continuous line arrangement offering continuous up-down lighting. Suitable for high efficiency T5 solution.

ZPH 524

| Type | For lamp | LP (Rs.) |
|---------------|-----------|----------|
| ZPH524 NI1000 | accessory | 1500 |
| ZPH524 NI1500 | accessory | 2000 |

Suspension mounting kit suitable for use with TPH 824 series of sereno products. Available in 1 meter and 1.5 meter version.

ZPH 525

| Type | For lamp | LP (Rs.) |
|------------|-----------|----------|
| ZPH 525 CP | accessory | 300 |

Coupling kit suitable for TPH 824 series of products for continuous line mounting along with ZPH524.



TCS 605 -
Flatlite

| Type | For lamp | LP (Rs.) |
|------------------------|-----------|----------|
| TCS605 2xTL-D36W EBT | 2xTL-D36W | 3750 |
| TCS605 2xTL-D36W IC M1 | 2xTL-D36W | 3250 |
| TCS605 1xTL-D36W IC M1 | 1xTL-D36W | 2900 |
| TCS605 1xTL-D36W EBE | 1xTL-D36W | 2900 |

Indoor decorative surface mounted luminaire complete with all accessories. Suitable for 1xTL-D36W and 2xTL-D36W lamps.

Indoor Commercial

Surface Mounted and Suspended Luminaires



X-tend -
TCS 398

| Type | For lamp | LP (Rs.) |
|-----------------------------|-----------|----------|
| TCS398 M 2xTL-D36W IC M6 | 2xTL-D36W | 5400 |
| TCS398 M 2xTL-D36W IC D6 | 2xTL-D36W | 5400 |
| TCS398 M 2xTL-D36W IC M2 | 2xTL-D36W | 4850 |
| TCS398 M 2xTL-D36W IC M-DGN | 2xTL-D36W | 4950 |
| TCS398 2xTL-D36W M6 EBT | 2xTL-D36W | 6100 |
| TCS398 2xTL-D36W D6 EBT | 2xTL-D36W | 5350 |
| TCS398 2xTL-D36W M2 EBT | 2xTL-D36W | 6100 |
| TCS398 2xTL-D36W M-DGN EBT | 2xTL-D36W | 5350 |

X-tend range of surface mounted luminaire with option of high efficiency 3D lamella OLC optics suitable for TL-D lamps. Mirror options : M2 (matt mirror; ribbed cross louver), D6 (high gloss high quality aluminium optics with 3D lamellae), M6 (matt high quality aluminium optics with 3D lamellae), M_DGN (mirror with decorative green louvers). Option of luminaires suitable for T5 lamps version also available.



X-tend -
Compact
TCS 399

| Type | For lamp | LP (Rs.) |
|---------------------------|-----------|----------|
| TCS399 M 2xTL-D36W EBT M2 | 2xTL-D36W | 4400 |
| TCS399 2xTL-D36W M6 EBT | 2xTL-D36W | 5250 |
| TCS399 2xTL-D36W D6 EBT | 2xTL-D36W | 5250 |

Compact X-tend range of surface mounted luminaire with option of high efficiency 3D lamella OLC optics suitable for TL-D lamps. Mirror options : M2 (matt mirror; ribbed cross louver), D6 (high gloss high quality aluminium optics with 3D lamellae), M6 (matt high quality aluminium optics with 3D lamellae), M_DGN (mirror with decorative green louvers). Option of luminaires suitable for T5 lamps version also available.

Indoor Commercial

Surface Mounted and Suspended Luminaires



Line Light

| Type | For lamp | LP (Rs.) |
|---------------------------|------------|----------|
| TPX310 1x28/54W TL5 O-SAT | 1x28/54W T | 4500 |
| TPX311 1x28W TL5 EB O-SAT | 1x28W TL5 | 5750 |
| TPX312 1x28/54W TL5 O-SAT | 1x28/54W T | 8190 |
| TPX320 1x28/54W TL5 MI | 1x28/54W T | 4100 |
| TPX321 1x28W TL5 EB MI | 1x28W TL5 | 5200 |
| TPX321 1x28W TL5 EBP MI | 1x28W TL5 | 5200 |
| TPX620 2x28/54W TL5 MI | 2x28/54W T | 5200 |
| TPX621 2x54W TL5 EBP MI | 2x54W TL5 | 6700 |

Linelight - Surface/Suspended Version

Surface mounting / suspended continuous and stand alone linear lighting systems with single as well as twin lamps per luminaire unit in different wattages. Available in both M1 mirror version as well as with diffuser (O-SAT).

TPX310/320 – continuous version with diffuser and mirror optics respectively.

TPX311/321 – 4ft version with diffuser and mirror optics respectively

TPX312/322 – 8ft version with diffuser and mirror optics respectively.



Line Light

| Type | For lamp | LP (Rs.) |
|----------------------------|--------------|----------|
| TBX310 1x28/54W TL5 O-SAT | 1x28/54W T | 4600 |
| TBX311 1x54W TL5 EBP O-SAT | 1x54W TL5 | 5800 |
| TBX311 1x28W TL5 EB O-SAT | 1x28W TL5 | 5800 |
| TBX311 1x28W TL5 EBP O-SAT | 1x28W TL5 | 5800 |
| TBX312 1x28/54W TL5 O-SAT | 1x28/54W T | 8200 |
| TBX320 1x28/54W TL5 MI | 1x28/54W T | 4000 |
| TBX321 1x28W TL5 EB MI | 1x28W TL5 | 5200 |
| TBX321 1x28W TL5 EBP M | 1x28W TL5 | 5200 |
| TBX322 1x28/54W TL5 MI | 1x28/54W TL5 | 7200 |
| TBX611 2x28W TL5 EB O-SAT | 2x28W TL5 | 9100 |
| TBX620 2x28/54W TL5 MI | 2x28/54W TL5 | 5300 |

Linelight - Recessed Version

Recess mounting continuous and stand alone linear lighting systems with single as well as twin lamps per luminaire unit in different wattages. Available in both M1 mirror version as well as with diffuser (O-SAT).

TBX310/320 – continuous version with diffuser and mirror optics respectively.

TBX311/321 – 4ft version with diffuser and mirror optics respectively.

TBX312/322 – 8ft version with diffuser and mirror optics respectively.

Suitable for ceiling with access from backside.

Indoor Commercial

Surface Mounted and Suspended Luminaires



Line Light

| Type | For lamp | LP (Rs.) |
|----------------------------|-----------|----------|
| GGX310 1x28W TL5 EB O-SAT | 1x28W TL5 | 1800 |
| GGX310 1x54W TL5 EBP O-SAT | 1x54W TL5 | 1850 |
| GGX310 1x28W TL5 EBP O-SAT | 1x28W TL5 | 1800 |
| GGX320 1x28W TL5 EB MI | 1x28W TL5 | 1800 |
| GGX320 1x28W TL5 EBP MI | 1x28W TL5 | 1850 |
| GGX320 1x54W TL5 EBP MI | 1x54W TL5 | 1850 |
| GGX620 2x28W TL5 EBP MI | 2x28W TL5 | 2350 |

GGX RANGE : Gear trays for single as well as twin lamps per tray with provision of lamp overlap.

GGX310/320 – Single lamp gear trays.

GGX610/620 – Twin lamp gear trays.



Line Light

| Type | LP (Rs.) |
|-----------|----------|
| ZTX310 EP | 160 |
| ZTX320 EP | 160 |
| ZTX610 EP | 190 |
| ZTX620 EP | 190 |

ZTX RANGE : End plates for Linelight units.



X-tend -
TPS 498

| Type | For lamp | LP (Rs.) |
|------------------------------|-----------|----------|
| TPS498 M 2xTL-D36W IC D/I D6 | 2xTL-D36W | 5900 |
| TPS498 2xTL-D36W D6 EBT | 2xTL-D36W | 6150 |

Suspended mounted luminaire with up-down lighting distribution with 3D lamella and OLC anti-glare optics. Luminaire is suspended with the help of ZPH 300 US mounting kit which is to be ordered separately. Suitable for TLD and T5 luminaires.

Indoor Commercial

Surface Mounted and Suspended Luminaires

22



TCS 306

| Type | For lamp | LP (Rs.) |
|-----------------------------|-----------|----------|
| TCS306 2xTL-D36W IC | 2xTL-D36W | 3150 |
| TCS306 1xTL-D36W IC | 1xTL-D36W | 2675 |
| TCS306 2xTL-D36W EBE | 2xTL-D36W | 3250 |
| TCS306 1xTL-D36W EBE | 1xTL-D36W | 2750 |
| TCS306 2xTL-D36W HF EBT 236 | 2xTL-D36W | 3800 |

Indoor decorative luminaire suitable for surface as well as recessed mounting. Suitable for 1xTL-D36W and 2xTL-D36W.



TCS 150

| Type | For lamp | LP (Rs.) |
|-------------------------|-----------|----------|
| TCS150 2xTL5-54W M1 EBP | 2xTL5-54W | 3250 |
| TCS150 1xTL5-54W M1 EBP | 1xTL5-54W | 3100 |
| TCS150 2xTL5-28W M1 EBT | 2xTL5-28W | 3150 |
| TCS150 1xTL5-28W M1 EBT | 1xTL5-28W | 2900 |

Surface and Suspended Mounted mirror optic luminaire for general lighting. Luminaire is also available in single and twin lamp version for TL5 28W and TL5 54W lamps.



Maxlite -
TCS 350 /
FCS 350

| Type | For lamp | LP (Rs.) |
|----------------------------|-----------|----------|
| TCS350 2xTL-D36W IC M1 | 2xTL-D36W | 2850 |
| TCS350 2xTL-D36W IC C5 | 2xTL-D36W | 3000 |
| TCS350 2xTL-D18W IC M1 | 2xTL-D18W | 2000 |
| TCS350 2xTL-D36W C5 EBT | 2xTL-D36W | 3500 |
| TCS350 2xTL-D36W M1 HF EBT | 2xTL-D36W | 3300 |
| TCS350 2xTL-D36W EBE M1 | 2xTL-D36W | 2800 |
| TCS350 2xTL-D36W EBE C5 | 2xTL-D36W | 2850 |
| TCS350 2xTL5-28W EBE M1 | 2xTL5-28W | 3000 |
| TCS350 2xTL5-28W EBE C5 | 2xTL5-28W | 3200 |
| TCS350 2xTL5-28W EB C5 | 2xTL5-28W | 3700 |
| TCS350 1xTL5-28W C5 EB | 1xTL5-28W | 2800 |
| TCS350 P 1xTL-D36W HFB M1 | 1xTL-D36W | 2700 |
| TCS350 1xTL5-28W HFE M1 | 1xTL5-28W | 2750 |
| TCS350 2xTL5-14W HF-E | 2xTL5-14W | 2300 |
| FCS350 2xPL-L18W IC M1 | 2xPL-L18W | 1750 |

Indoor Commercial

Surface Mounted and Suspended Luminaires

23

| Type | For lamp | LP (Rs.) |
|----------------------------|-----------|----------|
| FCS350 2xPL-L36W M1 HF EBT | 2xPL-L36W | 2500 |

Surface mounted mirror optic luminaire suitable for linear fluorescent lamps TL-D 36W, TL5-28W and PL-L with option of standard (M1) and low glare darklite (C5) optics.



Opalite -
TCS 019

| Type | For lamp | LP (Rs.) |
|-----------------------|-----------|----------|
| TCS019 2xTL-D36W IC O | 2xTL-D36W | 2590 |
| TCS019 1xTL-D36W IC O | 1xTL-D36W | 1750 |
| TCS019 2xTL-D18W IC O | 2xTL-D18W | 1850 |
| TCS019 2xTL-D36W EBT | 2xTL-D36W | 2900 |
| TCS019 1xTL-D36W EBT | 1xTL-D36W | 1950 |

Indoor decorative luminaire with opal acrylic cover suitable for surface and suspension mounting.



Wing-
CDX Linea

| Type | For lamp | LP (Rs.) |
|-------------------------------|-----------|----------|
| FBS590 2xPL-L36W EBT OD DF-WH | 2xPL-L36W | 6500 |

Linea range of suspended luminaire suitable for 2xPL-36W wall lamp with central opal diffuser and decorative end caps. Suspension system ZPS300 has to be ordered separately.



Lotus -
FCS 518

| Type | For lamp | LP (Rs.) |
|-----------------------------|---------------|----------|
| FCS518 2xPL-S/2P1 IW 240V | 2xPL-S/2P1 IW | 1540 |
| FCS518 2xPL-S/2P9W 240V | 2xPL-S/2P9W | 1360 |
| FCS518 2xPL-L18W 240V | 2xPL-L18W | 1750 |

Surface mounted luminaire with mirror optics housing aesthetically designed using 3D profile high grade engineering plastic. The decorative slits spill a little light adding to ambience.



FCS 031

| Type | For lamp | LP (Rs.) |
|-----------------------------|---------------|----------|
| FCS031 2xPL-S/2P1 IW 240V | 2xPL-S/2P1 IW | 1700 |

Surface mounted luminaire suitable for 2xPL-s | IW with CRCA housing and decorative endcaps.

Indoor Commercial

Recessed Mounted Luminaires



| Type | LP (Rs.) |
|---------------------------------|----------|
| RC600B LED40S/840 PSU W60L60 | 37500 |
| RC600B LED3 IS/840 PSU W60L60 | 37000 |
| RC600B LED40S/840 PSD W60L60 | 38000 |
| RC600B LED3 IS/840 PSD W60L60 | 37000 |
| RC600B LED40S/840 PSU W30LI 20 | 37500 |
| RC600B LED3 IS/840 PSU W30LI 20 | 37500 |
| RC600B LED40S/840 PSD W30LI 20 | 38000 |
| RC600B LED3 IS/840 PSD W30LI 20 | 37000 |

Recessed Mounted LED luminaire with innovative design for modern work spaces with best in class luminaire efficacy of > 80 lm /w at luminaire level. Versions of luminaire are available in DALI Dimmable (PSD) driver and Integral Actilume Controller (ACL). Also available in 4x1 version.



| Type | LP (Rs.) |
|------------------------------|----------|
| RC380B LED-25-6500 PSE OD WH | 9500 |
| RC380B LED-30-6500 PSE OD WH | 11500 |
| RC380B LED-25-4000 PSE OD WH | 9500 |
| RC380B LED-30-4000 PSE OD WH | 11500 |

FullGlow is a beautifully designed luminaire which is bound to delight the occupants with refreshing and comfortable experience through its pure form and glare-free light.



| Type | LP (Rs.) |
|---------------------------|----------|
| RC140B LED29S-6500 PSE WH | 7500 |

The perfect office light is advanced, energy efficient and compliments interiors. GreenSquare will also be available in 4000K color temperature on request.

Indoor Commercial

Recessed Mounted Luminaires



| Type | LP (Rs.) |
|-----------------------------|----------|
| RC365B LED33-5000 PSU OD GR | 11100 |
| RC365B LED33-5000 PSU OD WH | 11100 |
| RC366B LED33-5000 PSU OD GR | 10700 |
| RC366B LED33-5000 PSU OD WH | 10700 |

Energy efficient recessed mounted LED luminaire suitable for 2x2 grid ceiling. The luminaire is offers of two colours Grey (GR) and White (WH) in combination with profiled and flat diffuser. RC365 B - profiled diffuser, RC366B : Flat diffuser. Lumen output of 3300 lumens. Available in 4000k & 5000k color temperatures. Constant current electronic driver.



| Type | LP (Rs.) |
|-----------------------------|----------|
| RC365B LED22-5000 PSU OD GR | 11100 |
| RC365B LED22-5000 PSU OD WH | 11100 |

Energy efficient recessed mounted LED luminaire suitable for 2x2 grid ceiling. The luminaire offers of two colours Grey (GR) and White (WH) in combination with profiled and flat diffuser. RC365 B - profiled diffuser; RC366B : Flat diffuser. Lumen output of 2200 Lumens. Available in 4000k & 5000k color temperatures. Constant current electronic driver.



| Type | LP (Rs.) |
|---------------------------------------|------------|
| BBS560 LED3500-/NW-4000 PSD AC-MLO-CW | on request |

Recessed mounted LED luminaire with innovative design. High efficiency MLO optics.



| Type | LP (Rs.) |
|---------------------------------|----------|
| RC600B LED40S/840 PSU W30LI 20 | 37500 |
| RC600B LED3 IS/840 PSU W30LI 20 | 37500 |
| RC600B LED40S/840 PSD W30LI 20 | 37500 |
| RC600B LED3 IS/840 PSD W30LI 20 | 37500 |

Recessed mounted LED luminaire with innovative design for modern work spaces with best in class luminaire efficacy of > 80 lm /w at luminaire level. Versions of luminaire are available in DALI Dimmable (PSD) driver and Integral Actilume Controller (ACL).

Indoor Commercial

Recessed Mounted Luminaires



Sereno -
TBS 869

| Type | For lamp | LP (Rs.) |
|-------------------------|-----------|----------|
| TBS869 2xTL5-28W EBP D8 | 2xTL5-28W | 6300 |
| TBS869 2xTL5-54W EBP D8 | 2xTL5-54W | 6400 |

High efficiency Sereno recessed luminaire range suitable for recessed mounting in modular ceiling module and extremely low height of 50 mm. This family is suitable for energy efficient T5 lamps.



X-tend -
TBS 669

| Type | For lamp | LP (Rs.) |
|--------------------------|-----------|----------|
| TBS669 M 2xTL5-54 EBP M2 | 2xTL5-54 | 4850 |
| TBS669 M 2xTL5-54 EBP D6 | 2xTL5-54 | 5800 |
| TBS669 M 2xTL5-28W EB D6 | 2xTL5-28W | 5700 |
| TBS669 M 2xTL5-28W EB M2 | 2xTL5-28W | 5100 |

Recess mounting (CAT-2) luminaire with 3D lamellae & OLC optics designed for metric false ceiling type Armstrong / US Gypsum or similar ceiling mounting system with concealed or exposed 'T' sections. X-tend TS version is suitable for high efficiency T5 lamps. Mirror option M2,D6,MDGN.



X-tend -
TBS 369

| Type | For lamp | LP (Rs.) |
|--------------------------|-------------|----------|
| TBS369 M 2xTL-D36W IC M2 | 2xTL-D36W | 4200 |
| TBS369 M 2xTL-D36W IC M6 | M 2xTL-D36W | 5100 |
| TBS369 M 2xTL-D36W IC D6 | 2xTL-D36W | 5100 |
| TBS369 2xTL-D36W D6 EBT | 2xTL-D36W | 5600 |
| TBS369 2xTL-D36W M2 EBT | 2xTL-D36W | 5000 |
| TBS369 2xTL-D36W M6 EBT | 2xTL-D36W | 5600 |

X-tend Recessed mounted luminaires with high efficiency 3D lamella & OLC optic and suitable for TLD lamps. Available in variety of efficient (D6 & M6) and aesthetical optics (M2 and M-DGN) suitable for metric false ceiling type Armstrong / US Gypsum or similar ceiling mounting system with concealed or exposed 'T' section.

Indoor Commercial

Recessed Mounted Luminaires



TBS 518

| Type | For lamp | LP (Rs.) |
|------------------------|-----------|----------|
| TBS518 2xTL-D36W IC MI | 2xTL-D36W | 3050 |
| TBS518 2xTL-D36W EBE | 2xTL-D36W | 3100 |
| TBS518 2xTL-D36W EBT | 2xTL-D36W | 3350 |

Indoor decorative mirror optic luminaire complete with all accessories.



TBS 520

| Type | For lamp | LP (Rs.) |
|-------------------------|-----------|----------|
| TBS520 2xTL-D36W MI EBE | 2xTL-D36W | 2675 |
| TBS520 2xTL5-28W MI EBE | 2xTL5-28W | 2775 |

Indoor Decorative recessed mirror optics luminaire complete with all accessories, suitable for chain/ conduit mounting, suitable for TL-D36W and TL5-28W lamps.



LINELUX

| Type | LP (Rs.) |
|-------------------------|----------|
| RC720B 2xTL-528W EBT D8 | 5200 |
| RC720B 2xTL-554W EBT D8 | 5400 |
| RC720B 2xTL-528W EBT D6 | 5000 |
| RC720B 1xTL-528W EBT D6 | 4700 |
| RC720B 2xTL-554W EBP D6 | 5300 |
| RC720B 1xTL-554W EBP D6 | 5100 |

LineLUX recessed mounted luminaire with variety of of efficient and aesthetical optics suitable for armstrong techzone ceilings. LineLux uses energy efficient T5 lamps and is available in two mirror options : D6 (high gloss aluminium optics with 3D lamella) & D8 (Semi high Gloss OLC micro optics).



LINELUX
RC720B

| Type | LP (Rs.) |
|-------------------------|----------|
| RC720B 2xTL-528W EBT OD | 5200 |
| RC720B 2xTL-554W EBT OD | 5400 |
| RC720B 2xTL-528W EBT OD | 5000 |
| RC720B 1xTL-528W EBT OD | 4700 |
| RC720B 2xTL-554W EBP OD | 5300 |
| RC720B 1xTL-554W EBP OD | 5100 |

LineLUX recessed mounted luminaire with high transitivity diffused optics suitable for armstrong techzone ceilings. LineLux uses energy efficient T5 in 28w and 54w configuration.

Indoor Commercial

Recessed Mounted Luminaires

28



FBS 200

| Type | For lamp | LP (Rs.) |
|-------------------------|-----------|----------|
| FBS200 2 PL-L36W EBT M1 | 2xPL-L36W | 2500 |
| FBS200 2 PL-L36W IC M1 | 2xPL-L36W | 2400 |
| FBS200 2 PL-L36W EBT P5 | 2xPL-L36W | 2600 |
| FBS200 2 PL-L36W IC P5 | 2xPL-L36W | 2450 |

Recessed luminaire in compact size (1ftx2 ft approx) suitable for 2x36 PL-L lamps and with high frequency electronic gear.



X-tend - TBS 369

| Type | For lamp | LP (Rs.) |
|---------------------------|-----------|----------|
| TBS369 M 4xTL-D18W IC M2 | 4xTL-D18W | 4400 |
| TBS369 M 4xTL-D18W IC M6 | 4xTL-D18W | 5300 |
| TBS369 M 4xTL-D18W IC D6 | 4xTL-D18W | 5300 |
| TBS369 M 4xTL-D18W EBS D6 | 4xTL-D18W | 5800 |
| TBS369 M 4xTL-D18W EBS M2 | 4xTL-D18W | 5000 |
| TBS369 M 4xTL-D18W EBS M6 | 4xTL-D18W | 5800 |

X-tend recessed mounted luminaires with high efficiency 3D lamella & OLC optic and suitable for TLD lamps. Available in variety of efficient (D6 & M6) and aesthetical optics (M2 and M-DGN) suitable for metric false ceiling type Armstrong / US Gypsum or similar ceiling mounting system with concealed or exposed 'T' section.



Sereno - TBS 869

| Type | For lamp | LP (Rs.) |
|-------------------------|-----------|----------|
| TBS869 4xTL5-14W EBP D8 | 4xTL5-14W | 6600 |

High efficiency Sereno recessed luminaire range suitable for recessed mounting in modular ceiling with 600 x 600 module and extremely low height of 50 mm. This family is suitable for energy efficient T5 lamps.



Mystique

| Type | Product Description | LP (Rs.) |
|--------------|----------------------|----------|
| 919015810444 | RC795B 3xTL-514W EBP | 7400 |
| 919015810580 | RC795B 4xTL-514W EBP | 7500 |

Mystique is an Innovative luminaire that reflects the transition of lighting trend toward aesthetic design and architectural integration. Suitable for 1x3 and 1x4 TL5 lamps.

Indoor Commercial

Recessed Mounted Luminaires


29



X-tend - TBS 669

| Type | For lamp | LP (Rs.) |
|---------------------------|-----------|----------|
| TBS669 M 4xTL5-14W EBP D6 | 4xTL5-14W | 5700 |
| TBS669 M 3xTL5-14W EBP D6 | 3xTL5-14W | 5400 |

Recess mounting (CAT-2) luminaire with 3D lamellae & OLC optics designed for metric false ceiling type Armstrong / US Gypsum or similar ceiling mounting system with concealed or exposed 'T' sections. X-tend TS version is suitable for high efficiency T5 lamps. Mirror option M2,D6,MDGN.



Aura - TBS 088

| Type | For lamp | LP (Rs.) |
|---------------------------|-----------|----------|
| TBS088 4xTL-D18W EBS C5 | 4xTL-D18W | 4850 |
| TBS088 4xTL-D18W EBS M2 | 4xTL-D18W | 4250 |
| TBS088 M 4xTL-D18W IC M2 | 4xTL-D18W | 3350 |
| TBS088 M 4xTL-D18W IC C5 | 4xTL-D18W | 3950 |
| TBS088 M 2xTL-D36W IC M2 | 2xTL-D36W | 3400 |
| TBS088 M 2xTL-D36W IC C5 | 2xTL-D36W | 3950 |
| TBS088 2xTL-D36W EBE M2 | 2xTL-D36W | 3300 |
| TBS088 2xTL-D36W EBE C5 | 2xTL-D36W | 3950 |
| TBS088 2xTL-D36W C5 EBT | 2xTL-D36W | 4650 |
| TBS088 2xTL-D36W M2 EBT | 2xTL-D36W | 4050 |
| TBS088 2xTL5-28W EBP M2 | 2xTL5-28W | 4050 |
| TBS088 M 2xTL5-28W EBP C5 | 2xTL5-28W | 4650 |
| TBS088 4xTL5-14W EBP M2 | 4xTL5-14W | 4550 |
| TBS088 4xTL5-14W EBP C5 | 4xTL5-14W | 5050 |

Recess mounting luminaire with mirror optics designed for metric false ceiling type Armstrong / US Gypsum or similar ceiling mounting system with concealed or exposed 'T' sections. Available in standard (M1) and low glare darklite (C5) optics.




Wing-C^{DX} Quadra

| Type | For lamp | LP (Rs.) |
|-------------------------------|-----------|----------|
| TBS570 4xTL5-14W EBP D6 DF-WH | 4xTL5-14W | 6500 |
| FBS570 2xPL-L36W IC D6 DF-WH | 2xPL-L36W | 5400 |
| FBS570 2xPL-L36W EBT D6 DF-WH | 2xPL-L36W | 6200 |

Wing C^{DX} Quadra (with Central Mirror)
Recess mounted direct-indirect lighting luminaire with special seamlessly integrated frame and centrally mounted high efficiency - low glare 3D OLC optics.

Indoor Commercial

Recessed Mounted Luminaires



Wing-C^{DX}
Quadra

| Type | For lamp | LP (Rs.) |
|---|-----------|----------|
| TBS570 4xTL5-14W HF ODF-WH | 4xTL5-14W | 6000 |
| Wing C ^{DX} Quadra (Closed) Recess mounted direct-indirect lighting luminaire with special seamlessly integrated frame and full opal acrylic diffuser (OAD). | | |



Wing-C^{DX}
Quadra

| Type | For lamp | LP (Rs.) |
|--|-----------|----------|
| TBS570 4xTL5-14W EBP OD DF-WH | 4xTL5-14W | 6500 |
| FBS570 2xPL-L36W IC OD DF-WH | 2xPL-L36W | 5700 |
| FBS570 2xPL-L36W EBT OD DF-WH | 2xPL-L36W | 6200 |
| Wing C ^{DX} Quadra (with UFD) Recess mounted direct-indirect lighting luminaire with special seamlessly integrated frame and centrally mounted diffused lighting UFD optics. | | |



Wing-C^{DX}
Quadra

| Type | For lamp | LP (Rs.) |
|---|-----------|----------|
| TBS571 4xTL5-14W EBP D6 DF-WH | 4xTL5-14W | 6500 |
| FBS571 2xPL-L36W IC D6 DF-WH | 2xPL-L36W | 5700 |
| FBS571 2xPL-L36W EBT D6 DF-WH | 2xPL-L36W | 6200 |
| Wing C ^{DX} Quadra (with side Mirrors) Recess mounted direct-indirect lighting luminaire with special seamlessly integrated frame and side mounted high efficiency - low glare 3D OLC optics. | | |



Wing-C^{DX}
Linea

| Type | For lamp | LP (Rs.) |
|--|-----------|----------|
| FBS580 2xPL-L36W IC D6 DF-WH | 2xPL-L36W | 5600 |
| FBS580 2xPL-L36W EBT D6 DF-WH | 2xPL-L36W | 6000 |
| Wing C ^{DX} Linea (Recess with Mirrors) Recess mounted direct-indirect lighting luminaire with central assembly having special end caps and high efficiency - low glare 3D OLC optics. | | |

Indoor Commercial

Recessed Mounted Luminaires



Wing-C^{DX}
Linea

| Type | For lamp | LP (Rs.) |
|---|-----------|----------|
| FBS580 2xPL-L36W IC OD DF-WH | 2xPL-L36W | 5600 |
| FBS580 2xPL-L36W EBT OD DF-WH | 2xPL-L36W | 6000 |
| Wing C ^{DX} Linea (Recess with UFD) Recess mounted direct-indirect lighting luminaire with central assembly having special end caps and diffused lighting UFD optics. | | |



Wing-C^{DX}
Linea

| Type | For lamp | LP (Rs.) |
|--|-----------|----------|
| FBS580 2xPL-L36W IC D6 DF-WH | 2xPL-L36W | 5600 |
| FBS580 2xPL-L36W EBT D6 DF-WH | 2xPL-L36W | 6000 |
| Wing C ^{DX} Linea (Semi - recessed with Mirrors) Semi - recessed direct-indirect lighting luminaire with central assembly having special end caps and high efficiency - low glare 3D OLC optics. | | |



Wing-C^{DX}
Linea

| Type | For lamp | LP (Rs.) |
|---|-----------|----------|
| FBS581 2xPL-L36W IC OD DF-WH | 2xPL-L36W | 5600 |
| FBS581 2xPL-L36W EBT OD DF-WH | 2xPL-L36W | 6000 |
| Wing C ^{DX} Linea (Semi - recessed with UFD) Semi - recessed direct-indirect lighting luminaire with central assembly having special end caps and diffused lighting UFD optics. | | |



Wing-C

| Type | For lamp | LP (Rs.) |
|--|---------------|----------|
| FBS470 2xPL-L36W EBT D6 DF-WH | 2xPL-L36W EBT | 6100 |
| FBS470 2xPL-L36W EBT D6 DF-GN | 2xPL-L36W EBT | 6100 |
| FBS470 2xPL-L36W EBT M6 DF-GN | 2xPL-L36W EB | 6100 |
| FBS470 2xPL-L36W EBT M6 DF-WH | 2xPL-L36W EB | 6100 |
| FBS470 2xPL-L36W EBT D6 DF-OR | 2xPL-L36W EBT | 6100 |
| FBS470 2xPL-L36W EBT M6 DF-OR | 2xPL-L36W EBT | 6100 |
| Recessed mounted direct - indirect high performance decorative luminaire with coloured wings, designed for metric false ceiling type Armstrong / US Gypsum or similar ceiling mounting system with concealed or exposed 'T' sections. Colour: Pearl White, Aqua Green, Fiery Amber, optics high gloss, high quality aluminium(D6). | | |

Indoor Commercial

Recessed Mounted Luminaires



Wing-C LX

| Type | For lamp | LP (Rs.) |
|-------------------------------|-----------|----------|
| FBS450 2xPL-L36W IC M2 DF-WH | 2xPL-L36W | 4100 |
| FBS450 2xPL-L36W M2 IC DF-OR | 2xPL-L36W | 4100 |
| FBS450 2xPL-L36W M2 IC DF-GN | 2xPL-L36W | 4100 |
| FBS450 2xPL-L36W IC D6 DF-WH | 2xPL-L36W | 4600 |
| FBS450 2xPL-L36W IC D6 DF-OR | 2xPL-L36W | 4600 |
| FBS450 2xPL-L36W IC D6 DF-GN | 2xPL-L36W | 4600 |
| FBS450 2xPL-L36W IC P5 DF-WH | 2xPL-L36W | 4300 |
| FBS450 2xPL-L36W IC P5 DF-OR | 2xPL-L36W | 4300 |
| FBS450 2xPL-L36W IC P5 DF-GN | 2xPL-L36W | 4300 |
| FBS450 2xPL-L36W EBT M2 DF-GN | 2xPL-L36W | 4450 |
| FBS450 2xPL-L36W EBT M2 DF-OR | 2xPL-L36W | 4450 |
| FBS450 2xPL-L36W EBT M2 DF-WH | 2xPL-L36W | 4450 |
| FBS450 2xPL-L36W EBT D6 DF-OR | 2xPL-L36W | 5000 |
| FBS450 2xPL-L36W EBT D6 DF-WH | 2xPL-L36W | 5000 |
| FBS450 2xPL-L36W EBT D6 DF-GN | 2xPL-L36W | 5000 |
| FBS450 2xPL-L36W EBT P5 DF-WH | 2xPL-L36W | 4650 |
| FBS450 2xPL-L36W EBT P5 DF-OR | 2xPL-L36W | 4650 |
| FBS450 2xPL-L36W EBT P5 DF-GN | 2xPL-L36W | 4650 |

Recess mounted decorative direct - indirect lighting luminaire suitable for compact fluorescent lamp PL-L36W, option of anti glare D6 optics and choice of Wing colors (DF-OR- Fiery Amber; DF-GN - Aqua Green, DF-WH - Pearl White). Option of optics P5- Parallite, M2- Matt Mirror ribbed cross louver.



VOICE RC789B

| Type | LP (Rs.) |
|-------------------------|----------|
| RC789B 2xTL5-14W EBT MO | 16500 |
| RC789B 3xTL5-14W EBP MO | 17050 |
| RC789B 2XTL5-24W EBP MO | 17050 |
| RC789B 3XTL5-24W EBP MO | 17600 |

Innovative high efficiency low glare diffused lighting solutions using patented Philips Ledalite MESO optics. Luminaire suitable for TL5 14W and TL5 24W lamp.

Indoor Commercial


Recessed Mounted Luminaires



PIQUE RC790B

| Type | LP (Rs.) |
|-------------------------|----------|
| RC790B 2xTL5-14W EBT MO | 17600 |
| RC790B 3xTL5-14W EBP MO | 18150 |
| RC790B 2XTL5-24W EBP MO | 18150 |
| RC790B 3XTL5-24W EBP MO | 17000 |

Innovative high efficiency low glare diffused lighting solutions using patented Philips Ledalite MESO optics. Luminaire suitable for TL5 14W and TL5 24W lamp.



Purefx RC791B

| Type | LP (Rs.) |
|-------------------------|----------|
| RC791B 2xTL5-14W EBT MO | 18700 |
| RC791B 3xTL5-14W EBP MO | 19250 |
| RC791B 2XTL5-24W EBP MO | 19250 |
| RC791B 3XTL5-24W EBP MO | 19800 |

Innovative high efficiency low glare diffused lighting solutions using patented Philips Ledalite MESO optics. Luminaire suitable for TL5 14W and TL5 24W lamp.



Vectra RC792B

| Type | LP (Rs.) |
|-------------------------|----------|
| RC792B 2xTL5-14W EBT MO | 17050 |
| RC792B 3xTL5-14W EBP MO | 17600 |
| RC792B 2XTL5-24W EBP MO | 17600 |
| RC792B 3XTL5-24W EBP MO | 18150 |

Innovative high efficiency low glare diffused lighting solutions using patented Philips Ledalite MESO optics. Luminaire suitable for TL5 14W and TL5 24W lamp.

Indoor Commercial

Recessed Mounted Luminaires



FBS 300 P5

| Type | For lamp | LP (Rs.) |
|---------------------------|-----------|----------|
| FBS300 M 3xPL-L36W IC P5 | 3xPL-L36W | 5000 |
| FBS300 M 2xPL-L36W IC P5 | 2xPL-L36W | 4700 |
| FBS 300 2xPL-L36W P5 EBT | 2xPL-L36W | 5200 |
| FBS300 M 3xPL-L36W EBP P5 | 3xPL-L36W | 6100 |
| FBS300 M 2xPL-L18W EBS P5 | 2xPL-L18W | 3200 |
| FBS300 M 2xPL-L18W IC P5 | 2xPL-L18W | 2450 |

Recess mounting low glare luminaire with P5 paralite louvre & decorative perforations for metric false ceiling type Armstrong / US Gypsum or similar ceiling mounting system with concealed or exposed 'T' sections.



FBS 440

| Type | For lamp | LP (Rs.) |
|-------------------------|-----------|----------|
| FBS440 2xPL-L36W OB EBT | 2xPL-L36W | 4200 |
| FBS440 2xPL-L36W SP EBT | 2xPL-L36W | 4200 |
| FBS440 2xPL-L36W RL EBT | 2xPL-L36W | 4200 |
| FBS440 2xPL-L36W OL EBT | 2xPL-L36W | 4200 |
| FBS440 2xPL-L36W OP EBT | 2xPL-L36W | 4200 |
| FBS440 2xPL-L36W OS EBT | 2xPL-L36W | 4200 |
| TBS440 4xTL5-14W OB EBP | 4xTL5-14W | 4400 |
| TBS440 4xTL5-14W OP EBP | 4xTL5-14W | 4400 |
| TBS440 4xTL5-14W SP EBP | 4xTL5-14W | 4400 |
| TBS440 4xTL5-14W OL EBP | 4xTL5-14W | 4400 |
| TBS440 3xTL5-14W OB EBP | 3xTL5-14W | 4400 |
| TBS440 2xTL5-14W OB EBP | 2xTL5-14W | 4400 |

Recessed mounted luminaire with diffused lighting provided by seven different type of attachments with different shape of perforations. Suitable for metric false ceiling Armstrong/ US Gypsum or similar ceiling with exposed or concealed 'T' section lamp options: 2xPLL-36W, 2xPLL-40W, 2xPLL-55W, 4x TL5-14W, 3xTL5-14W.

Indoor Commercial

Recessed Mounted Luminaires



FBS 430

| Type | For lamp | LP (Rs.) |
|-----------------------------|-----------|----------|
| FBS430 2xPL-L36W P5 EBT 236 | 2xPL-L36W | 4000 |
| FBS430 2xPL-L36W EBT 236 | 2xPL-L36W | 3900 |
| FBS430 M 2xPL-L36W IC P5 | 2xPL-L36W | 3400 |
| FBS430 M 2xPL-L36W IC | 2xPL-L36W | 3300 |


Recessed mounted direct - indirect softlite luminaire designed for metric false ceiling type Armstrong / US Gypsum or similar ceiling mounting system with concealed or exposed 'T' sections.



FBS 518

| Type | For lamp | LP (Rs.) |
|----------------------------|--------------|----------|
| FBS518 2xPL-S/2P11W I 240V | 2xPL-S/2P11W | 1400 |
| FBS518 2xPL-S/2P9W I 240V | 2xPL-S/2P9W | 1300 |

Rectangular Recessed mounted luminaire for 2xPL-S9W and 2xPL-S11W with white powder coated lamella.



FBS 285

| Type | For lamp | LP (Rs.) |
|----------------------------|--------------|----------|
| FBS285 2xPL-S/2P11W I 240V | 2xPL-S/2P11W | 1800 |
| FBS285 2xPL-L/2P18W I 240V | 2xPL-L/2P18W | 1900 |
| FBS285 2xPL-L18W HF | 2xPL-L18W | 2800 |

Recessed square luminaire suitable for 2xPL-S11W and 2xPL-LT8W with mirror.

Indoor Commercial

Downlighters



GreenSpot range

| Type | LP (Rs.) |
|-----------------------|----------|
| BBS311 1xDLED-5000 WH | 4200 |
| BBS312 1xDLED-5000 WH | 3900 |
| BBS313 1xDLED-5000 WH | 3900 |
| GGH122 WH | 1950 |
| GGH133 WH | 2650 |
| GGH144 WH | 3675 |

A range of recessed mounted LED down lights with the option for fixed/ adjustable and spot options.



GreenLED

| Type | MRP (Rs.) |
|----------------------------|-----------|
| BBS170 1xDLED -5000 PSU WH | 2690 |
| BBS170 1xDLED -4000 PSU WH | 2690 |

A low glare, high efficiency recessed mounted LED downlight.



GreenLED Square

| Type | LP (Rs.) |
|----------------------------|----------|
| BBS175 1xDLED -5000 PSU WH | 2690 |
| BBS175 1xDLED -4000 PSU WH | 2690 |

A low glare, high efficiency recessed mounted LED downlight.



GreenLED mini

| Type | LP (Rs.) |
|----------------------------|------------|
| BBS150 1xDLED PSU 4000- WH | on request |
| BBS150 1xDLED PSU 4000- WH | on request |

GreenLED Mini (Circular)- recessed mounted circular LED down light in 5000K and 4000K CCT .



GreenLED mini Square

| Type | LP (Rs.) |
|----------------------------|------------|
| BBS155 1xDLED PSU 4000- WH | on request |
| BBS155 1xDLED PSU 4000- WH | on request |

GreenLED Mini (Square)- recessed mounted circular LED down light in 5000K and 4000K CCT .

Indoor Commercial

Downlighters



GreenLEDi

| Type | MRP (Rs.) |
|---------------------------|-----------|
| DN191B LED6S-6500 PSU WH | 1650 |
| DN191B LED6S-4000 PSU WH | 1650 |
| DN191B LED6S-3000 PSU WH | 1650 |
| DN192B LED9S-6500 PSU WH | 1999 |
| DN192B LED9S-4000 PSU WH | 1999 |
| DN192B LED9S-3000 PSU WH | 1999 |
| DN193B LED12S-6500 PSU WH | 2300 |
| DN193B LED12S-4000 PSU WH | 2300 |
| DN193B LED12S-3000 PSU WH | 2300 |
| DN194B LED15S-6500 PSU WH | 3000 |
| DN194B LED15S-4000 PSU WH | 3000 |
| DN194B LED15S-3000 PSU WH | 3000 |

GreenLEDi range is a breakthrough offering which combines modern product design, the latest LED technology and reliable heat management to deliver a long lasting efficient solution for offices and retail spaces.



LuxSpace - Square

| Type | LP (Rs.) |
|---------------------------|----------|
| BBS482 DLED-3000 PSU-E WH | 31000 |
| BBS482 DLED-4000 PSU-E WH | 31000 |
| BBS482 DLED-3000 PSD-E WH | 33900 |
| BBS482 DLED-4000 PSD-E WH | 33900 |

High efficiency recessed mounted LED downlight . PSU : Non-Dimmable, PSD : DALI Dimmable. Option of 3000K version also available.

Indoor Commercial

Downlighters



| Type | LP (Rs.) |
|---------------------------|----------|
| DN180B 1xDLED-3000 PSU WH | 6900 |
| DN180B 1xDLED-4000 PSU WH | 6900 |
| DN180B 1xDLED-5000 PSU WH | 6900 |
| DN181B 1xDLED-3000 PSU WH | 8600 |
| DN181B 1xDLED-4000 PSU WH | 8600 |
| DN181B 1xDLED-5000 PSU WH | 8600 |
| DN182B 1xDLED-4000 PSU WH | 12700 |
| DN182B 1xDLED-5000 PSU WH | 12700 |
| DN182B 1xDLED-3000 PSU WH | 12700 |
| DN183B 1xDLED-3000 PSU WH | 14500 |
| DN183B 1xDLED-5000 PSU WH | 14500 |
| DN183B 1xDLED-4000 PSU WH | 14500 |

GreenSpace Gen2 is an optimized LED downlight. Featuring a simple yet robust integrated design and high system efficacy, it offers customers a sustainable solution with a return on investment within one to three years.



| Type | LP (Rs.) |
|-----------------------------|----------|
| BBS145 P 1xDLED-4000 PSE AC | 4500 |
| BBS145 P 1xDLED-6000 PSE AC | 4500 |
| BBS145 P 1xDLED-4000 PSE | 4500 |
| BBS145 P 1xDLED-6000 PSE | 4500 |

Recessed mounted LED down-along with decorative attachment from 145 family. (1100 lumen).



| Type | LP (Rs.) |
|---------------------------|----------|
| BBS182 1xDLED-4000 PSU WH | 15000 |
| BBS182 1xDLED-5000 PSU WH | 15000 |
| BBS181 1xDLED-4000 PSU WH | 7950 |
| BBS181 1xDLED-5000 PSU WH | 7950 |
| BBS180 1xDLED-4000 PSU WH | 6750 |
| BBS180 1xDLED-5000 PSU WH | 6750 |

GreenSpace is a recessed mounted LED downlight solution offering with a high system efficacy. Also available in 2000, 1000 and 600 lumens. Option of 3000K CCT also available on request.

Indoor Commercial

Downlighters



| Type | LP (Rs.) |
|-----------------------------------|----------|
| BBS488 C 1xDLED-4000 PSU-E CWH | 20900 |
| BBS488 C 1xDLED-4000 PSD-E CWH | 25850 |
| BBS488 C 1xDLED-4000 PSU-E CWH PG | 24200 |

High efficiency recessed mounted LED downlight. PSU: Non-Dimmable, PSD: DALI Dimmable. PG: IP 54 version. Option of 3000K CCT also available. UGR 19 compliant version also available.




| Type | LP (Rs.) |
|-----------------------------------|----------|
| BBS498 C 1xDLED-4000 PSU-E CWH | 31900 |
| BBS498 C 1xDLED-4000 PSD-E CWH | 39050 |
| BBS498 C 1xDLED-4000 PSU-E CWH PG | 31900 |

High efficiency recessed mounted LED downlight. PSU: Non-Dimmable, PSD: DALI Dimmable. PG: IP 54 version. Option of 3000K CCT also available. UGR 19 compliant version also available.



Indoor Commercial


Downlighters



FBH 145

| Type | For lamp | LP (Rs.) |
|----------------------------------|--------------|----------|
| FBH145 M 1xPL-C/2P18W 240V LH | 1xPL-C/2P18W | 1375 |
| FBH145 M 1xPL-C/2P13W 240V LH | 1xPL-C/2P13W | 1375 |
| FBH145 M 2xPL-C/2P13W 240V LH | 2xPL-C/2P13W | 1575 |
| FBH145 M 2xPL-C/2P18W 240V LH | 2xPL-C/2P18W | 1575 |
| FBH145 M 1xPL-C/4P13W HFM 40V LH | 1xPL-C/4P13W | 1650 |
| FBH145 M 2xPL-C/4P13W HFM 40V LH | 2xPL-C/4P13W | 2200 |
| FBH145 M 1xPL-C/4P18W HFM 40V LH | 1xPL-C/4P18W | 1650 |
| FBH145 M 2xPL-C/4P18W HF 240V LH | 2xPL-C/4P18W | 2200 |

Low-depth recessed low glare downlighter inclusive of enclosed control gear box and matt finish reflector. Option of ZZG attachments available.



FBH 145

| Type | For lamp | LP (Rs.) |
|--------------------------------|--------------|----------|
| FBH145 M 1xPL-C/2P13W 240V | 1xPL-C/2P13W | 1700 |
| FBH145 M 2xPL-C/2P13W 240V | 2xPL-C/2P13W | 1900 |
| FBH145 M 1xPL-C/2P18W 240V | 1xPL-C/2P18W | 1700 |
| FBH145 M 2xPL-C/2P18W 240V | 2xPL-C/2P18W | 1900 |
| FBH145 M 1xPL-C/4P18W HFM 240V | 1xPL-C/4P18W | 1950 |
| FBH145 M 1xPL-C/4P13W HFM 240V | 1xPL-C/4P13W | 1950 |
| FBH145 M 2xPL-C/4P13W HFM 240V | 2xPL-C/4P13W | 2480 |
| FBH145 M 2xPL-C/4P18W HFM 240V | 2xPL-C/4P18W | 2480 |
| FBH145 M 2xPL-C/2P26W 240V | 2xPL-C/2P26W | 2100 |

Low-depth recessed low glare downlighter inclusive of enclosed control gear box and matt finish reflector. Option of ZZG attachments available.



FBS 075

| Type | For lamp | LP (Rs.) |
|----------------------------|--------------|----------|
| FBS075 2xPL-C/2P18W 240V | 2xPL-C/2P18W | 1100 |
| FBS075 1xPL-C/2P18W 240V | 1xPL-C/2P18W | 900 |
| FBS075 2x18PL-C HFB | 2x18PL-C HFB | 1450 |

Open Circular recessed mounted downlighter suitable for PLC-18W lamp.

Indoor Commercial

Downlighters



FBS 085

| Type | For lamp | LP (Rs.) |
|----------------------------------|---------------|----------|
| FBS085 2xPL-C/2P18W 240V RG-FR | 2xPL-C/2P18W | 1300 |
| FBS085 1xPL-C/2P18W 240V RG FR | 1xPL-C/2P18W | 1100 |
| FBS085 2xPL-C/4P18W HFB RG-FR | 2xPL-C/4P18W | 1500 |
| FBS085 1xPL-C/4P18W HFA RG-FR | 1xPL-C/4P18W | 1250 |
| FBS085 2xPL-C/2P 18W 1SG-FR | 2xPL-C/2P 18W | 1275 |
| FBS085 1xPL-C/2P 18W 1SG-FR | 1xPL-C/2P 18W | 1075 |

Recess mounted closed down light luminaire with center frosted glass cover, suitable for horizontal lamp.



FBS 095

| Type | For lamp | LP (Rs.) |
|----------------------------|--------------|----------|
| FBS095 1xPL-C/2P18W 240V | 1xPL-C/2P18W | 1050 |
| FBS095 2xPL-C/2P18W 240V | 2xPL-C/2P18W | 1275 |
| FBS095 2xPL-C18W HF | 2xPL-C/4P18W | 1620 |
| FBS095 P 1xPL-C18W HF | 1xPL-C18W | 1225 |

Recessed downlighter with patterned specular reflector in compact size suitable for horizontal lamps.



Space -
FBH 225

| Type | For lamp | LP (Rs.) |
|------------------------------|--------------|----------|
| FBH225 2xPL-C/2P18W 240V | 2xPL-C/2P18W | 2100 |
| FBH225 1xPL-C/2P26W 240V | 1xPL-C/2P26W | 2000 |
| FBH225 2xPL-C/2P26W 240V | 2xPL-C/2P26W | 2400 |
| FBH225 2xPL-T/4P42W HFP 240V | 2xPL-T/4P42W | 4800 |
| FBH225 2xPL-T/4P32W HFP 240V | 2xPL-T/4P32W | 4800 |
| FBH225 1xPL-C26W EBW | 1xPL-C26W | 2625 |
| FBH225 2xPL-C26W EBW | 2xPL-C26W | 3250 |
| ZZG225 T | accessory | 630 |
| ZZG225 DR DG | accessory | 630 |
| ZZG225 DR | accessory | 600 |

Recess mounting downlighter, with decorative PBT housing. Option of glass attachment with Chrome plated Reflector / ABS reflector / Turbo louvre. Complete luminaire comprises of both 'housing' & 'attachments'.

Indoor Commercial

Downlighters



Space -
FBH 250

| Type | For lamp | LP (Rs.) |
|-------------------------|---------------|----------|
| FBH250 2xPL-T/4P26W HF | 2xPL-T/4P26W | 3400 |
| FBH250 2xPL-T/4P 32W HF | 2xPL-T/4P 32W | 4700 |
| FBH250 2xPL-T/4P42W HF | 2xPL-T/4P42W | 4700 |

Recess mounted high performance downlight with high reflectivity reflector and with remote gearbox, suitable for high ceilings.



ZZG 145

| Type | LP (Rs.) |
|---------------|----------|
| ZZG145 M RG-R | 175 |
| ZZG145 M RG-C | 175 |
| ZZG145 M RG-F | 175 |
| GBS145 MTL | 175 |
| GBS145 M RG | 150 |
| GBH145 RG-FR | 150 |


Attachment for FBH145 and FBH145 LH



Soho -
FBH 150

| Type | For lamp | LP (Rs.) |
|--------------------------------|--------------|----------|
| FBH150 M 1xPL-C/2P13W I 240V | 1xPL-C/2P13W | 1100 |
| FBH150 M 2xPL-C/2P13W I 240V | 2xPL-C/2P13W | 1300 |
| FBH150 M 1xPL-C/2P18W I 240V | 1xPL-C/2P18W | 1100 |
| FBH150 M 2xPL-C/2P18W I 240V | 2xPL-C/2P18W | 1300 |
| FBH150 M 2xPL-C/4P18W EBW 240V | 2xPL-C/4P18W | 1900 |
| FBH150 M 1xPL-C/4P18W HFM 240V | 1xPL-C/4P18W | 1350 |
| FBH150 P 2xPL-C 13W EBW P3016 | 2xPL-C 13W | 1900 |

Recessed downlighter with patterned specular finish reflector and semi enclosed gear assembly, suitable for horizontal lamp.




MBX 301

| Type | LP (Rs.) |
|-----------------------|----------|
| MBX301 1xCDM-T70W EWH | 2500 |
| MBX301 1xCDM-T35W EWH | 2500 |
| MBX301 2xCDM-T70W EWH | 4600 |
| MBX301 2xCDM-T35W EWH | 4600 |

Adjustable CDM down lights with option of single and twin lamp combination.

Indoor Commercial

Downlighters



Soho -
FBT 150

| Type | For lamp | LP (Rs.) |
|----------------------------|--------------|----------|
| FBT150 2xPL-C/2P18W I 240V | 2xPL-C/2P18W | 1850 |
| FBT150 2xPL-C/2P13W I 240V | 2xPL-C/2P13W | 1750 |
| FBT150 1xPL-C/2P13W I 240V | 1xPL-C/2P13W | 1500 |
| FBT150 1xPL-C/2P18W I 240V | 1xPL-C/2P18W | 1600 |
| FBH150 M 2xPL-C/4P18W T HF | 2xPL-C/4P18W | 2600 |


Recessed downlighter with patterned specular finish reflector and semi enclosed gear assembly, suitable for horizontal lamp. The luminaire has an integral turbo louver.



FBS 033

| Type | For lamp | LP (Rs.) |
|-------------------------------|-----------|----------|
| FBS033 2xPL-C/4P18W RG-FR EBW | 2xPL-C18W | 1575 |
| FBS033 1xPL-C/4P18W RG-FR HFM | 1xPL-C18W | 1365 |
| FBS033 2xPL-C/4P26W RG-FR EBW | 2xPL-C26W | 2000 |
| FBS033 1xPL-C/4P26W RG-FR EBW | 1xPL-C26W | 1575 |

Recessed mounted square downlight suitable for single and twin lamp PLC 18W and PLC 26W with electronic ballast.



FCS 100

| Type | For lamp | LP (Rs.) |
|----------------------------|--------------|----------|
| FCS100 1xPL-C/2P18W I 240V | 1xPL-C/2P18W | 1200 |
| FCS100 1xPL-C/2P13W I 240V | 1xPL-C/2P13W | 1200 |

Surface mounted downlight luminaire suitable for use with 1x13W/18W PL-C compact fluorescent lamp.

Indoor Commercial


Downlighters



FBS 100

| Type | For lamp | LP (Rs.) |
|------------------------------|--------------|----------|
| FBS100 1xPL-C/2P18W I 240V | 1xPL-C/2P18W | 700 |
| FBS100 1xPL-C/2P13W I 240V | 1xPL-C/2P13W | 700 |
| FBS100 1xPL-C/2P10W I 240V | 1xPL-C/2P10W | 700 |
| FBS100 1xPL-C/4P18W HFM 240V | 1xPL-C/4P18W | 1450 |
| FBS100 1xPL-C/4P13W HFM 240V | 1xPL-C/4P13W | 1450 |

Recessed mounted downlight luminaire suitable for use with 1x13W/18W PL-C compact fluorescent lamp.



MBS 050

| Type | For lamp | LP (Rs.) |
|----------------------------|-------------|----------|
| MBS050 1xCDM-TD70W IC 240V | 1xCDM-TD70W | 2950 |


Recessed downlighter suitable for use with metal halide lamp, inclusive of gear for 70 watts metalhalide lamp.



MBS 205

| Type | For lamp | LP (Rs.) |
|-----------------------------|--------------|----------|
| MBS205 1xCDM-TD70W IC 240V | 1xCDM-TD70W | 4000 |
| MBS205 1xCDM-TD150W IC 240V | 1xCDM-TD150W | 4400 |

Low glare recessed downlighter suitable for use with metal halide lamp, inclusive of gear box.



MBS 150

| Type | For lamp | LP (Rs.) |
|------------------------------|-------------|----------|
| MBS150 1xCDM-T 35W / 70W HSG | 1xCDM-T 70W | 1200 |

Fixed CDM downlighter suitable for use with metal halide lamp. Control gear to be ordered separately as above.



MBS 175

| Type | For lamp | LP (Rs.) |
|---------------------------|--------------|----------|
| MBS175 1xCDM-T35/70W E-HF | 1xCDM-35/70W | 1800 |
| ZKL200 1xCDM-T70W | 1xCDM-T70W | 2400 |

Adjustable CDM downlighter suitable for use with metal halide lamp. Housing and gear to be ordered separately as above.

Indoor Commercial

Downlighters



MCS 250

| Type | For lamp | LP (Rs.) |
|-----------------------|-------------|----------|
| MCS250/1xCDM-TD70W HF | 1xCDM-TD70W | 7000 |

Aesthetically designed cylindrical downlight suitable for 1xCDM-TD 70w lamp. The luminaire has a horizontal lamp position with high efficiency glossy reflector for better light distribution. It has an Electronic gear which provides an excellent lighting solution.



TBS 207

| Type | For lamp | LP (Rs.) |
|-------------------------------|-----------|----------|
| TBS207 2xTL-D36W HF A | 2xTL-D36W | 3400 |
| TBS207 1xTL-D36W HFB A | 1xTL-D36W | 3200 |
| TBS207 2xTL-D36W A HF EBT 236 | 2xTL-D36W | 3600 |
| FBS207 2xPL-L36W EB A | | |

Recessed mounted luminaire suitable for TLD and PLL 36W lamps for vertical lighting with asymmetric light distribution for indoor application.



MBS 070

| Type | LP (Rs.) |
|-----------------------|----------|
| MBS070 1xCDM-T35W HWH | 1800 |
| MBS070 1xCDM-T70W HWH | 1800 |

Fully adjustable CDM downlighter suitable for use with metal halide lamp. Housing and gear to be ordered separately.



MBS 071

| Type | LP (Rs.) |
|-----------------------|----------|
| MBS071 1xCDM-T70W HWH | 2100 |
| MBS071 1xCDM-T35W HWH | 2100 |

Fully adjustable CDM downlighter suitable for use with metal halide lamp. Housing and gear to be ordered separately as above.



MBS 072

| Type | LP (Rs.) |
|------------------------|----------|
| MBS072 1xCDM-TD70W HWH | 1350 |

Recessed mounted downlighter suitable for MH / CDM lamp. Housing and gear to be ordered separately.

Indoor Commercial

Downlighters

46



MBS 073

| Type | LP (Rs.) |
|---|----------|
| MBS073 1xCDM-TD70W H WH | 1650 |
| Recessed mounted downlighter suitable for MH / CDM lamp. Housing and gear to be ordered separately. | |



MBS 074

| Type | LP (Rs.) |
|---|----------|
| MBS074 1xCDM-TD70W H WH | 1700 |
| Recessed mounted downlighter suitable for MH / CDM lamp. Housing and gear to be ordered separately. | |



RCS 170/
ZCS 170

| Type | LP (Rs.) |
|--|----------|
| RCS170 IC LI000 WH | 1260 |
| RCS170 IC L2000 WH | 2250 |
| ZCS170 IC ICP WH | 320 |
| ZCS170 IC LCP WH | 450 |
| ZCS170 ICTCP WH | 450 |
| IC track and related accessories for mounting of projectors. | |

Indoor Commercial

Projectors

47



UnicOne*

| Type | For lamp | LP (Rs.) |
|----------------------------------|----------------|----------|
| MRS541 C 1xCDM-TM20W EB 12 IC WH | 1xCDM-TM20W | 12500 |
| MRS541 C 1xCDM-TM35W EB 12 IC WH | 1xCDM-TM35W | 12500 |
| MRS551 C 1xCDM-TC35W EB 12 IC WH | 1xCDM-TC35W | 11700 |
| MRS551 C 1xCDM-TC70W EB 12 IC WH | 1xCDM-TC70W | 11800 |
| MRS553 C 1xCDM-R111-35W EB IC WH | 1xCDM-R111-35W | 12750 |
| MRS553 C 1xCDM-R111-70W EB IC WH | 1xCDM-R111-70W | 13500 |

UnicOne –Track Mounted
Compact IC -Track mounted CDM Spot light available in multiple beam angles. Surface mounted version is also available.



Arctone*

| Type | For lamp | LP (Rs.) |
|----------------------------------|-------------|----------|
| MRS531 C 1xCDM-Tm35W EB 12 IC WH | 1xCDM-Tm35W | 11700 |
| MRS531 C 1xCDM-Tm20W EB 12 IC WH | 1xCDM-Tm20W | 12000 |
| MRS532 C 1xCDM-TC35W EB 12 IC WH | 1xCDM-TC35W | 11500 |
| MRS532 C 1xCDM-TC70W EB 12 IC WH | 1xCDM-TC70W | 11500 |

Arctone – Track
High Efficiency IC-Track mounted spot lights with unique profiles. Surface Mounted version is also available on request.



UnicOne
Micro,
projector

| Type | For lamp | LP (Rs.) |
|---------------------------------|-------------|----------|
| MCS541 C 1xCDM-Tm20W EB 36 BAWH | 1xCDM-Tm20W | 11700 |
| MCS541 C 1xCDM-Tm35W EB 36 BAWH | 1xCDM-Tm35W | 11800 |

UnicOne – Micro projector
UnicOne Projector Micro is a rotation-symmetrical design projector that offers powerful lighting accents.

*The product are also available in Multiple beam angles- 24, 36 Degrees on request.

Indoor Commercial

Projectors

48



MRS 501

| Type | For lamp | LP (Rs.) |
|----------------------------------|-------------|----------|
| MRS501 C 1xCDM-T35W EB 12 IC WH | 1xCDM-T35W | 10900 |
| MRS501 C 1xCDM-T70W EB 12 IC WH | 1xCDM-T70W | 11700 |
| MRS501 C 1xCDM-T150W EB 12 3C WH | 1xCDM-T150W | 21500 |
| MRS502 C 1xCDM-TC35W EB 12 IC WH | 1xCDM-TC35W | 10500 |
| MRS502 C 1xCDM-TC70W EB 12 IC WH | 1xCDM-TC70W | 10500 |
| MRS503 C 1xCDM-Tm20W EB 12 IC WH | 1xCDM-Tm20W | 12500 |
| MRS503 C 1xCDM-Tm35W EB 12 IC WH | 1xCDM-Tm35W | 12800 |

Magenous – Track Mounted
IC-Track mounted versatile spots lights with wide range of lamp options. Surface mounted version is also available.



MCS 501

| Type | For lamp | LP (Rs.) |
|----------------------------------|-------------|----------|
| MCS501 C 1xCDM-T70W EB 36 BA WH | 1xCDM-T70W | 11200 |
| MCS501 C 1xCDM-T35W EB 36 BA WH | 1xCDM-T35W | 11200 |
| MCS502 C 1xCDM-TC70W EB 36 BA WH | 1xCDM-TC70W | 11800 |
| MCS503 C 1xCDM-Tm20W EB 12 BA WH | 1xCDM-Tm20W | 12800 |

The Magneos family of projectors represents an outstanding lighting tool for shops, packing advanced Philips technology into a compact, contemporary design to deliver dramatic accent lighting effects.

Indoor Commercial

Accent Lighting

49



QBS 641

| Type | For lamp | LP (Rs.) |
|-----------------------------------|--------------|----------|
| QBS641 1xHAL-MR50-50W E-HF 12V WH | 1xHAL-MR 50W | 700 |


Recessed adjustable accent lighting luminaire. Separate electronic transformer required.



QBS 651

| Type | For lamp | LP (Rs.) |
|-------------------------------------|--------------|----------|
| QBS651 M 1xHAL-MR50-50W E-HF 12V WH | 1xHAL-MR 50W | 650 |


Recessed adjustable accent lighting luminaire. Separate electronic transformer required.



QBS 652

| Type | For lamp | LP (Rs.) |
|-----------------------------------|--------------|----------|
| QBS652 1xHAL-MR50-50W E-HF 12V WH | 1xHAL-MR 50W | 750 |

Recessed adjustable accent lighting luminaire. Separate electronic transformer required.



QBS 024
QBS 025

| Type | LP (Rs.) |
|-------------------------------|----------|
| QBS024 1x MAX50W/12V-GU5.3 WH | 290 |
| QBS025 1x MAX50W/12V-GU5.3 WH | 290 |

Smart Halogen Range - A range of recessed adjustable accent lighting luminaire with option of fixed and adjustable options.



QBS 026
QBS 027

| Type | LP (Rs.) |
|-------------------------------|----------|
| QBS026 1x MAX50W/12V-GU5.3 WH | 275 |
| QBS027 1x MAX50W/12V-GU5.3 WH | 400 |

Smart Halogen Range - A range of recessed adjustable accent lighting luminaire with option of fixed and adjustable options.


Indoor Commercial

Accent Lighting




QBS 028
QBS 029

| Type | LP (Rs.) |
|---|----------|
| QBS028 1x MAX50W/12V-GU5.3 WH | 700 |
| QBS029 1x MAX50W/12V-GU5.3 WH | 700 |
| Smart Halogen Range - A range of recessed adjustable accent lighting luminaire with option of fixed and adjustable options. | |




QBS 040
QBS 041
QBS 042

| Type | LP (Rs.) |
|---|----------|
| QBS040 1x MAX50W/12V-GU5.3 WH | 820 |
| QBS041 1x MAX50W/12V-GU5.3 WH | 920 |
| QBS042 1x MAX50W/12V-GU5.3 WH | 820 |
| Smart MR16 Deep Recessed Range - A range of deep recessed down lights with suitable for MR16 lamps, with the option of symmetrical and assymitrical distribution. | |



QBS 043
QBS 044
QBS 046

| Type | LP (Rs.) |
|---|----------|
| QBS043 1x MAX50W/12V-GU5.3 WH | 920 |
| QBS044 1x MAX50W/12V-GU5.3 WH | 820 |
| QBS046 1x MAX50W/12V-GU5.3 WH | 820 |
| Smart MR16 deep recessed range - A range of deep recessed down lights with suitable for MR16 lamps, with the option of symmetrical and assymitrical distribution. | |



QBS 047
QBS 048

| Type | LP (Rs.) |
|---|----------|
| QBS047 1x MAX50W/12V-GU5.3 WH | 820 |
| QBS048 1x MAX50W/12V-GU5.3 WH | 850 |
| Smart MR16 deep recessed range - A range of deep recessed down lights with suitable for MR16 lamps, with the option of symmetrical and assymitrical distribution. | |



DNS622

| Type | For lamp | LP (Rs.) |
|--|------------|----------|
| DNS622 1xA60-100W WH | 1xA60-100W | 700 |
| Recessed accent lighting luminaire with matt finish reflector. | | |

Indoor Commercial

Decobay and Pendants



FPK 550

| Type | For lamp | LP (Rs.) |
|---|--------------|----------|
| FPK550 2xPL-C/4P26W HFB | 2xPL-C/4P26W | 4200 |
| FPK550 2xPL-C/2P26W I | 2xPL-C/2P26W | 4000 |
| FPK550 1xPL-C/4P26W HFB | 1xPL-C/4P26W | 3450 |
| GPK550 PCR | | 3200 |
| ZPK550 PC | | 3200 |
| Suspended prismatic Decobay luminaire suitable for CFL Lamps. Housing and Bowl to be ordered seperately. Front cover, if required has to be ordered separately. | | |



MPK 550

| Type | For lamp | LP (Rs.) |
|---|------------|----------|
| MPK550 1xCDM-T70W IC 240V | 1xCDM-T70W | 4800 |
| MPK550 1xCDM-T70W EB | 1xCDM-T70W | 5150 |
| Decorative and easy to install decobay indoor luminaire with integral control gear. Available in PLC 26W and CDM-T 70W lamp versions. | | |



MPK 541

| Type | For lamp | LP (Rs.) |
|--|-------------|----------|
| MPK541 C 1xCDM-TM35W EB 36 ICWH | 1xCDM-TM35W | 13600 |
| MPK541 C 1xCDM-Tm35W EB 36 BAWH | 1xCDM-Tm35W | 13600 |
| UnicOne Pendant Micro is a small, decorative suspended luminaire designed for use above reception desks, restaurant tables, cashier and hospitality areas. | | |



Case Study

more.

More
Supermarkets
Bangalore, India

“We were looking for upgrading lighting at our stores for saving energy costs and also enhancing customer experience. We are happy that we chose Philips LED lighting.”

- Mr. Arun Kapur, Manager - City Operations, Aditya Birla Retail Ltd.

Product



GreenPerform



Case Study

UniverCell
The Mobile Experts

UniverCell
Chennai, India

“Earlier we were putting more lights which were consuming more energy and costs. With Philips LED lights, we have to use lesser number of lights but with better light output. Customers are spending more time in our stores, which is directly improving our sales.”

- Satish Babu, Founder and Managing Director - UniverCell

Product



GreenLED

Case Study



Brown Tree
Chennai, India



“Lighting is very important for any retail store. We wanted to cut down on existing electricity bills and were exploring different ways of reducing it. Post changing to Philips LED lighting, I m saving lot of electricity cost and customer experience has also improved since lighting is now more inviting & soothing.”

- Mr. Abhinandan Lunkad, Partner, Brown Tree Stores

Product



GreenLED



“This is the first time HCL has done a green building for office use. Energy consumption for the whole building was an issue, including lighting. We were looking for low density lighting throughout the building, including outdoor areas, so that we are able to save lot of energy for achieving LEED certification. For achieving this, we were looking for a lighting partner and got the answer in Philips.”

- Mr. Pranab Nandy, General Manager – Projects, HCL Technologies

Products



Sereno



FBH145



RoadStar



Case Study



Cognizant
Technologies
Bangalore, India

“When Cognizant wanted to build its new office in a cost effective and forward thinking manner, Philips provided LED lighting solution that is energy efficient, flexible and enhances light output at the same time.”

- Mr. CS Murali, Chief of Corporate Affairs, Cognizant Technologies - India

Product



Ledo



Sales India
Ahmedabad, India



“Lighting plays a very important role in retail environment. Philips solution has worked out really well & results are beautiful.”

Jose John, Managing Director, Sales India Pvt Ltd

Product



Cirrus

Indoor Industrial



Indoor Industrial

Battens



GreenPerform

| Type | LP (Rs.) |
|--------------------------------|----------|
| BN208C LED40/DL LI 200 FR | 8000 |
| BN208C LED40/CDL LI 200 FR | 8000 |
| BN208C LED40/NW LI 200 FR | 8000 |
| AC208C MB S (mounting bracket) | 120 |
| AC208C MB A (mounting bracket) | 120 |
| AC208P MB S (mounting bracket) | 120 |
| AC208P MB A (mounting bracket) | 120 |

GreenPerform LED batten is an innovative, technology leading solution for conventional twin lamp battens.



TMC 501

| Type | LP (Rs.) |
|-------------------|----------|
| TMC 501 P 1xT-LED | 750 |
| TMC 501 P 2xT-LED | 850 |


Mounting rail for TLED lamps



Proton - TMS 021

| Type | For lamp | LP (Rs.) |
|----------------------|-----------|----------|
| TMS021 1xTL-D36W I | 1xTL-D36W | 900 |
| TMS021 1xTL-D36W IC | 1xTL-D36W | 920 |
| TMS021 1xTL-D36W EBE | 1xTL-D36W | 990 |
| TMS021 1xTLD36W EBT | 1xTL-D36W | 1050 |
| TMS021 2xTL-D36W I | 2xTL-D36W | 1230 |
| TMS021 2xTL-D36W IC | 2xTL-D36W | 1250 |
| TMS021 2xTL-D36W EBE | 2xTL-D36W | 1250 |
| TMS021 2xTL-D36W EBT | 2xTL-D36W | 1350 |
| GMS021 36R | accessory | 550 |

Mounting rail for fluorescent lamps with special integral lamp holder and bracket.



TMS 022

| Type | For lamp | LP (Rs.) |
|---------------------|-----------|----------|
| TMS022 1xT5-28W HFB | 1xT5-28W | 890 |
| GMS022 R I 28 | accessory | 290 |

Extra slim batten with only 27 mm width suitable for single T5 28W lamp Use ZMS022 MB bracket for conduit mounting. Available with symmetric and asymmetric reflector:

Indoor Industrial

Battens



Pentura - TMS 122

| Type | For lamp | LP (Rs.) |
|------------------------|-----------|----------|
| TMS122 M 1xTL5-28W EBT | 1xTL5-28W | 1370 |
| TMS122 M 1xTL5-28W EBE | 2xTL5-28W | 1070 |
| TMS122 M 2xTL5-28W EBT | 1xTL5-28W | 1770 |
| TMS122 M 2xTL5-28W EBE | 2xTL5-28W | 1470 |
| TMS122 M 1xTL5-54W EBP | 1xTL5-54W | 1710 |
| TMS122 M 2xTL5-54W EBP | 2xTL5-54W | 2370 |
| GMS122 128R | accessory | 500 |
| GMS122 228R | accessory | 500 |

Industrial batten suitable for TL5 lamp 28W. Available with optional reflector:



TMC 055

| Type | For lamp | LP (Rs.) |
|----------------------|-----------|----------|
| TMC055 1xTL-D36W IC | 1xTL-D36W | 1000 |
| TMC055 1xTL-D36W EBE | 1xTL-D36W | 1000 |
| TMC055 1xTLD-36W EBT | 1xTL-D36W | 1295 |
| TMC055 2xTL-D36W IC | 2xTL-D36W | 1450 |
| TMC055 2xTL-D36W EBE | 2xTL-D36W | 1450 |
| TMC055 2xTL-D36W EBT | 2xTL-D36W | 2010 |
| GMC055 E-WB | accessory | 1250 |

Mounting rail for fluorescent lamps.



TMC 501

| Type | For lamp | LP (Rs.) |
|----------------------|-----------|----------|
| TMC501 1xTL-D36W I | 1xTL-D36W | 1030 |
| TMC501 1xTL-D36W IC | 1xTL-D36W | 1050 |
| TMC501 1xTL-D36W EBE | 1xTL-D36W | 1050 |
| TMC501 1xTLD36W EBT | 1xTL-D36W | 1200 |
| TMC501 2xTL-D36W IC | 2xTL-D36W | 1300 |
| TMC501 2xTL-D36W EBE | 2xTL-D36W | 1300 |
| TMC501 2xTL-D36W EBT | 2xTL-D36W | 1750 |
| GMC501 WR | accessory | 710 |

Mounting rail for fluorescent lamps.

Indoor Industrial

Battens and Special Luminaires



TKC 24

| Type | For lamp | LP (Rs.) |
|---------------|-----------|----------|
| TKC24/136 HPF | 1xTL-D36W | 2250 |
| TKC24/236 HPF | 2xTL-D36W | 2700 |
| TKC24/136 EBT | 1xTL-D36W | 2545 |
| TKC24/236 EBT | 2xTL-D36W | 3260 |

Industrial luminaire for fluorescent lamp with vitreous enamelled/powder coated reflector. Consisting of TMC 55 rail and GMC 055.



TKC 203

| Type | For lamp | LP (Rs.) |
|----------------------|-----------|----------|
| TKC203 1xTL-D36W IC | 1xTL-D36W | 1760 |
| TKC203 1xTL-D36W EBT | 1xTL-D36W | 1910 |
| TKC203 2xTL-D36W IC | 2xTL-D36W | 2010 |
| TKC203 2xTL-D36W EBT | 2xTL-D36W | 2460 |

Industrial luminaire for fluorescent lamps with powder coated reflector. Consisting of TMC 501 rail and GMC 501.



TMX095

| Type | For lamp | LP (Rs.) |
|--------------------|----------|----------|
| TMX095 2xTL-40W IC | 2xTL-40W | 6800 |

Industrial luminaire for fluorescent lamps (corrosion proof) complete with all accessories.

Indoor Industrial

Special Luminaires



Waterproof - TCW 450

| Type | For lamp | LP (Rs.) |
|-----------------------|-----------|----------|
| TCW450 1xTL-D36W EBT | 1xTL-D36W | 3200 |
| TCW450 2xTL-D36W EBT | 2xTL-D36W | 3800 |
| TCW450 1xTL5-28W EBT | 1xTL5-28W | 3300 |
| TCW450 2xTL5-28W EBT | 2xTL5-28W | 3900 |
| TCW450 P 2xTL5-54W HF | 2xTL5-54W | 5000 |

IP65 waterproof luminaire. Suitable for fluorescent lamps.



CLARIA - FBS 650

| Type | For lamp | LP (Rs.) |
|-----------------------------|-----------|----------|
| FBS650 3xPL-L36W EBP ROP GT | 3xPL-L36W | 9550 |
| FBS650 3xPL-L36W EBP ROP AC | 3xPL-L36W | 9550 |
| FBS650 3xPL-L36W EBP FOP GT | 3xPL-L36W | 9550 |
| FBS650 3xPL-L36W EBP FOP AC | 3xPL-L36W | 9550 |
| FCS650 3xPL-L36W EBP FOP GT | 3xPL-L36W | 9450 |
| FCS650 2xPL-L36W EBP FOP GT | 2xPL-L36W | 9250 |
| TBS670 2x36W TL-D ROP GT | TL-D36W | 9950 |
| TBS670 2x36W TL-D FOP GT | TL-D36W | 9150 |

Clean room luminaire available in front and rear opening versions. Suitable for PLL-36 and TLD-36 lamps. Available with acrylic and glass option.



CLARIA Plus

| Type | For lamp | LP (Rs.) |
|--------------------------------|-----------|----------|
| FBS65 I 3xPL-L36W EB AL FOP GT | 3xPL-L36W | 7100 |
| FBS65 I 3xPL-L36W EB CR FOP GT | 3xPL-L36W | 6700 |
| TBS65 I 4xTL5-14W EB AL FOP GT | 4xTL5-14W | 7100 |
| TBS65 I 4xTL5-14W EB CR FOP GT | 4xTL5-14W | 6700 |
| TBS65 I 4xTL5-24W EB AL FOP GT | 4xTL5-24W | 7900 |
| TBS65 I 4xTL5-24W EB CR FOP GT | 4xTL5-24W | 7700 |
| FBS65 I 3xPL-L36W EB AL FOP CA | 3xPL-L36W | 7100 |
| FBS65 I 3xPL-L36W EB CR FOP CA | 3xPL-L36W | 6700 |
| TBS65 I 4xTL5-14W EB AL FOP CA | 4xTL5-14W | 7100 |
| TBS65 I 4xTL5-14W EB CR FOP CA | 4xTL5-14W | 6700 |
| TBS65 I 4xTL5-24W EB AL FOP CA | 4xTL5-24W | 7900 |
| TBS65 I 4xTL5-24W EB CR FOP CA | 4xTL5-24W | 7700 |

Front openable clean room luminaire suitable for PL-36W/TL-5 14W and TL-5 24W. Available with clear acrylic and glass option.

Indoor Industrial

HighBay Luminaires



GreenBay

| Type | LP (Rs.) |
|--|----------|
| BY400V LED70S CW SK PSU SI FGWH | 32000 |
| BY400V LED70S CW AK PSU SI FGWH | 32000 |
| BY400V LED135S CW SK PSU SI FGWH | 52000 |
| BY400V LED135S CW AK PSU SI FGWH | 52000 |
| AC400P WH-suspended (mounting accessory) | 3500 |
| AC400C WH-surface (mounting accessory) | 1800 |

GreenBay solution is an integrally designed, versatile lighting solution from Philips to address different lighting requirements within the industrial space.



Optibay - HPK 225

| Type | For lamp | LP (Rs.) |
|-----------------------|------------|----------|
| HPK225 1xSON150W NB | SON 150W E | 5480 |
| HPK225 1xSON250W NB | SON 250W E | 6130 |
| HPK225 1xSON400W NB | SON 400W E | 7280 |
| HPK225 1xHPL-N250W NB | HPL-N250W | 5580 |
| HPK225 1xHPL-N400W NB | HPL-N400W | 6100 |
| HPK225 1xSON150W WB | SON 150W E | 5510 |
| HPK225 1xSON250W WB | SON 250W E | 6160 |
| HPK225 1xHPL-N250W WB | HPL-N250W | 5610 |

HighBay luminaire open version with anodized aluminium narrow beam and wide beam reflector. Comprises of housing (HPK), reflector (HPK reflector).

Indoor Industrial

HighBay Luminaires



Optibay - HPK 225

| Type | For lamp | LP (Rs.) |
|-----------------------------|------------------|----------|
| HPK225 1xSON150W NB GL | SON 150W E | 6680 |
| HPK225 1xSON250W NB GL | SON 250W E | 7330 |
| HPK225 1xSON400W NB GL | SON 400W E | 8480 |
| HPK225 1xHPL-N250W NB GL | HPL-N250W | 6780 |
| HPK225 1xHPL-N400W NB GL | HPL-N400W | 7300 |
| HPK225 1xHPI-P250W-BU NB GL | HPI-BU plus 250W | 7080 |
| HPK225 1xHPI-P400W-BU NB GL | HPI-BU plus 400W | 7600 |
| HPK225 1xSON150W WB GL | SON 150W E | 6710 |
| HPK225 1xSON250W WB GL | SON 250W E | 7360 |
| HPK225 1xHPL-N250W WB GL | HPL-N250W | 6810 |
| HPK225 1xHPI-P250W-BU WB GL | HPI-BU plus 250W | 7110 |

HighBay luminaire closed version with anodized aluminium narrow beam and wide beam reflector. Comprises of housing (HPK), reflector (HPK reflector) & glass cover (ZPK).



Optibay - HPK 205

| Type | For lamp | LP (Rs.) |
|-----------------------|--------------|----------|
| HPK205 1xHPL-N250W NB | 1xHPL-N 250W | 6560 |
| HPK205 1xHPL-N400W NB | 1xHPL-N 400W | 6960 |
| HPK205 1xSON150W NB | 1xSON 150W | 6760 |
| HPK205 1xSON250W NB | 1xSON 250W | 7110 |
| HPK205 1xSON400W NB | 1xSON 400W | 8390 |
| HPK205 1xHPL-N250W WB | 1xHPL-N 250W | 6490 |
| HPK205 1xSON150W WB | 1xSON 150W | 6790 |
| HPK205 1xSON250W WB | 1xSON 250W | 7140 |

HighBay luminaire open version with anodized aluminium narrow beam and wide beam reflector. Comprises of Housing (HPK), Reflector (HPK reflector).

Indoor Industrial

HighBay Luminaires



Optibay -
HPK 205

| Type | For lamp | LP (Rs.) |
|-----------------------------|---------------|----------|
| HPK205 1xHPL-N250W NB GL | 1xHPL-N 250W | 7660 |
| HPK205 1xHPL-N400W NB GL | 1xHPL-N 400W | 8160 |
| HPK205 1xSON150W NB GL | 1xSON 150W | 7960 |
| HPK205 1xSON250W NB GL | 1xSON 250W | 8310 |
| HPK205 1xSON400W NB GL | 1xSON 400W | 9590 |
| HPK205 1xHPIP250W BU NB GL | 1xHPI-BU 250W | 8360 |
| HPK205 1xXHPIP400W BU NB GL | 1xHPI-BU 400W | 8860 |
| HPK205 1xHPL-N250W WB GL | 1xHPL-N 250W | 7690 |
| HPK205 1xSON150W WB GL | 1xSON 150W | 7990 |
| HPK205 1xSON250W WB GL | 1xSON 250W | 8340 |
| HPK205 1xHPIP250W BU WB GL | 1xHPI-BU 250W | 8390 |

HighBay luminaire closed version with anodized aluminium narrow beam and wide beam reflector. Comprises of housing (HPK), reflector (HPK reflector) & glass cover (ZPK).



Prisbay

| Type | For lamp | LP (Rs.) |
|----------------------------|-----------------|----------|
| HPK225 1xCDM-ET150W PR | 1xCDM-ET150W | 8135 |
| HPK225 1xHPI-BU250W PR | 1xHPI-BU250W | 8535 |
| HPK225 1xHPI-BU400W PR | 1xHPI-BU400W | 11974 |
| HPK205 1xMax PL-EH 65W PR* | 1xMax PL-EH 65W | 4090 |
| HPK205 1xCDM-ET150W PR | 1xCDM-ET150W | 9415 |
| HPK205 1xHPI-BU250W PR | 1xHPI-BU250W | 9815 |
| HPK205 1xHPI-BU400W PR | 1xHPI-BU400W | 13234 |

High performance decorative integral closed medium bay (Midi) luminaire with prismatic diffusers. Comprises of housing (HPK), polycarbonate reflector (GPK225), connector for reflector & housing (GPK225 con) and bottomcover with fixing ring (GPK225 PCC).

*Open only

Indoor Industrial

HighBay & Bulkhead Luminaires



TPS 325

| Type | For lamp | LP (Rs.) |
|-------------------------|------------|----------|
| TPS325 4xTL5-54W EBP AC | 4xTL5-54 W | 8800 |
| TPS325 4xTL5-54W EBP | 4xTL5-54 W | 7500 |
| TPS325 4xTL5-28W EBP AC | 4xTL5-28 W | 7600 |
| TPS325 4xTL5-28W EBP | 4xTL5-28 W | 6300 |
| ZPS325 MB | accessory | 200 |

High performance TL5 HighBay luminaire in Open/Closed version for TL5-54W/28W lamps, suitable for surface, chain and conduit mounting. Provided with constant light output ballast.



TPS330

| Type | For lamp | LP (Rs.) |
|-------------------------|-----------|----------|
| TPS330 4xTL5-54W EBP AC | 4xTL5-54W | 9900 |
| TPS330 4xTL5-28W EBP AC | 4xTL5-28W | 8900 |
| TPS330 4xTL5-54W EBP | 4xTL5-54W | 8100 |
| TPS330 4xTL5-28W EBP | 4xTL5-28W | 6900 |

Advanced High-Bay luminaire suitable for 4xTL5 28 Watt and 4xTL5 54 Watt with option of closed and open version.



EnduraLED-
Bulkhead

| Type | LP (Rs.) |
|---------------------------|----------|
| WT202W LED6S CW PSU S1 PC | 3000 |

An innovative and reliable LED solution that fits seamlessly in a variety of applications and serves as a simple energy efficient alternative to CFL/incandescent bulkhead luminaires.



Bulkhead -
NXC 101

| Type | For lamp | LP (Rs.) |
|-----------------------------|-----------|----------|
| NXC101 1xA60-60W-CL B22 GR | 1xGLS 60W | 850 |
| FXC101 1xPL-S / 2P 9W AC GR | 1xPL-S 9W | 1050 |

(Available in grey and red colours with a choice of clear or opal acrylic cover). Bulkhead luminaire.

Indoor Industrial

Wellglass Luminaires



EnduraLED-Well Glass

| Type | LP (Rs.) |
|-----------------------------|----------|
| BY200P LED 275 CW PSU S1 PC | 8000 |


Innovative LED based well glass luminaire for direct replacement of 70W HPSV conventional fixtures. EnduraLED has the potential to save > 40%* energy without compromising lighting parameters in the existing installation.



Endura PLUS - HPK 150

| Type | For lamp | LP (Rs.) |
|--------------------|-------------|----------|
| HPK150 1xSON-E70W | 1xSON-E70W | 2945 |
| HPK150 1xSON-I 70W | 1xSON-I 70W | 2645 |
| HPK150 1xHPL-N80W | 1xHPL-N80W | 2595 |
| HPK150 1xHPL-N125W | 1xHPL-N125W | 2645 |

Integral well glass luminaire suitable for use with high pressure sodium vapour SON70 (Eorl) lamps or high pressure mercury vapour HPL N 80w/125W lamps.



Endura - HPK 105

| Type | For lamp | LP (Rs.) |
|------------|-----------|----------|
| HPK105/118 | 1xPL-C18W | 2200 |
| HPK105/218 | 2xPL-C18W | 2700 |

Integral industrial well glass luminaire, pressure die cast aluminium construction, (IP 65) ingress protection, top as well as side mounting options.



Non-Integral Well Glass - NDC 203

| Type | For lamp | LP (Rs.) |
|--------------------------------|-----------------|----------|
| NONINT INDL WELGLAS LUM NDC203 | 1xGLS 200W max. | 1550 |
| NDC203 1xHPL-N80W* | 1xHPL-N 80W | 4050 |
| NDC203 1xHPL-N125W* | 1xHPL-N 125W | 4100 |
| NDC203 1xSON-E70W* | 1xSON 70W E | 4650 |
| NDC203 1xSON-I70W* | 1xSON 70W I | 4250 |

Non integral industrial wellglass luminaire with separate CG box.



Non-Integral Well Glass - NDC 021

| Type | For lamp | LP (Rs.) |
|--------------------|-------------|----------|
| NDC021 MAX250W-E40 | 1xGLS 500W | 3195 |
| NDC021 1xSON 150W | 1xSON 150W | 7545 |
| NDC021 1xSON250W | 1xSON 250W | 7895 |
| NDC021 1xHPLN 250 | 1xHPLN 250W | 7245 |

Non integral industrial wellglass luminaire with separate CG box for discharge lamps.

Indoor Industrial

Under Canopy & LowBay Luminaires



GreenBay

| Type | LP (Rs.) |
|----------------------------------|----------|
| BY400V LED70S CW SK PSU S1 FGWH | 32000 |
| BY400V LED70S CW AK PSU S1 FGWH | 32000 |
| BY400V LED135S CW SK PSU S1 FGWH | 52000 |
| BY400V LED135S CW AK PSU S1 FGWH | 52000 |
| AC400B WH-Recess | 1800 |

GreenBay solution is an integrally designed, versatile lighting solution from Philips to address different lighting requirements within the industrial space.



Multitude

| Type | For lamp | LP (Rs.) |
|----------------------------------|---------------|----------|
| MPF900 1xCDM-TT 250W IC S WH | 1xCDM-TT 250W | 7600 |
| MPF900 1xCDM-TT 250W IC A WH | 1xCDM-TT 250W | 7600 |
| MPF900 1xSON-TP 150W IC S WH | 1xSON-TP 150W | 7390 |
| MPF900 1xSON-TP 150W IC A WH | 1xSON-TP 150W | 7390 |
| MPF900 1xCDM-TD 150W IC S WH | 1xCDM-TD 150W | 7600 |
| MPF900 1xCDM-TD 150W IC A WH | 1xCDM-TD 150W | 7600 |
| MPF920 1xCDM-TD 150W IC S WH | 1xCDM-TD 150W | 7390 |
| MPF920 1xCDM-TD 150W IC A WH | 1xCDM-TD 150W | 7390 |
| MPF910 1xCDM-TD 150W IC S WH | 1xCDM-TD 150W | 7390 |
| MPF910 1xCDM-TD 150W IC A WH | 1xCDM-TD 150W | 7390 |
| MPF 900 1xHPI-T 250W IC HGR S WH | 1xHPI-T 250W | 7285 |
| MPF 900 1xHPI-T 250W IC HGRA WH | 1xHPI-T 250W | 7285 |

Integral recessed/surface and pole mounted multi-utility luminaire suitable for SON/CDMTT CDM-TD/HDIT lamp. Symmetric & asymmetric reflector option.



MPF 922

| Type | For lamp | LP (Rs.) |
|--------------------|-------------|----------|
| MPF922 1xMHNTD70W | 1xMHNTD70W | 5500 |
| MPF922 1xMHNTD150W | 1xMHNTD150W | 5920 |

Integral symmetric petrol station luminaire with cast aluminium housing (IP 65).

Case Study



L&T Steel
Hazira, India



“We wanted to use best products for our new plant at Hazira including best lighting products. Philips partnered with us at various stages of this project through lighting simulations. Philips is known for its quality products and we are happy that we chose them for our lighting needs.”

- Mr R.G. Kulkarni, CEO, L&T Special Steels and Heavy Forging

Products



PowerBalance



RVP302



HPK225

Case Study



Nestlé

Tahliwal, India



Products



RoadStar



Prolux

Outdoor Luminaires



Outdoor Luminaires

Street Lighting Luminaires



GreenLine Smart

| Type | MRP (Rs.) |
|--|-----------|
| BRP020 1x10 LED | 5630 |
| Philips GreenLine Smart luminaire is perfect for secondary roads and pathways. It sports a compact body, which offers a highly efficient lighting solution as compared to fluorescent and CFL street lights. | |



RoadStar

| Type | LP (Rs.) |
|--|------------|
| GPLS 30 LED 40W/45W LEH2 240/50Hz NP | on request |
| GPLS 30 LED 60W/68W LEH2 240/50Hz NP | on request |
| GPLS 49 LED 65W/73W LEH2 240/50Hz NP | on request |
| GPLS 49 LED 90W/102W LEH2 240/50Hz NP | on request |
| GPLM 79 LED 150W/170W LEH2 240/50Hz NP | on request |
| GPLM 98 LED 180W/204W LEH2 240/50Hz NP | on request |
| Philips Lumec road lighting luminaire is dark-sky compliant using unique, sealed optics with vibration resistant design, offering better light control, uniformity and upto 8 times spacing between poles. | |



GreenLine Range

| Type | LP (Rs.) |
|---|----------|
| BRP 320 1x24 LED | 14000 |
| BRP 320 2x24 LED | 30000 |
| Philips road lighting luminaire with high power led and unique peanut lens to ensure uniform distribution, higher spacing between poles and maintenance free system, Ideal for road width upto 8 mts. | |



GreenLine Xtra

| Type | LP (Rs.) |
|--|----------|
| BRP322 48LED CW 71 PC S1 PSU GR | 35000 |
| BRP322 48LED CW 75 FG S1 PSU GR | 35000 |
| BRP322 48LED CW 90 PC S1 PSU GR | 38000 |
| BRP322 48LED CW 95 FG S1 PSU GR | 38000 |
| BRP322 64LED CW 95 PC S1 PSU GR | 38000 |
| BRP322 64LED CW 100 FG S1 PSU GR | 38000 |
| BRP322 64LED CW 118 PC S1 PSU GR | 40000 |
| BRP322 64LED CW 125 FG S1 PSU GR | 42000 |
| Philips road lighting luminaire with high power led and unique peanut lens with choice of optics to ensure uniform distribution, higher spacing between poles and maintenance free system, Ideal for road width upto 10 mts. | |

Outdoor Luminaires

Street Lighting Luminaires



Street Light - HGS 120

| Type | For lamp | LP (Rs.) |
|--|-----------|----------|
| HGS120 1xTL-D36W IC | 1xTL-D36W | 1900 |
| HGS120 1xTL5-28W EBE | 1xTL5-28W | 2020 |
| HGS120 2xTL5-28W EBE | 2xTL5-28W | 2370 |
| HGS120 2xTL5-54W EBP | 2xTL5-54W | 3120 |
| Fluorescent street light luminaire with sheet aluminium housing and UV stabilized acrylic cover. | | |



Street Light - FGS 120

| Type | For lamp | LP (Rs.) |
|--|-----------|----------|
| FGS120 1xPL-L36W HF | 1xPL-L36W | 1680 |
| CFL Street light luminaire with sheet Al housing with UV stabilised acrylic cover. | | |



Street Light - SRP 308/HRP 308

| Type | For lamp | LP (Rs.) |
|---|--------------|----------|
| SRP308 1xSON70W FG | 1xSON70W (E) | 4015 |
| SRP308 1xSON-I-70W FG | 1xSON70W (I) | 3850 |
| HRP308 1xHPLN125W FG | 1xHPLN125W | 3795 |
| Street light luminaire with heat resistant toughened glass cover. | | |



Street Light - SRP 308/HRP 308

| Type | For lamp | LP (Rs.) |
|--|--------------|----------|
| SRP308 1xSON70W AC | 1xSON70W (E) | 4070 |
| SRP308 1xSON-I-70W AC | 1xSON70W (I) | 3905 |
| HRP308 1xHPLN125W AC | 1xHPLN125W | 3740 |
| Street light luminaire with UV stabilized acrylic cover. | | |




Street Light - SRX 066/HRX 066

| Type | For lamp | LP (Rs.) |
|--|-------------------|----------|
| SRX066 1xSON-I-70W | 1xSON/SONT70W (I) | 3900 |
| SRX066 1xSON70W | 1xSON/SONT70W (E) | 4000 |
| HRX066 1xHPLN-125W | 1xHPLN-125W | 3730 |
| Street light luminaire with single piece deep drawn aluminium housing, POT optics reflector and UV stabilized acrylic cover. | | |

Outdoor Luminaires

Street Lighting Luminaires



Street Light - SRX 086

| Type | For lamp | LP (Rs.) |
|------------------|---------------------|----------|
| SRX086 1xSON150W | 1xSON/ SONT150W | 5840 |
| SRX086 1xSON250W | 1xSON / SONT250W | 6490 |

Street light luminaire with single piece deep drawn aluminium housing, POT optics reflector and UV stabilized acrylic cover with universal ballast.



Street Light- SRX 051 / HRX 051 / MRX051

| Type | For lamp | LP (Rs.) |
|--------------------|--------------------|----------|
| SRX051 1xSON150W | 1xSON/ SONT150W | 6800 |
| SRX051 1xSON250W | 1xSON/ SONT250W | 7400 |
| HRX051 1xHPLN250W | 1xHPLN250W | 6800 |
| MRX051 1xHPITP250W | 1xHPIT250W | 6900 |

Street light luminaire with POT optics reflector and heat resistant toughened glass cover.



Street Light - SRP 051

| Type | For lamp | LP (Rs.) |
|------------------|------------|----------|
| SRP051 1xSON150W | 1xSONT150W | 8300 |
| SRP051 1xSON250W | 1xSONT250W | 8820 |

Street light luminaire with single piece die cast aluminium housing, POT optics reflector and UV stabilized acrylic cover.



Caleste - SGP 301

| Type | For lamp | LP (Rs.) |
|-----------------------|--------------|----------|
| SGP301 1xSON70W FG | 1xSONT70W(E) | 4550 |
| SGP301 1xCDMTT 70W FG | 1xCDMTT70W | 4550 |
| SGP301 1xSON-I-70W FG | 1xSONT70W(I) | 4400 |
| SGP301 1xSON70W PC | 1xSONT70W(E) | 4600 |
| SGP301 1xCDMTT 70W PC | 1xCDMTT 70W | 4500 |
| SGP301 1xSON-I-70W PC | 1xSONT70W(I) | 4450 |

Low wattage street light luminaire with pressure die cast aluminium housing having POT optics, IP65 ingress protection and built-in tilt of 5°.

Outdoor Luminaires

Street Lighting Luminaires



Caleste - SGP 301

| Type | For lamp | LP (Rs.) |
|---------------------|-----------|----------|
| SGP301 1xCPOT60W FG | 1xCPOT60W | 18150 |


Low wattage street light luminaire with pressure die cast aluminium housing having POT optics, IP65 ingress protection. Suitable for cosmopolis lamp & electronic ballast.



Caleste - SGP 301

| Type | For lamp | LP (Rs.) |
|-----------------------|---------------|------------|
| SGP301 1xSON70W GB | 1xSONT70W (E) | on request |
| SGP301 1xSON-I-70W GB | 1xSONT70W (I) | on request |
| SGP301 1xCDMTT70W GB | 1xCDMTT70W | on request |

Low wattage street light luminaire with pressure die cast aluminium housing having bowl glass and POT optics and ingress protection of IP 66.



Broadway I I I CRP 320

| Type | For lamp | LP (Rs.) |
|-------------------------|------------|----------|
| CRP320 1xSONT70W GR | 1xSONT70W | 5350 |
| CRP320 1xCDMTT70W FG GR | 1xCDMTT70W | 5350 |

Street light luminaire with aesthetically designed die cast aluminium housing, POT optics reflector and toughened flat glass (IP 65). Colour options (prices on request)



Esplanade SGP 401

| Type | For lamp | LP (Rs.) |
|---------------------|-------------|----------|
| SGP401 1xSONT-150W | 1xSONT-150W | 6400 |
| SGP401 1xCDMTT-150W | 1xCDMTT150W | 6700 |
| SGP401 1xSONT250W | 1xSONT250W | 6750 |
| SGP401 1xCDMTT250W | 1xCDMTT250W | 7000 |
| SGP 401 1xHPIT 250W | 1xHPIT 250W | 6950 |

Street light luminaire with high pressure die cast aluminium housing, POT optics reflector and toughened flat glass offering ingress protection. Suitable for use with high pressure sodium vapour, metal halide, ceramic metal halide lamps.

SGP401 in dimming version 250-150W and 150-70W - On Request

Outdoor Luminaires

Street Lighting Luminaires



Secura -
SGP 438

| Type | For lamp | LP (Rs.) |
|--------------------|---------------------|----------|
| SGP438 1xSONT150W | 1xSONT150W | 7500 |
| SGP438 1xCDMTT150W | 1xCDMTT150W HPIT | 7600 |
| SGP438 1xSONT250W | 1xSONT250W | 7800 |
| SGP438 1xCDMTT250W | 1xCDMTT250W HPIT | 7900 |

Street light luminaire aerodynamically shaped single piece pressure die cast aluminium housing, toughened glass cover, efficient POT optics, ingress protection, and special PUL coating for improved aesthetics.

SGP438 in dimming version 250-150W and 150-70W - On Request



Skyline -
SGP 325

| Type | For lamp | LP (Rs.) |
|----------------------|------------|----------|
| SGP325 1xSONT150W FG | 1xSONT150W | 9030 |
| SGP325 1xSONT250W FG | 1xSONT250W | 9500 |
| SGP325 1xHPIT250W FG | 1xHPIT250W | 9150 |

Street light luminaire with pressure die cast aluminium housing, POT optics reflector and heat resistant toughened flat glass cover (IP 65).



Skyline -
SGP 325

| Type | For lamp | LP (Rs.) |
|----------------------|------------|----------|
| SGP325 1xSONT150W PC | 1xSONT150W | 9600 |
| SGP325 1xSONT250W PC | 1xSONT250W | 9900 |
| SGP325 1xHPIT250W PC | 1xHPIT250W | 9700 |

Street light luminaire with pressure die cast aluminium housing, POT optics reflector and polycarbonate cover (IP 65)




Broadway-Plus
CRP 330

| Type | For lamp | LP (Rs.) |
|-------------------------------|-----------|----------|
| CRP330 CPOT140W EB I OC FG GR | 1xCPO140W | 25850 |
| CRP330 CPOT60W EB I OC FG GR | 1xCPOT60W | 25300 |

Street light luminaire with aesthetically designed die cast aluminium housing, COSMO optics reflector, toughened flat glass (IP 65), and electronic ballast.

Outdoor Luminaires

Street Lighting Luminaires



Broadway-Plus
CRP 330

| Type | For lamp | LP (Rs.) |
|----------------------|-------------|----------|
| CRP330 1xSONT-150WTP | 1xSONT-150W | 10100 |
| CRP330 1xSONT-250WTP | 1xSONT-250W | 10450 |

Street light luminaire with aesthetically designed die cast aluminium housing, POT optics reflector and toughened flat glass (IP 65). Colour options (on request)



Smartway Plus
SPP 335

| Type | For lamp | LP (Rs.) |
|-----------------------|-------------|----------|
| SPP335 1xSONT-150W GB | 1xSONT-150W | 11750 |
| SPP335 1xSONT-250W GB | 1xSONT-250W | 12200 |
| SPP335 1xHPIT-250W GB | 1xHPIT-250W | 11900 |

Pressure die cast top opening Street light luminaire suitable for SON-T-150W-250W lamps. Pot optics with toughened glass bowl (IP66). Available in Curved glass and side pole entry mounting.



Velocity -
SGP338/
MGP338 GB

| Type | LP (Rs.) |
|------------------------|----------|
| SGP338 M 1xSONT250W GB | 17200 |
| SGP338 M 1xSONT400W GB | 17800 |
| MGP338 M 1xHPIT250W GB | 16900 |
| MGP338 M 1xHPIT400W GB | 17200 |

Road lighting luminaire for tubular high-pressure sodium lamps up to 400W. Step dimming option available up to SON-T 250W lamp version. (prices on request).




Velocity -
SGP338 FG

| Type | LP (Rs.) |
|----------------------|----------|
| SGP338 1xSONT250W FG | 15300 |
| SGP338 1xHPIT250W FG | 15100 |
| SGP338 1xSONT400W FG | 15900 |
| SGP338 1xHPIT400W FG | 15400 |

Road light luminaire for tubular high-pressure sodium lamps up to 400W. Step dimming option available up to SON-T 250W lamp version.


Outdoor Luminaires

Street Lighting Luminaires




Selenium
SGP 340

| Type | For lamp | LP (Rs.) |
|--|-----------------|------------|
| SGP340 | See description | On Request |
| Street light luminaire suitable for cosmopolis 140W & 60W and SONT-150W-400W lamps with IP rating of IP66, having choice of flat glass or PC bowl and mounting options from side and bottom. | | |




Modena
SGP 682

| Type | For lamp | LP (Rs.) |
|---|-----------------|------------|
| SGP682 | See description | On Request |
| Street light luminaire suitable for SONT 150-400W lamps with IP rating of IP66. Choice of Glass bowl & Flat glass and mounting option of side and bottom. | | |




Aurora
SPP 202

| Type | For lamp | LP (Rs.) |
|---|-----------------|------------|
| SPP202 | See description | On Request |
| Aesthetically designed, pressure die cast Street light luminaire suitable for SONT-70W to 250W lamps and IP rating of IP65 with curved glass. | | |



Iridium
SGS 453/454

| Type | For lamp | LP (Rs.) |
|--|-----------------|------------|
| SGS454/SGS453 | See description | On Request |
| Street light luminaire suitable for cosmopolis 140W & 60W and SONT lamps 150W-400W with IP rating of IP66. Choice of flat glass and glass bowl and mounting option of side and bottom. | | |



CitySoul
CGP 431

| Type | For lamp | LP (Rs.) |
|--|-----------------|------------|
| CGP431 | See description | On Request |
| Urban Street light luminaire suitable for cosmopolis 140W & 60W and SONT70W, 150W & 250W lamps with IP rating of IP66 having choice of flat or curved glass and mounting options from side and bottom. | | |



Outdoor Luminaires

City Beautification Luminaires



Smart LED Post-top

| Type | LP (Rs.) |
|-------------------------------------|----------|
| BGP150 LED1000/WW PSU 220-240V 7043 | 55000 |
| BGP150 LED1000/NW PSU 220-240V 7043 | 55000 |
| BGP150 LED2000/WW PSU 220-240V 7043 | 60000 |
| BGP150 LED2000/NW PSU 220-240V 7043 | 60000 |

Philips stylish, robust and reliable post top lantern using LED as light source with good light distribution, limited upward light component avoiding light pollution yet affordable.



Smart LED Wall mount

| Type | LP (Rs.) |
|------------------------------------|----------|
| BWS150 LED200/WW PSU 220-240V 7043 | 15000 |
| BWS150 LED200/NW PSU 220-240V 7043 | 15000 |

Philips LED wall mount offers a high level of durability with high impact resistant, and ingress protection with comfortable soft lighting.



Smart LED Bollard II

| Type | LP (Rs.) |
|------------------------------------|----------|
| BCP150 LED150/WW PSU 220-240V 7043 | 16500 |
| BCP150 LED150/NW PSU 220-240V 7043 | 16500 |
| BCP151 LED150/WW PSU 220-240V 7043 | 18000 |
| BCP151 LED150/NW PSU 220-240V 7043 | 18000 |

Philips LED Bollard offers a high level of durability with high impact resistant, ingress protection with easy of installation and comfortable soft lighting.



Smart LED Marker

| Type | LP (Rs.) |
|-----------------------------------|----------|
| BBG150 LED50/WW PSU 220-240V IP67 | 9000 |
| BBG150 LED50/NW PSU 220-240V IP67 | 9000 |
| BBG151 LED150/WW PSU 220-240V | 9000 |
| BBG151 LED150/NW PSU 220-240V | 9000 |

Philips LED marker offers a high level of durability with high impact resistant, easy to install and ingress protection, come equipped with suitable mounting box.

Outdoor Luminaires

City Beautification Luminaires



Smart LED wall bracket

| Type | LP (Rs.) |
|-------------------------------|----------|
| BWS160 LED150/NW PSU100-240V | 10000 |
| BWS160 LED150/WW PSU100-240V | 10000 |
| BWS160 LED150/WW PSU100-240V | 10000 |
| BWS161 LED300/NW PSU 100-240V | 14000 |
| BWS161 LED300/WW PSU100-240V | 14000 |
| BWS161 LED300/WW PSU100-240V | 14000 |

Philips LED wall bracket light offers a simple, compact design but offer flexible beam angle with high impact resistant, easy to install and ingress protection, comes equipped with suitable mounting box which suits to a wide range of architectural styles.



Smart LED Spot

| Type | LP (Rs.) |
|----------------|----------|
| BGP310 WW / NW | 7500 |

Philips LED SPOT offers accent lighting with easy to install and high ingress protection, comes equipped with suitable mounting options. Also available in 12, 24, 36D and WW/Amber color (price on request).



Smart LED Spot

| Type | LP (Rs.) |
|---------------|----------|
| BGP311 WW/ NW | 7500 |

Philips LED SPOT offers accent lighting with easy to install and high ingress protection, comes equipped with suitable mounting options. Also available in 12, 24, 36D and WW/Amber color (price on request).



Smart LED Spot SPIKE

| Type | LP (Rs.) |
|------------------|----------|
| ZGP311 SPK | 300 |
| SPIKE For BGP301 | |

Outdoor Luminaires

City Beautification Luminaires




| Type | LP (Rs.) |
|---|----------|
| BBP330 WW / NW | 18000 |
| Philips LED UPLITE offers accent lighting with easy to install and high ingress protection, comes equipped with suitable mounting box. Also available in 12, 24, 36D Amber and green color (prices on request). | |



| Type | LP (Rs.) |
|--|----------|
| BWG150 LED50/WW PSU 220-240V IP67 7043 | 11000 |
| BWG150 LED50/NW PSU 220-240V IP67 7043 | 11000 |
| Philips LED step light offers uniform asymmetric lighting with easy to install and high ingress protection, comes equipped with suitable mounting box. | |

Outdoor Luminaires

City Beautification Luminaires

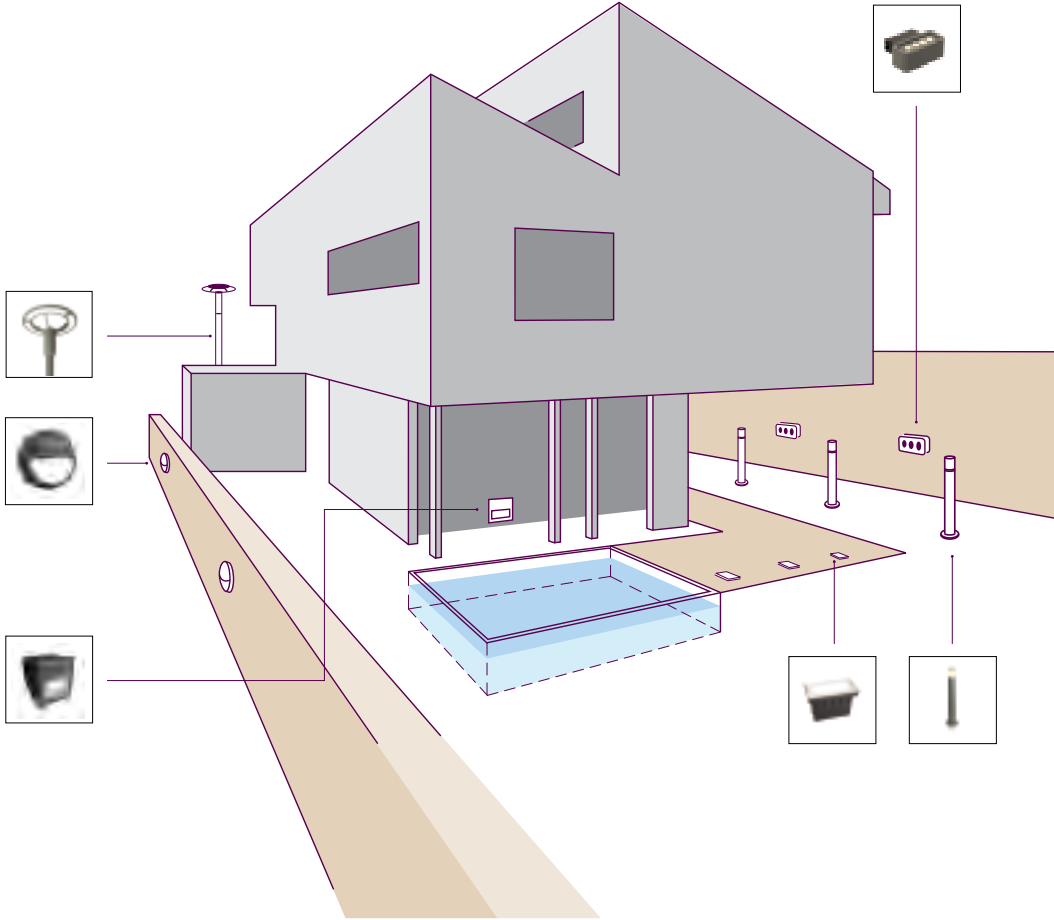

Outdoor Luminaires

City Beautification Luminaires



SPC101
HPC 101

| Type | For lamp | LP (Rs.) |
|----------------------|---------------|----------|
| SPC101 1xSON70W E | 1xSON 70W (E) | 5000 |
| SPC101 1xSON-I-70W E | 1xSON 70W (I) | 4850 |
| HPC101 1xHPLN-125W E | 1xHPLN-125W | 4600 |

Post top lantern with conical cover.



SPC 102
HPC 102

| Type | For lamp | LP (Rs.) |
|----------------------|--------------|----------|
| SPC102 1xSON70W E | 1xSON70W (E) | 5000 |
| SPC102 1xSON-I-70W E | 1xSON70W (I) | 4850 |
| HPC102 1xHPLN-125W E | 1xHPLN-125W | 4600 |

Post top lantern with elliptical cover.



SPC 104
HPC 104

| Type | For lamp | LP (Rs.) |
|----------------------|--------------|----------|
| SPC104 1xSON70W E | 1xSON70W (E) | 5000 |
| SPC104 1xSON-I-70W E | 1xSON70W (I) | 4850 |
| HPC104 1xHPLN-125W E | 1xHPLN-125W | 4600 |

Post top lantern with ribbed conical cover.



SPC 106
HPC 106

| Type | For lamp | LP (Rs.) |
|----------------------|---------------|----------|
| SPC106 1xSON70W E | 1xSON 70W (E) | 5000 |
| SPC106 1xSON-I-70W E | 1xSON 70W (I) | 4850 |
| HPC106 1xHPLN-125W E | 1xHPLN-125W | 4600 |

Post top lantern with spherical cover.




Ice Cube
HPS 110

| Type | For lamp | LP (Rs.) |
|-----------------------|--------------|----------|
| HPS110 1xSON70W IC | 1xSON70W (E) | 5000 |
| HPS110 1xSON-I-70W IC | 1xSON70W (I) | 4850 |
| HPS110 1xHPLN-125W IC | 1xHPLN-125W | 4600 |
| HPS110 1xCDMET70W IC | 1xCDMET70W | 5100 |
| HPS110 1xMHNSE70W IC | 1xMHNSE70W | 5100 |

Post top lantern with cover - Icecube

Outdoor Luminaires


City Beautification Luminaires



Twister
HPS 111

| Type | For lamp | LP (Rs.) |
|-----------------------|--------------|----------|
| HPS111 1xSON70W IC | 1xSON70W (E) | 5000 |
| HPS111 1xSON-I-70W IC | 1xSON70W (I) | 4850 |
| HPS111 1xHPLN-125W IC | 1xHPLN-125W | 4600 |
| HPS111 1xCDMET70W IC | 1xCDMET70W | 5100 |
| HPS111 1xMHNSE70W IC | 1xMHNSE70W | 5100 |


Post top lantern with cover - Twister



Amorphous
HPS 112

| Type | For lamp | LP (Rs.) |
|-----------------------|--------------|----------|
| HPS112 1xSON70W IC | 1xSON70W (E) | 5000 |
| HPS112 1xSON-I-70W IC | 1xSON70W (I) | 4850 |
| HPS112 1xHPLN-125W IC | 1xHPLN-125W | 4600 |
| HPS112 1xCDMET70W IC | 1xCDMET70W | 5100 |
| HPS112 1xMHNSE70W IC | 1xMHNSE70W | 5100 |


Post top lantern with cover - Amorphous



Bollard

| Type | For lamp | LP (Rs.) |
|------------------|----------|----------|
| NGC100 1xA60-60W | 1xGLS60W | 5240 |
| FGC100 1xPLS9W | 1xPLS9W | 5570 |

Elegantly styled bollards suitable for use with GLS, PL-S, PL-C or SL lamp.




Mini Bollard

| Type | For lamp | LP (Rs.) |
|---------------------|-----------|----------|
| FGC201 2xPLS/2P9W | 2xPLS9W | 4300 |
| FGC202 1xPL-C/2P18W | 1xPL-C18W | 4300 |
| FGC203 1xPLET18W | 1xSL18W | 3850 |
| NGC200 1xA60-60W | 1xGLS60W | 4400 |

Elegantly styled mini bollards suitable for use with GLS, PL-S, PL-C or SL lamp.

Outdoor Luminaires

City Beautification Luminaires



Mini Deco Flood

| Type | For lamp | LP (Rs.) |
|-------------------|-----------------------------------|----------|
| DGP 651 1xHALR50W | 1x12V, 50W DICHROIC HALOGEN | 4200 |


Miniature integral floodlight luminaire with pressure die cast aluminium housing (IP 65).



Mini Deco Flood

| Type | For lamp | LP (Rs.) |
|-------------------|-----------------------------------|----------|
| DGP652 1xHALR50W* | 1x12V, 50W DICHROIC HALOGEN | 3000 |

(*Price is excluding transformer box)
Miniature non integral floodlight luminaire with pressure die cast aluminium housing.



ZGP662

| Type | For lamp | LP (Rs.) |
|----------------|----------|----------|
| ZGP662 SPIKE** | | 800 |

Spike for mini deco flood luminaire.
(** Optional accessory to be used with 1 no. of separate DGP 652/653. Price is exclusive of luminaire. Photograph shows accessory with luminaire.)



ZGP663

| Type | For lamp | LP (Rs.) |
|------------|-----------------------------------|----------|
| ZGP663 TPS | 4x12V, 50W DICHROIC HALOGEN | 6090 |

Transformer box
*4 nos. of non integral luminaires to be used with 1 no. transformer box. Price is exclusive of luminaire.
Transformer box for non integral mini deco flood luminaire.



ZGP 665

| Type | LP (Rs.) |
|----------------|----------|
| ZGP665 SPIKE** | 950 |

Spike for mini deco flood luminaire.
**Optional accessory to be used with 1 no. of separate DGP 651
Price is exclusive of luminaire.
Photograph shows accessory with luminaire.)

Outdoor Luminaires

City Beautification Luminaires



Sonara Pole mount

| Type | For lamp | LP (Rs.) |
|------------------------|--------------|----------|
| HPS360 1xMHNTD70W GR | 1xMHNTD70W | 9000 |
| HPS360 1xCDMTT-150W GR | 1xCDMTT150W | 9600 |
| HPS360 1xHPLN-125W GR | 1xHPLN-125W | 8550 |
| HPS360 1xSON70W GR | 1xSON70W (E) | 8900 |
| HPS360 1xCDMTD70W GR | 1xCDMTD 70W | 9100 |

Post Top decorative luminaire in textured grey
Also available GN: sunflower green colours on request.
Add Rs.150 in LP for color version.



Sonara Bollard

| Type | For lamp | LP (Rs.) |
|------------------------|-----------|----------|
| HCS 360 1xPLC/2P18W GR | 1xPL-C18W | 5700 |

Bollard decorative luminaire in textured grey
Also available GN: sunflower green colours on request.
Add Rs.150 in LP for color version.



Sonara Wall mount

| Type | For lamp | LP (Rs.) |
|-----------------------|-----------|----------|
| HWS360 1xPLC/2P18W GR | 1xPL-C18W | 3150 |

Wall mount decorative luminaire in textured grey
Also available GN: sunflower green colours on request.
Add Rs.150 in LP for color version.




Lumos Pole Mount

| Type | For lamp | LP (Rs.) |
|------------------------|--------------|----------|
| HPS370 1xCDMTT-150W GR | 1xCDM-TT150W | 11400 |
| HPS370 1xHPLN-125W GR | 1xHPLN-125W | 10500 |
| HPS370 1xSON70W GR | 1xSON70W (E) | 10700 |

Post Top decorative luminaire in textured grey
Also available GN: sunflower green colours on request.
Add Rs.150 in LP for color version.

Outdoor Luminaires

City Beautification Luminaires



Lumos
Bollard

| Type | For lamp | LP (Rs.) |
|----------------------|-------------|----------|
| HCS370 1xCDMTT70W GR | 1xCDM-TT70W | 9100 |
| HCS370 1xPL-L18W GR | 1xPL-L18W | 8600 |

Bollard decorative luminaire in textured grey
Also available GN: sunflower green colours on request.
Add Rs.150 in L.P. for color version.



Lumos
Wall Mount

| Type | For lamp | LP (Rs.) |
|-------------------------|-----------|----------|
| HWS370 1xPL-C/2P-18W GR | 1xPL-C18W | 2850 |

Wall Mount decorative luminaire in textured grey
Also available GN: sunflower green colours on request.
Add Rs.150 in L.P. for color version.



Metronomis
CDS 530

| Type | For lamp | LP (Rs.) |
|--------------------------------|-------------|----------|
| CDS530 SONT70C 240V 50Hz E | 1xSONT70W | 28800 |
| CDS530 CDMT-I50W C 240V 50Hz E | 1xCDMT-I50W | 29400 |

Decorative post top lantern (IP 65).
Suitable for use with High Pressure Sodium Vapour and CDM-T Metal Halide Lamp.
Price excluding pole.



Metronomis
CDS 570

| Type | For lamp | LP (Rs.) |
|--------------------------------|-------------|----------|
| CDS570 SONT70W C 240V 50Hz E | 1xSONT70W | 43200 |
| CDS570 CDMT-I50W C 240V 50Hz E | 1xCDMT-I50W | 45600 |

Decorative post top lantern (IP 65).
Suitable for use with High Pressure Sodium Vapour and CDMT metal halide lamp.
Price excluding pole.

Outdoor Luminaires


City Beautification Luminaires



Metronomis
CDS 580

| Type | For lamp | LP (Rs.) |
|--------------------------------|-------------|----------|
| CDS580 SONT70W C 240V 50Hz E | 1xSONT70W | 46800 |
| CDS580 CDMT-I50W C 240V 50Hz E | 1xCDMT-I50W | 49400 |

Decorative post top lantern (IP 65).
Suitable for use with High Pressure Sodium Vapour and CDM-T Metal Halide Lamp.
Price excluding pole.



Metronomis
CDS 560

| Type | For lamp | LP (Rs.) |
|--------------------------------|-------------|----------|
| CDS560 SONT70W C 240V 50Hz E | 1xSONT70W | 38400 |
| CDS560 CDMT-I50W C 240V 50Hz E | 1xCDMT-I50W | 42000 |

Decorative post top lantern (IP 65). Suitable for use with High Pressure Sodium Vapour and CDMT Metal Halide Lamp. Price excluding pole.



Metronomis
CDS 550

| Type | For lamp | LP (Rs.) |
|-------------------------------|-------------|----------|
| CDS550 SONT70W C 240V 50Hz E | 1xSONT70W | 44900 |
| CDS550 CDMT-I50W C240V 50Hz E | 1xCDMT-I50W | 46700 |

Decorative post top lantern (IP 65). Suitable for use with High Pressure Sodium Vapour and CDM-T Metal Halide Lamp. Price excluding pole.

Outdoor Luminaires


Flood Lighting Luminaires



Tempo LED - BVP410

| Type | LP (Rs.) |
|-----------------------------------|----------|
| BVP410 LED 70 CW HE NB SI PSU GR | 40000 |
| BVP410 LED 91 CW HE NB SI PSU GR | 55000 |
| BVP410 LED 137 CW HE NB SI PSU GR | 70000 |

Philips Flood lighting luminaire with high power LED and unique flood optics to ensure uniform distribution, and save up-to 50% w.r.t conventional system and maintenance free system, Ideal for area lighting high mast, billboard and sports lighting.



NHG 010

| Type | For lamp | LP (Rs.) |
|-----------------------|-------------------------|----------|
| NHG010 1xNR95-150W-FR | 1xReflector 75/100/150W | 7350 |

(Suitable upto 0.6 metre depth below water level). Underwater luminaire (IP 67).



Halolite NVC 502

| Type | For lamp | LP (Rs.) |
|-----------------------|----------------|----------|
| NVC502 1xHALTDL-1000W | 1xHalogen1000W | 2100 |
| MVC502 1xMHNTD-150W * | 1xMHNTD-150W | 6450 |

(*Including separate CG box)
Floodlight luminaire with Cast Aluminium Housing & toughened glass cover.



Halolite QVF 135

| Type | For lamp | LP (Rs.) |
|---------------------|--------------------|----------|
| QVF135 1xHALTDS500W | 1xHalogen 300/500W | 1150 |
| QVF135 /MHNTD70W* | 1xMHNTD70W | 4140 |

(* Including separate CG box)
Floodlight luminaire with Cast Aluminium Housing & toughened glass cover.



Halolite NG QVF 135

| Type | For lamp | LP (Rs.) |
|--------------------------------|-----------------|----------|
| QVF135 HALTDS500W K 240V GR IN | 1xHalogen 500W* | 1200 |

(*Supplied with lamp)
New Generation floodlight luminaire with high pressure die cast aluminium housing & patterned toughened front glass. Price inclusive of lamp.

Outdoor Luminaires

Flood Lighting Luminaires



Uniflood RVP 339

| Type | For lamp | LP (Rs.) |
|---------------------|------------------|----------|
| RVP339 1xCDMTD70W R | 1xMHNTD/CDMTD70W | 4250 |

Integral flood lighting luminaire, single piece pressure die cast aluminium housing, toughened glass cover; (IP 65) ingress protection and rectangular 'R' reflector for planar symmetric optical distribution.



Uniflood - RVP 339

| Type | For lamp | LP (Rs.) |
|----------------------|------------------|----------|
| RVP339 1xCDMTD70W PR | 1xMHNTD/CDMTD70W | 4250 |

Integral flood lighting luminaire, single piece pressure die cast aluminium housing, toughened glass cover; (IP 65) ingress protection and parabolic reflector 'PR' for rotationally symmetric optical distribution.



Con Tempo2 SWF 231

| Type | For lamp | LP (Rs.) |
|-----------------------|--------------|----------|
| SWF231 1xSONT-150W S | 1xSONT-150W | 6000 |
| SWF231 1xSONT-150W A | 1xSONT-150W | 6000 |
| MWF231 1xMHNTD-150W S | 1xMHNTD-150W | 6100 |
| MWF231 1xMHNTD-150W A | 1xMHNTD-150W | 6100 |

Integral floodlight luminaire with pressure die cast aluminium housing (IP 65).



Con Tempo3 SWF 331

| Type | For lamp | LP (Rs.) |
|---------------------|------------|----------|
| SWF331 1xSONT250W S | 1xSONT250W | 8300 |
| SWF331 1xSONT250W A | 1xSONT250W | 8300 |
| SWF331 1xSONT400W S | 1xSONT400W | 9300 |
| SWF331 1xSONT400W A | 1xSONT400W | 9300 |

Integral floodlight luminaire with pressure die cast aluminium housing.



Con Tempo3 MWF 331

| Type | For lamp | LP (Rs.) |
|----------------------|------------|----------|
| MWF331 1xHPITP250W S | 1xHPIT250W | 8250 |
| MWF331 1xHPITP250W A | 1xHPIT250W | 8250 |
| MWF331 1xHPITP400W S | 1xHPIT400W | 8650 |
| MWF331 1xHPITP400W A | 1xHPIT400W | 8650 |

Integral floodlight luminaire with pressure die cast aluminium housing (IP 65).

Outdoor Luminaires

Flood Lighting Luminaires



SNFI 14

| Type | For lamp | LP (Rs.) |
|-----------------------|------------|----------|
| SNFI 14 1xSONT250W NB | 1xSONT250W | 10250 |
| SNFI 14 1xSONT250W WB | 1xSONT250W | 10250 |
| SNFI 14 1xSONT400W NB | 1xSONT400W | 11430 |
| SNFI 14 1xSONT400W WB | 1xSONT400W | 11430 |
| SNFI 14 1xHPIT250W NB | 1xHPIT250W | 10300 |
| SNFI 14 1xHPIT250W WB | 1xHPIT250W | 10300 |
| SNFI 14 1xHPIT400W NB | 1xHPIT400W | 10700 |
| SNFI 14 1xHPIT400W WB | 1xHPIT400W | 10700 |

Non-integral flood light luminaire with pressure die cast aluminium housing and option of narrow (NB) and wide (WB) beam light distribution. Comprises of having (SNFI 14), and CG box (ZVX).



SLF 125
HLF 125

| Type | For lamp | LP (Rs.) |
|--------------------|--------------------|----------|
| SLF125 1xSONT250W* | 1xSON/ SONT250W | 11300 |
| SLF125 1xSONT400W* | 1xSON/ SONT400W | 12480 |
| HLF125 1xHPLN400W* | 1xHPLN400W | 11050 |

(* Including separate CG box)

Non integral floodlight luminaire complete with external CG Box.



Nocturne VI
RVP 302

| Type | For lamp | LP (Rs.) |
|--------------------|------------|----------|
| RVP302 2xSONT250W* | 2xSONT250W | 15150 |
| RVP302 2xSONT400W* | 2xSONT400W | 17400 |
| RVP302 2xHPIT250W* | 2xHPIT250W | 15050 |
| RVP302 2xHPIT400W* | 2xHPIT400W | 16100 |

(* Including separate single DD CG box)

Non integral floodlight luminaire with pressure die cast aluminium housing and heat resistant toughened flat glass (IP 65) complete with external single CG Box .

Outdoor Luminaires

Flood Lighting Luminaires



Nocturne V2
RVP 303

| Type | For lamp | LP (Rs.) |
|--------------------|------------|------------|
| RVP303 2xSONT250W* | 2xSONT250W | on request |
| RVP303 2xSONT400W* | 2xSONT400W | on request |
| RVP303 2xHPIT250W* | 2xHPIT250W | on request |
| RVP303 2xHPIT400W* | 2xHPIT400W | on request |

(* Including separate single DD CG box)

Non integral floodlight luminaire with pressure die cast aluminium housing and heat resistant toughened flat glass (IP 66) complete with external CG Box .



Radiance
RVP 501

| Type | For lamp | LP (Rs.) |
|---------------------------|--------------|----------|
| RVP501 M 2xMAX400W-E40* | 2xSONT400W | 31710 |
| RVP501 M 2xMAX400W-E40* | 2xHPIT400W | 30250 |
| RVP501 M 1xSON-1000W-E40* | 1xSONT-1000W | 36750 |
| RVP501 M 1xSON-1000W-E40* | 1xHPIT-1000W | 33600 |
| RVP501 1xMHNLA2000W 400V | 1xMHNLA2000W | 84150 |

(* Including separate Single DD CG Box)

Non integral asymmetric floodlight luminaire with die cast aluminium housing complete (IP 65) with external CG Box.

Outdoor Luminaires

Control Gear Box

104



ZVX 240

| Type | For lamp | LP (Rs.) |
|-------------------------|-----------|----------|
| ZVX240 1xHPLN80W 240V | 1xHPL80W | 2400 |
| ZVX250 1xHPLN-125W 240V | 1xHPL125W | 2450 |
| ZVX280 1xHPLN250W 240V | 1xHPL250W | 4150 |
| ZVX290 1xHPLN400W 240V | 1xHPL400W | 4450 |

Pressure die cast aluminium control gear boxes with open construction ballasts.



HPI-T
CG Boxes

| Type | For lamp | LP (Rs.) |
|-------------------------|------------|----------|
| ZVX300 1xHPIT250W 240V | 1xHPIT250W | 4750 |
| ZVX310 1xHPITP400W 240V | 1xHPIT400W | 5150 |

Pressure die cast aluminium control gear boxes with open construction ballasts.



SON
CG Boxes

| Type | For lamp | LP (Rs.) |
|-------------------------|--------------|----------|
| ZVX260 1xSON-I-70W 240V | 1xSON70W (I) | 2650 |
| ZVX270 1xSON70W 240V | 1xSON70W (E) | 3000 |
| ZVX320 1xSON-150W 240V | 1xSON-150W | 4350 |
| ZVX330 1xSON250W 240V | 1xSON250W | 4700 |
| ZVX340 1xSON400W 240V | 1xSON400W | 5880 |

Pressure die cast aluminium control gear boxes with open construction ballasts.



ZVX 400

| Type | For lamp | LP (Rs.) |
|--------------------------|--------------|----------|
| ZVX400 1xSON-1000W 240V | 1xSONT-1000W | 16800 |
| ZVX410 1xHPIT-1000W 220V | 1xHPIT-1000W | 13650 |

Die cast aluminium Control Gear box

Outdoor Luminaires

Control Gear Box

105



ZVX 400

| Type | For lamp | LP (Rs.) |
|--------------------|-------------|----------|
| ZVX321 2xSONT-150W | 2xSONT-150W | 7900 |
| ZVX331 2xSONT250W | 2xSONT250W | 8450 |
| ZVX331 2xHPIT250W | 2xHPIT250W | 8350 |
| ZVX331 2xHPLN250W | 2xHPLN250W | 7450 |
| ZVX341 2xSONT400W | 2xSONT400W | 10700 |
| ZVX341 2xHPIT400W | 2xHPIT400W | 9400 |
| ZVX341 2xHPLN400W | 2xHPLN400W | 8000 |

Deep drawn single control gear box with 2 nos open construction ballast

Outdoor Luminaires

Products to be upgraded*

106

| Type | LP (Rs.) |
|----------------------|----------|
| CPP725 1xSON70W(E) | 88800 |
| CPP735 1xCDMT70W | 98800 |
| DBP701 2xPL-C18W | 22750 |
| DCP721 1xCDMT70W | 23780 |
| DCP731 1xCDMT70W | 23125 |
| DCP711 2xPL-C/2P-18W | 8050 |
| DCP715 2xPL-C/2P-18W | 8050 |
| CPP715 1xSON70W | 27600 |





“Naya Raipur will be a green city. Street lighting is one of the most important things while planning any city. Philips LED street lights are providing better, more soothing white light & also have low operational costs as compared to conventional solutions. Combined with lighting control, we can now remotely control timers, control light dimming and can also get information about faults. We are very satisfied with Philips LED lighting and the way the team has executed this project.”

- Mr. Salil Shrivastava, Chief Engineer, Naya Raipur Development Authority

Products



GreenLine Xtra



AmpLight Controls



“We wanted to shift to LED lighting as it is environment friendly and provides energy savings. Philips LED street lights have enhanced the look and feel of areas around Rajsamand Lake. People are feeling safer with Philips LED lighting and are not afraid to visit the lake even during late night. Money saved as a result of energy savings provided by Philips LED street lights, can now be spent on other developmental activities in the area.”

- Mrs.Asha Paliwal, Chairperson, Municipal Council, Rajsamand

Products



GreenLine Duo



GreenLine



“High mast lighting we have done at important areas – focusing on junctions where there is lot of public movement. We are very happy with the lighting. Quality and service levels of Philips is very good and we will continue to work with Philips in future projects.”

- Dr. P.Ulaganathan, I.A.S, CEO – Haldia Development Authority

Product



ConTempo

Lamps


| | |
|----------------------|---------|
| HID Lamps | |
| Outdoor | 118-119 |
| Industry | 120-121 |
| Retail | 122-113 |
| Case Studies | 124-127 |
| LED Lamps | 130-133 |
| Case Studies | 134-139 |
| CFL Ni Lamps | 142-145 |
| Tubular Lamps | 148-151 |
| Case Studies | 152-153 |
| CFLi Lamps | 156-161 |

HID Lamps




HID Lamps

Outdoor



Powertone quartz metal halide lamp-Tubular

| Type | M.R.P(Rs.) |
|--|------------|
| Powertone MH-T 70W | 750 |
| Powertone MH-T 150W | 800 |
| <ul style="list-style-type: none"> • Good quality light • Energy efficient | |



High pressure sodium lamps-Tubular

| Type | M.R.P(Rs.) |
|---|------------|
| SON Lamps 70 W Tubular without | 380 |
| SON Lamps 150 W Tubular | 535 |
| SON Lamps 250 W Tubular | 580 |
| SON Lamps 400 W Tubular | 660 |
| SON-T 1000W E E40 | 4500 |
| SOX 35W BY22d | 1400 |
| <ul style="list-style-type: none"> • Reliable solution • Faster re-ignition | |



High pressure SON PIA

| Type | M.R.P(Rs.) |
|--|------------|
| SON-T PLUS 70W E E27.SLV/12 | 450 |
| SON-T PLUS 150W E E40.SLV/12 | 650 |
| SON-T PIA PLUS 250W E E40 1SL/12 | 700 |
| SON-T PIA PLUS 400W E E40 1SL/12 | 780 |
| <ul style="list-style-type: none"> • Long life • High lumen output, maintained over life | |


HID Lamps

Outdoor



High wattage metal halide lamps

| Type | M.R.P(Rs.) |
|---|------------|
| HPIT PLUS 250W LAMPS | 1000 |
| HPI-T-PLUS 400W METAL HAL LAMP | 1010 |
| HPI-T 1000W E40.1CT/4 | 6000 |
| HPI-T 2000W 220V E40 | 8250 |
| MASTER MHN-SA 2000W/956 | 17000 |
| <ul style="list-style-type: none"> • High safety and comfort level, maintained over life • Minimal maintenance cost | |



Ceramic discharge metal halide Outdoor

| Type | M.R.P(Rs.) |
|--|------------|
| MASTER CityWh CDO-TT Plus 70W/828 E27 | 1900 |
| MASTER CityWh CDO-TT Plus 250W/940 E40 | 2050 |
| MASTER CityWh CDO-TT Plus 150W/828 E40 | 2000v |
| <p>Ceramic metal halide lamp with clear tubular outer bulb shape, used in outdoor offering pleasant white light.</p> | |

HID Lamps

Industry



Low wattage quartz metal halide

| Type | M.R.P(Rs.) |
|--|------------|
| MH 70W /P E27 | 830 |
| MH 70W /640 E27 CL SLV/24 | 800 |
| MH 150W /640 E27 CL SLV/24 | 900 |
| <ul style="list-style-type: none"> • Good colour rendering • High efficiency | |



High wattage quartz metal halide

| Type | M.R.P(Rs.) |
|---|------------|
| HPI PLUS 250W BU E40.SLV/12 | 1230 |
| HPI PLUS 400W BU E40.SLV/6 | 1300 |
| <ul style="list-style-type: none"> • Good lumen maintenance • Long life | |



White Light

Ceramic discharge metal halide Indoor

| Type | M.R.P(Rs.) |
|---|------------|
| MASTER CityWh CDO-ET Plus 70W/828 E27 | 1900 |
| MASTER CityWh CDO-ET Plus 150W/828 E40 | 2000 |
| Ceramic metal halide lamp with clear tubular outer bulb shape, used in outdoor offering pleasant white light. | |



White Light

Powertone quartz metal halide lamp-Elliptical

| Type | M.R.P(Rs.) |
|--|------------|
| Powertone MH 70W | 750 |
| Powertone MH 150W | 800 |
| <ul style="list-style-type: none"> • Good quality light • Energy efficient | |

HID Lamps

Industry



Low wattage mercury lamps

| Type | M.R.P(Rs.) |
|-----------------------------|------------|
| MLL-N 160WBC | 240 |
| BLENDED 160W LAMP SCREW CAP | 245 |
| MERCURY 80W BAYONET CAP | 182 |
| MERCURY 80W SCREW CAP | 188 |
| MERCURY 125W BAYONET CAP | 190 |
| MERCURY 125W SCREW CAP | 194 |
| Mixed light lamps | |



High wattage mercury lamps

| Type | M.R.P(Rs.) |
|-------------------------------------|------------|
| HPL-N 1000W | 2720 |
| MERCURY 400W SCREW CAP | 585 |
| MERCURY 250W SCREW CAP | 455 |
| Standard High Pressure Mercury lamp | |



High pressure sodium lamps-Elliptical

| Type | M.R.P(Rs.) |
|--|------------|
| SON Lamps 70 W without Ignitor | 375 |
| SON Lamps 70 W with Ignitor | 385 |
| SON Lamps 150 W Elliptical | 500 |
| SON Lamps 250 W Elliptical | 535 |
| SON Lamps 400 W Elliptical | 650 |
| High Pressure Sodium lamp with opalized ovoid outer bulb | |

HID Lamps

Retail



CDM-Elite lamp

| Type | M.R.P(Rs.) |
|--|------------|
| MASTERC CDM-T Elite 50W/930 G12 ICT/12 | 1350 |
| MASTERC CDM-T Elite 35W/930 G12 ICT/12 | 1350 |
| MASTERC CDM-T Elite 70W/930 G12 ICT/12 | 1350 |
| MASTERC CDM-TC Elite 35W/930 G8.5 ICT/12 | 1350 |
| MASTERC CDM-TC Elite 70W/930 G8.5 ICT/12 | 1350 |
| MASTERC CDM-TC Elite 50W/930 G8.5 ICT/12 | 1350 |

- Crisp white light
- CRI > 90



High wattage quartz metal halide lamp CDM-T

| Type | M.R.P(Rs.) |
|-----------------------------------|------------|
| MASTERC CDM-T 35W/830 G12 ICT/12 | 1125 |
| MASTERC CDM-T 35W/942 G12 ICT/12 | 1125 |
| MASTERC CDM-T 70W/830 G12 ICT/12 | 1125 |
| MASTERC CDM-T 70W/942 G12 ICT/12 | 1125 |
| MASTERC CDM-T 150W/830 G12 ICT/12 | 1250 |
| MASTERC CDM-T 150W/942 G12 ICT/12 | 1250 |

- Stable colour impression over lifetime
- High lamp efficacy results in low operating costs and low heat generation



Ceramic discharge metal halide lamp CDM-TC

| Type | M.R.P(Rs.) |
|------------------------------------|------------|
| MASTERC CDM-TC 35W/830 G8.5 ICT/12 | 1200 |
| MASTERC CDM-TC 35W/942 G8.5 ICT/12 | 1200 |
| MASTERC CDM-TC 70W/830 G8.5 ICT/12 | 1200 |
| MASTERC CDM-TC 70W/942 G8.5 ICT/12 | 1200 |

- Long lamp life
- UV-Block quartz outer bulb for reduced fading risks



Powertone MH G12

| Type | M.R.P(Rs.) |
|----------------|------------|
| MH 70W/730 G12 | 860 |
| MH 70W/742 G12 | 860 |
| MH 70W/765 G12 | 860 |

Quartz Metal Halide G12 is an economic solution for retail spaces. It offers good quality white light at 3000K, 4200K and 6000K with good color rendering. It makes the retail spaces enticing and inviting which enhances the ambience in the stores.

NOTE: MRP indicated for each product is for single unit only

HID Lamps

Retail



Ceramic discharge metal halide lamp CDM-R

| Type | M.R.P(Rs.) |
|--|------------|
| MASTERC CDM-R 70W/830 E27 PAR30L 10D ICT | 1900 |
| MASTERC CDM-R 70W/830 E27 PAR30L 40D ICT | 1900 |
| MASTERC CDM-R 70W/830 E27 PAR30L 30D ICT | 1900 |
| MASTERC CDM-R 35W/830 E27 PAR30L 30D ICT | 1900 |

- Low operating costs and low heat generation
- Long lamp life



Ceramic discharge metal halide lamp CDM-Rm mini

| Type | M.R.P(Rs.) |
|------------------------------------|------------|
| CDM-Rm Mini 20W/830 GX10 MRI 6 25D | 2000 |
| CDM-Rm Mini 20W/830 GX10 MRI 6 10D | 2000 |
| CDM-Rm Mini 20W/830 GX10 MRI 6 40D | 2000 |


- High lamp efficacy results in low operating costs and low heat generation
- Long lamp life compared with incandescent and halogen lamps
- Stable colour impression over lifetime



Ceramic discharge metal halide lamp CDM-RI I I

| Type | M.R.P(Rs.) |
|--|------------|
| MASTERC CDM-RI I I 35W/830 GX8.5 10D ICT/6 | 2050 |
| MASTERC CDM-RI I I 35W/830 GX8.5 40D ICT/6 | 2050 |
| MASTERC CDM-RI I I 70W/830 GX8.5 24D ICT/6 | 2050 |
| MASTERC CDM-RI I I 35W/830 GX8.5 24D ICT/6 | 2050 |

- Low operating costs
- Easy installation



Double ended metal halide lamp

| Type | M.R.P(Rs.) |
|-----------------------------|------------|
| MHN-TD DE Metal Halide 70W | 550 |
| MHN-TD DE Metal Halide 150W | 550 |

- Good colour rendering
- High efficiency

India Gate

New Delhi, India



"I must say that a lot of thought has gone into designing the lighting architecture at India gate. The lighting now is brighter, lighter and whiter. It is evenly disbursed, soothing and is not glaring which gives a happy look. I compliment Philips lighting team for this wonderful job."

- Dr. Sudhir Krishna, I.A.S
Secretary - Ministry of Urban Development, Govt. of India

Products



CDM lamp



ColorBlast



Case Study

MEXX

MEXX

Haarlem,
The Netherlands



“The new lighting is great for customers because it highlights the new collection so effectively.”

- Mr. Famke Roeterdink, Branch Manager, MEXX Haarlem

Product



CDM Elite lamp



LED Lamps



LED Lamps



GU10
Non-dimmable

| Type | M.R.P(Rs.) |
|-------------------------------------|------------|
| Master LED 7-50W IND GU10 2700K 25D | 1075 |
| Master LED 7-50W IND GU10 2700K 40D | 1075 |
| Master LED 7-50W IND GU10 4000K 25D | 1075 |
| Master LED 7-50W IND GU10 4000K 40D | 1075 |
| Master LED 7-50W IND GU10 5600K 25D | 1075 |
| Master LED 7-50W IND GU10 5600K 40D | 1075 |



GU10
Dimmable

| Type | M.R.P(Rs.) |
|--------------------------------------|------------|
| MASTER LED 8-50W+ GU10 2700K 25D KoD | 1690 |
| MASTER LED 8-50W+ GU10 2700K 40D KoD | 1690 |
| MASTER LED 8-50W+ GU10 3000K 25D KoD | 1690 |
| MASTER LED 8-50W+ GU10 3000K 40D KoD | 1690 |
| MASTER LED 8-50W+ GU10 4000K 25D KoD | 1690 |
| MASTER LED 8-50W+ GU10 4000K 40D KoD | 1690 |



MR11
Non-dimmable

| Type | M.R.P(Rs.) |
|-------------------------------------|------------|
| MASTER LED 4-20W 2700K 12V MR11 24D | 1099 |
| MASTER LED 4-20W 4000K 12V MR11 24D | 1099 |



MR16
Non-dimmable

| Type | M.R.P(Rs.) |
|-------------------------------------|------------|
| MASTER LED 4-20W 2700K 12V MR16 24D | 975 |
| MASTER LED 4-20W 3000K 12V MR16 24D | 975 |



MR16
Non-dimmable

| Type | M.R.P(Rs.) |
|---------------------------------------|------------|
| MASTER LED 6.5-50W 2700K MR16 24D IND | 1325 |
| MASTER LED 6.5-50W 3000K MR16 24D IND | 1325 |
| MASTER LED 6.5-50W 2700K MR16 36D IND | 1325 |
| MASTER LED 6.5-50W 3000K MR16 36D IND | 1325 |

LED Lamps



MR16
Dimmable

| Type | M.R.P(Rs.) |
|--|------------|
| MASTER LED 10-50W 2700K MR16 24D Dim IND | 1679 |
| MASTER LED 10-50W 3000K MR16 24D Dim IND | 1679 |
| MASTER LED 10-50W 4000K MR16 24D Dim IND | 1679 |
| MASTER LED 10-50W 2700K MR16 36D Dim IND | 1679 |
| MASTER LED 10-50W 3000K MR16 36D Dim IND | 1679 |
| MASTER LED 10-50W 4000K MR16 36D Dim IND | 1679 |



MR16
Dimmable

| Type | M.R.P(Rs.) |
|--|------------|
| MASTER LED 10-50W 2700K MR16 60D Dim IND | 1679 |
| MASTER LED 10-50W 3000K MR16 60D Dim IND | 1679 |
| MASTER LED 10-50W 4000K MR16 60D Dim IND | 1679 |



PAR20
Dimmable

| Type | M.R.P(Rs.) |
|--------------------------------------|------------|
| MASTER LED 7-50W Par20 25D 2700K Dim | 1399 |



PAR30S
Dimmable

| Type | M.R.P(Rs.) |
|---|------------|
| MASTER LED 12-75W 2700K 230V PAR30S 25D Dim | 2599 |



PAR38
Dimmable

| Type | M.R.P(Rs.) |
|---|------------|
| MASTER LED 18-100W 2700K 230V PAR38 25D Dim | 2990 |
| MASTER LED 18-100W 4000K 230V PAR38 25D Dim | 2990 |



PAR38
Outdoor

| Type | M.R.P(Rs.) |
|---|------------|
| MASTER LEDspotMV 17-100W 2700K 25D PAR38 OD | 3399 |

LED Lamps



AR111
Non-dimmable

| Type | M.R.P(Rs.) |
|---------------------------------------|------------|
| MASTER LED 15-75W 2700K 12V AR111 24D | 2999 |
| MASTER LED 15-75W 2700K 12V AR111 40D | 2999 |



AR111
Dimmable

| Type | M.R.P(Rs.) |
|---|------------|
| MASTER LED 15-75W 2700K 12V AR111 24D Dim | 3499 |
| MASTER LED 15-75W 2700K 12V AR111 40D Dim | 3499 |



LED bulb
Non-dimmable

| Type | M.R.P(Rs.) |
|-------------------------------|------------|
| myVision 4W B22 6500K A60 IND | 449 |
| myVision 4W E27 6500K A60 IND | 449 |
| myVision 5W B22 2700K A60 IND | 469 |
| myVision 5W E27 2700K A60 IND | 469 |
| myVision 7W B22 6500K A60 IND | 599 |
| myVision 7W E27 6500K A60 IND | 599 |



LED bulb
Dimmable

| Type | M.R.P(Rs.) |
|---|------------|
| MASTER LED 8-40W B22 2700K 230V A60 Dim | 2100 |
| MASTER LED 8-40W E27 2700K 230V A60 Dim | 2100 |



LED bulb
Dimmable

| Type | M.R.P(Rs.) |
|--|------------|
| MASTER LED 12-60W E27 2700K 230V A60 Dim | 3099 |
| MASTER LED 13-75W E27 2700K 230V A67 Dim | On request |
| MASTER LED 13-75W B22 2700K 230V A67 Dim | On request |

LED Lamps



Candle

| Type | M.R.P(Rs.) |
|---------------------------------------|------------|
| Novalier 4W E14 2700K 230V B35 CL DIM | 1349 |



LEDtube 2ft

| Type | M.R.P(Rs.) |
|--------------------------------------|------------|
| MSTRTLED INT STD 600mm 10W840T8 AP I | 1890 |
| MSTRTLED INT STD 600mm 10W865T8 AP I | 1890 |



LEDtube 4ft

| Type | M.R.P(Rs.) |
|---------------------------------------|------------|
| MSTRTLED INT STD 1200mm 19W840T8 AP I | 2949 |
| MSTRTLED INT STD 1200mm 19W865T8 AP I | 2949 |



TLED Essential

| Type | M.R.P(Rs.) |
|--|------------|
| ESSENTIAL LEDtube 1200 mm 20W840T8 IND I | 2050 |
| ESSENTIAL LEDtube 1200 mm 20W865T8 IND I | 2050 |
| ESSENTIAL LEDtube 600 mm 10W840T8 IND I | 1350 |
| ESSENTIAL LEDtube 600 mm 10W865T8 IND I | 1350 |

Case Study



McDonald's
New Delhi, India



“We wanted a lighting solution which looks aesthetically good and is also energy efficient. We are happy that we chose Philips LED lighting solutions.”

- Mr. Jamal Pervez, Head – Projects, McDonald's India (North & East)

Products



MR16



Latina

Case Study

East India
Commercial Co.
Andhra Pradesh, India



“We evaluated different players for LED lighting and chose Philips because they are the best. I am in love with Philips products and if it is meeting my requirement, there is no reason to divorce.”

- Brij Gopal Lunani, Managing Director -East India Commercial Company

Product



LEDtube



Case Study



ITC Maurya Hotel
New Delhi, India

“ITC Hotels is a pioneer in eco initiatives. It is important that our hotels are not only energy efficient but the ambience is also appealing for our guests. Lighting constitutes almost 25% of our energy costs. Use of LED lights helps in almost 80% energy savings v/s conventional lighting. With use of Philips LED lights, we have not only saved energy costs but have also maintained the guest experience without compromising the ambience thereby creating a win win situation.”

- Mr.Niranjan Khatri, Head – Sustainability Initiatives, ITC Welcomgroup

Products




ColorFuse Powercore



Dynalite controls

CFL Ni Lamps

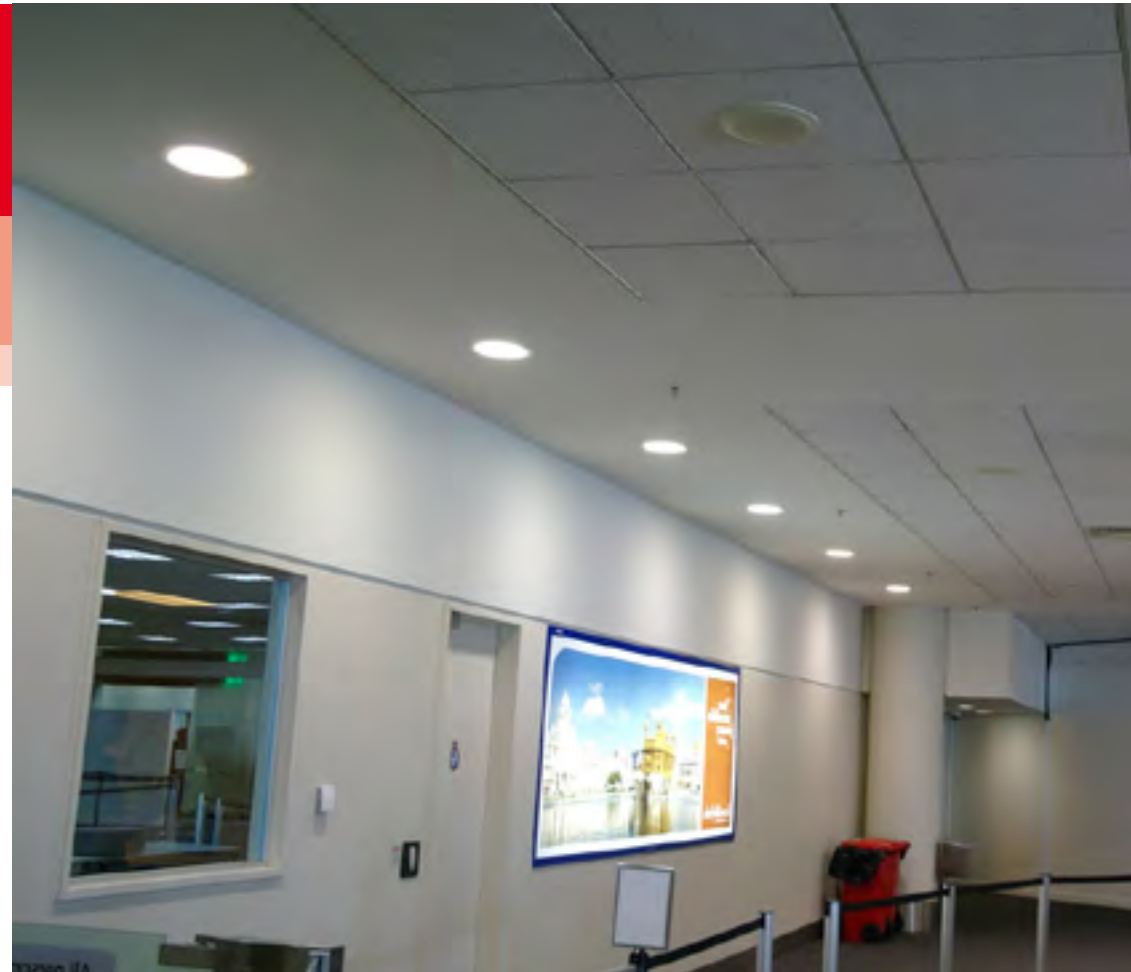

CFL Ni Lamps

142



| Type | M.R.P(Rs.) |
|-------------------------------------|------------|
| MASTER PL-C 10W/827/2P 1CT/5X10CT | 115 |
| MASTER PL-C 10W/840/2P 1CT/5X10CT | 115 |
| MASTER PL-C 10W/827/4P 1CT/5X10CT | 115 |
| MASTER PL-C 10W/840/4P 1CT/5X10CT | 115 |
| MASTER PL-C 10W/865/2P 1CT/5X10CT | 115 |
| MASTER PL-C 13W/827 1CT/5X10CT | 115 |
| MASTER PL-C 13W/840/2P 1CT/5X10CT | 115 |
| MASTER PL-C 13W/865/2P 1CT/5X10CT | 115 |
| MASTER PL-C 13W/827/4P 1CT/5X10CT | 115 |
| MASTER PL-C 13W/840/4P 1CT/5X10CT | 115 |
| MASTER PL-C 18W/840/2P 1CT/5X10CT | 115 |
| MASTER PL-C 18W/840/4P 1CT/5X10CT | 120 |
| MASTER PL-C 18W/827/2P 1CT/5X10CT | 120 |
| MASTER PL-C 18W/865/2P 1CT/5X10CC | 120 |
| MASTER PL-C 26W/865/2P 1CT/5X10CC | 165 |
| MASTER PL-C 26W/830/4P 1CT/5X10BOX. | 165 |
| MASTER PL-C 26W/827/2P 1CT/5X10CC | 165 |
| MASTER PL-C 26W/840/2P 1CT/5X10CC | 165 |
| MASTER PL-C 26W/865/2P 1CT/5X10CC | 165 |
| MASTER PL-C 10W/865/4P 1CT/5X10CT | 115 |
| MASTER PL-C 13W/865/4P 1CT/5X10CT | 115 |
| MASTER PL-C 18W/827/4P 1CT/5X10CT | 120 |
| MASTER PL-C 18W/830/4P 1CT/5X10CC | 120 |
| MASTER PL-C 18W/865/4P 1CT/5X10CC | 120 |
| MASTER PL-C 26W/830/4P 1CT/5X10CC | 165 |
| MASTER PL-C 26W/840/4P 1CT/5X10CC | 165 |
| MASTER PL-C 26W/865/4P 1CT/5X10CC | 165 |

CFL Ni Lamps

143



| Type | M.R.P(Rs.) |
|--|------------|
| MASTER PL-L 36W/830/4P 1CT/25 | 145 |
| MASTER PL-L 36W/840/4P 1CT/25 | 145 |
| MASTER PL-L 36W/865/4P 1CT/25 | 145 |
| MASTER PL-L 18W/827/4P 1CT/25 | 145 |
| MASTER PL-L 18W/840/4P 1CT/25 | 145 |
| MASTER PL-L 18W/865/4P 1CT/25 | 145 |
| MASTER PL-L 24W/830/4P 1CT/25 | 145 |
| MASTER PL-L 24W/865/4P 1CT/25 | 145 |
| MASTER PL-L 36W/827/4P 1CT/25 | 145 |
| MASTER PL-L 40W/840/4P 1CT/25 | 285 |
| MASTER PL-L 40W/865/4P 1CT/25 | 205 |
| MASTER PL-L 55W/830/4P 1CT/25 | 315 |
| MASTER PL-L 55W/840/4P 1CT/25 | 315 |
| MASTER PL-L 55W/865/4P 1CT/25 | 315 |
| MASTER PL-L 90 DE LUXE 55W/950/4P 1CT/10 | 350 |
| MASTER PL-L 80W/830/4P 1CT/25 | 410 |



| Type | M.R.P(Rs.) |
|------------------------|------------|
| PL-S 9W/865/4P 1CT/25 | 90 |
| PL-S 11W/840/4P 1CT/25 | 95 |
| PL-S 11W/865/4P 1CT/25 | 95 |
| PL-S 9W/827/2P 1CT/25 | 90 |
| PL-S 9W/840/2P 1CT/25 | 90 |
| PL-S 9W/865/2P 1CT/25 | 90 |
| PL-S 11W/827/2P 1CT/25 | 95 |
| PL-S 11W/840/2P 1CT/25 | 95 |
| PL-S 11W/865/2P 1CT/25 | 95 |
| PL-S 11W/865/2P 1CT/25 | 95 |

CFL Ni Lamps


144



Master
PL-T

| Type | M.R.P(Rs.) |
|------------------------------------|------------|
| MASTER PL-T 32W/840/4P ICT/5X10BOX | 395 |
| MASTER PL-T 42W/830/4P ICT/5X10BOX | 420 |
| MASTER PL-T 42W/840/4P ICT/5X10BOX | 420 |
| MASTER PL-S 11W/827/4P ICT/25 | 95 |
| MASTER PL-T 13W/827/4P ICT/5X10BOX | 120 |
| MASTER PL-T 18W/827/4P ICT/5X10BOX | 145 |
| MASTER PL-T 57W/840/4P ICT/5X10BOX | 450 |
| PL-T 18W/827/4P ICT/12 | 145 |

NOTE: MRP indicated for each product is for single unit only

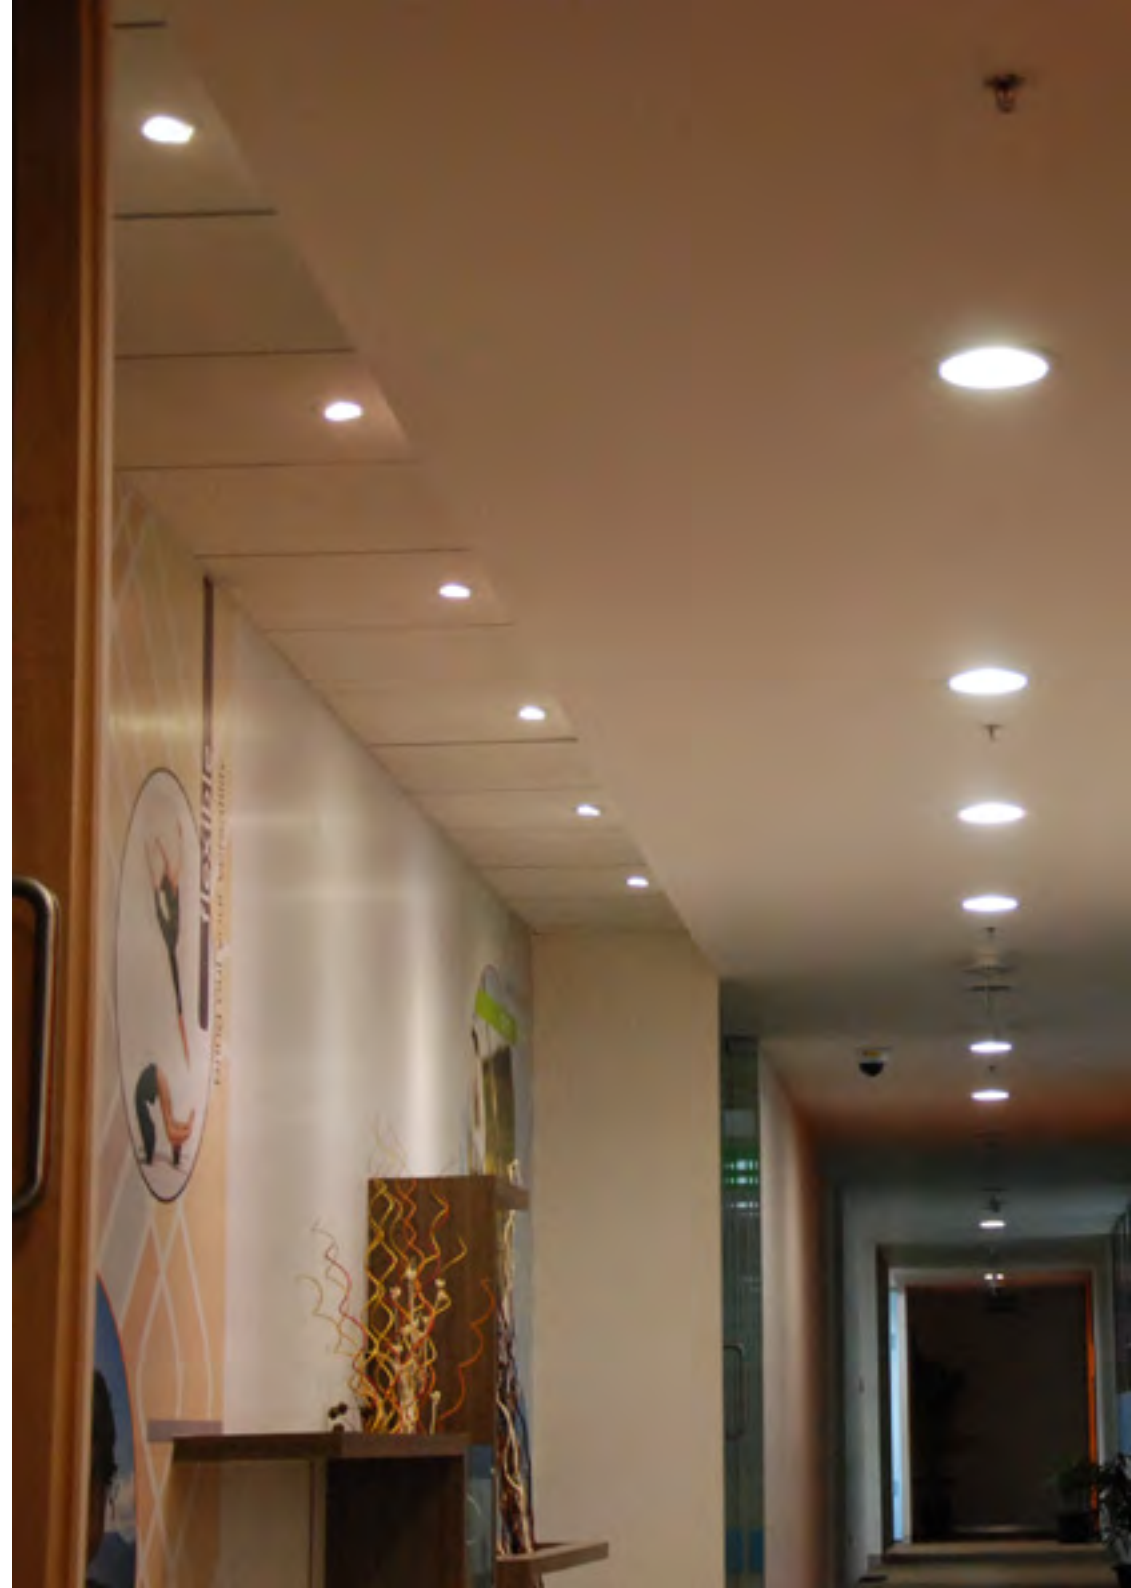

Tubular Lamps




Tubular Lamps



Eco Lamps

| Type | M.R.P(Rs.) |
|-------------------------------------|------------|
| MASTER TL5 HE ECO 13=14W/840 ISL/20 | 285 |
| MASTER TL5 HE ECO 13=14W/865 ISL/20 | 285 |
| MASTER TL5 HE ECO 13=14W/865 ISL/40 | 320 |
| MASTER TL5 HO ECO 20=24W/865 ISL/20 | 300 |
| MASTER TL5 HE ECO 25=28W/840 ISL/20 | 320 |
| MASTER TL5 HE ECO 25=28W/865 ISL/20 | 320 |
| MASTER TL5 HE ECO 25=28W/865 UNP/40 | 320 |
| MASTER TL5 HE ECO 25=28W/865 ISL/40 | 320 |
| MASTER TL5 HO ECO 50=54W/865 ISL/40 | 320 |
| MASTER TL5 HO ECO 50=54W/865 ISL/20 | 335 |
| MASTER TL5 HE ECO 25=28W/830 ISL/20 | 320 |
| MASTER TL5 HO ECO 50=54W/840 ISL/20 | 335 |



Circular Lamps

| Type | M.R.P(Rs.) |
|------------------------------------|------------|
| MASTER TL5 CIRCULAR 22W/830 ICT/10 | 245 |
| MASTER TL5 CIRCULAR 22W/840 ICT/10 | 245 |
| MASTER TL5 CIRCULAR 22W/865 ICT/10 | 245 |
| MASTER TL5 CIRCULAR 40W/830 ICT/10 | 405 |
| MASTER TL5 CIRCULAR 40W/840 ICT/10 | 405 |
| MASTER TL5 CIRCULAR 40W/865 ICT/10 | 405 |
| MASTER TL5 CIRCULAR 55W/830 ICT/10 | 418 |
| MASTER TL5 CIRCULAR 55W/840 ICT/10 | 418 |
| MASTER TL5 CIRCULAR 55W/865 ICT/10 | 422 |
| MASTER TL5 CIRCULAR 60W/830 ICT/10 | 550 |
| MASTER TL5 CIRCULAR 60W/840 ICT/10 | 550 |
| MASTER TL5 CIRCULAR 60W/865 ICT/10 | 550 |
| ESSENTIAL TL5C 22W/840 ICT/10 | 120 |
| ESSENTIAL TL5C 22W/865 ICT/10 | 120 |
| ESSENTIAL TL5C 55W/865 ICT/10 | 275 |

Tubular Lamps




Extra / Extreme Lamps

| Type | M.R.P(Rs.) |
|-----------------------------------|------------|
| MASTER TL5 HO XTRA 54W/840 SLV/20 | 545 |
| MASTER TL-D XTRA 36W/840 SLV/25 | 340 |
| MASTER TL-D XTRA 36W/865 SLV | 340 |
| MASTER TL-D XTREME 36W/830 SLV | 385 |
| MASTER TL-D XTREME 36W/840 SLV | 385 |
| MASTER TL-D XTREME 36W/865 SLV | 385 |



NG Lamps - T8

| Type | M.R.P(Rs.) |
|---------------------|------------|
| TL-D 18W/827 ISL/25 | 100 |
| TL-D 18W/840 ISL/25 | 125 |
| TL-D 18W/865 ISL/25 | 125 |
| TL-D 36W/827 ISL/25 | 135 |
| TL-D 36W/830 ISL/25 | 135 |
| TL-D 36W/865 ISL/25 | 135 |
| TL-D 36W/840 ISL/25 | 135 |




Other Imported


| Type | M.R.P(Rs.) |
|------------------------|------------|
| TL-D 15W/54-765 ISL/50 | 65 |
| TL-D 15W/54-765 ISL/50 | 65 |
| TL-D 30W/865 ES ISL/25 | 350 |
| TL-D 30W/840 ES ISL/25 | 100 |
| TL-D 30W/54-765 ISL/25 | 90 |
| TL-D 58W/840 ISL/25 | 205 |
| TL-D 58W/54-765 ISL/25 | 110 |
| TL-D 58W/865 ISL/25 | 205 |

Tubular Lamps

150



| Type | M.R.P(Rs.) |
|------------------------------|------------|
| MASTER TL5 HE 14W/827 SLV/40 | 180 |
| MASTER TL5 HE 14W/830 SLV/40 | 180 |
| MASTER TL5 HE 14W/840 SLV/40 | 180 |
| MASTER TL5 HE 14W/865 SLV/40 | 180 |
| MASTER TL5 HE 28W/827 SLV/40 | 180 |
| MASTER TL5 HE 28W/830 SLV/40 | 180 |
| MASTER TL5 HE 28W/840 SLV/40 | 180 |
| MASTER TL5 HE 28W/850 SLV/40 | 180 |
| MASTER TL5 HE 28W/865 SLV/40 | 180 |
| MASTER TL5 HE 28W/865 SLV/40 | 180 |
| MASTER TL5 HE 35W/827 SLV/40 | 290 |
| MASTER TL5 HE 35W/840 SLV/40 | 290 |



| Type | M.R.P(Rs.) |
|------------------------------|------------|
| MASTER TL5 HO 24W/865 SLV/40 | 250 |
| MASTER TL5 HO 24W/840 SLV/40 | 250 |
| MASTER TL5 HO 39W/830 SLV/40 | 290 |
| MASTER TL5 HO 49W/840 SLV/40 | 420 |
| MASTER TL5 HO 54W/827 UNP/40 | 210 |
| MASTER TL5 HO 54W/827 SLV/40 | 210 |
| MASTER TL5 HO 54W/840 SLV/40 | 210 |
| MASTER TL5 HO 54W/865 SLV/40 | 210 |
| MASTER TL5 HO 80W/840 SLV/40 | 290 |
| MASTER TL5 HO 80W/865 SLV/40 | 290 |

Tubular Lamps

151



| Type | M.R.P(Rs.) |
|---------------------------------|------------|
| TL5 ESSENTIAL HE 28W/830 ISL/80 | 120 |
| TL5 ESSENTIAL HE 28W/840 ISL/80 | 120 |
| TL5 ESSENTIAL HE 28W/865 ISL/80 | 120 |
| TL5 ESSENTIAL HE 14W/830 ISL/80 | 118 |
| TL5 ESSENTIAL HE 14W/840 ISL/80 | 118 |
| TL5 ESSENTIAL HE 14W/865 ISL/80 | 118 |



| Type | M.R.P(Rs.) |
|--------------------------------|------------|
| CHAMPION AR LIGHT INSURED IND | 43 |
| CHAMP AR 40/54 Industrial pkg | 45 |
| SLIMLITE 18W Industrial | 43 |
| CHAMP AR 36/54 Industrial Pkg. | 45 |



| Type | M.R.P(Rs.) |
|-------------------------------|------------|
| TL 20W/54-765 ISL/25 | 46 |
| TL 40W Champion 3 in 1 | 50 |
| TL 40W/54 FLUO LAMP (LV F) | 45 |
| PHILIPS LIFEMAX 18W TUBELIGHT | 46 |
| TL-D 36W/54-765 ISL/30 | 48 |



“We were setting up a world class office in India which is environmentally friendly and uses energy efficient products. After evaluating proposals from multiple vendors, we shortlisted Philips energy efficient lighting solutions. We are very satisfied and proud to have partnered with Philips for this project.”

- Mr. Deepak Gupta, COO & Country Head, India, Initto Technologies

Products



Arano




Celino

CFLi Lamps



CFLi Lamps

156



| Type | M.R.P(Rs.) |
|---|------------|
| TORNADO HPF 5W CDL B22 220-240V ICT/12 | 240 |
| TORNADO HPF 5W CDL E14 220-240V ICT/12 | 240 |
| TORNADO HPF 5W CDL E27 220-240V ICT/12 | 240 |
| TORNADO HPF 5W WW B22 220-240V ICT/12 | 240 |
| TORNADO HPF 5W WW E14 220-240V ICT/12 | 240 |
| TORNADO HPF 5W WW E27 220-240V ICT/12 | 240 |
| TORNADO HPF 8W CDL B22 220-240V ICT/12 | 260 |
| TORNADO HPF 8W CDL E14 220-240V ICT/12 | 260 |
| TORNADO HPF 8W CDL E27 220-240V ICT/12 | 260 |
| TORNADO HPF 8W WW B22 220-240V ICT/12 | 260 |
| TORNADO HPF 8W WW E14 220-240V ICT/12 | 260 |
| TORNADO HPF 8W WW E27 220-240V ICT/12 | 260 |
| TORNADO HPF 11W CDL B22 220-240V ICT/12 | 285 |
| TORNADO HPF 11W CDL E14 220-240V ICT/12 | 285 |
| TORNADO HPF 11W CDL E27 220-240V ICT/12 | 285 |
| TORNADO HPF 11W WW B22 220-240V ICT/12 | 285 |
| TORNADO HPF 11W WW E14 220-240V ICT/12 | 285 |
| TORNADO HPF 11W WW E27 220-240V ICT/12 | 285 |
| TORNADO HPF 15W CDL B22 ICT/4X12 | 265 |
| TORNADO HPF 15W CDL E27 220-240V ICT/12 | 265 |
| TORNADO HPF 15W WW B22 220-240V ICT/12 | 265 |
| TORNADO HPF 15W WW E27 220-240V ICT/12 | 265 |
| TORNADO HPF 20W CDL B22 ICT/4X12 | 285 |
| TORNADO HPF 20W CDL E27 220-240V ICT/12 | 285 |
| TORNADO HPF 20W WW B22 220-240V ICT/12 | 285 |
| TORNADO HPF 20W WW E27 220-240V ICT/12 | 285 |
| TORNADO HPF 23W CDL B22 ICT/4X12 | 305 |
| TORNADO HPF 23W CDL E27 220-240V ICT/12 | 305 |
| TORNADO HPF 23W WW B22 220-240V ICT/12 | 305 |
| TORNADO HPF 23W WW E27 220-240V ICT/12 | 305 |
| TORNADO 27W CDL B22 220-240 ICT/12 | 365 |

CFLi Lamps

157



| | |
|--|-----|
| TORNADO 27W CDL E27 220-240 ICT/12 | 365 |
| TORNADO 27W WW B22 220-240 ICT/12 | 365 |
| TORNADO 27W WW E27 220-240 ICT/12 | 365 |
| TORNADO 32W CDL B22 220-240V ICT/12 | 455 |
| TORNADO 32W WW B22 220-240V ICT/12 | 455 |
| TORNADO 42W CDL B22 220-240V ICT/12 | 600 |
| TORNADO HPF (VWV) 15W 220-240V G24 CDL | 265 |

| Type | M.R.P(Rs.) |
|--|------------|
| Essential HPF 8W CDL B22 220-240V ICT/12 | 155 |
| Essential HPF 8W WW B22 220-240V ICT/12 | 155 |
| Essential HPF 14WCDL B22 220-240V ICT/12 | 170 |
| Essential HPF 14W WW B22 220-240V ICT/12 | 170 |
| Essential HPF 18WCDL B22 220-240V ICT/12 | 215 |
| Essential HPF 18WCDL E27 220-240V ICT/12 | 215 |
| Essential HPF 18W WW B22 220-240V ICT/12 | 215 |
| Essential HPF 18W WW E27 220-240V ICT/12 | 215 |
| Essential HPF 23WCDL B22 220-240V ICT/12 | 250 |
| Essential HPF 23WCDL E27 220-240V ICT/12 | 250 |
| Essential HPF 23W WW B22 220-240V ICT/12 | 250 |
| ESSENTIAL HPF 23W WW E27 220-240V ICT/12 | 250 |
| Essential 35W CDL B22 220V ICT/6 | 495 |
| Essential 50W CDL B22 220V ICT/6 | 725 |
| Essential 70W CDL B22 220V ICT/6 | 795 |

CFLi Lamps



| Type | M.R.P(Rs.) |
|---------------------------------------|------------|
| GENIE HPF 5W CDL B22 220-240V ICT/12 | 150 |
| GENIE HPF 5W CDL E14 220-240V ICT/12 | 150 |
| GENIE HPF 5W WW B22 220-240V ICT/12 | 150 |
| GENIE HPF 5W WW B22 220-240V ICT/12 | 150 |
| GENIE HPF 5W WW E14 220-240V ICT/12 | 150 |
| GENIE HPF 5W WW E27 220-240V ICT/12 | 150 |
| GENIE HPF 8W CDL B22 220-240V ICT/12 | 165 |
| GENIE HPF8W CDL E14 220-240V ICT/12 | 165 |
| GENIE HPF 8W CDL E27 220-240V ICT/12 | 165 |
| GENIE HPF 8W WW B22 220-240V ICT/12 | 165 |
| GENIE HPF8W WW E14 220-240V ICT/12 | 165 |
| GENIE HPF 8W WW E27 220-240V ICT/12 | 165 |
| GENIE HPF 11W CDL B22 220-240V ICT/12 | 180 |
| GENIE HPF11W CDL E14 220-240V ICT/12 | 180 |
| GENIE HPF 11W CDL E27 220-240V ICT/12 | 180 |
| GENIE HPF 11W WW B22 220-240V ICT/12 | 180 |
| GENIE HPF11W WW E14 220-240V ICT/12 | 180 |
| GENIE HPF 11W WW E27 220-240V ICT/12 | 180 |
| GENIE HPF 14W CDL B22 220-240V ICT/12 | 190 |
| GENIE HPF 14W CDL E27 220-240V ICT/12 | 190 |
| GENIE HPF 14W WW B22 220-240V ICT/12 | 190 |
| GENIE HPF 14W WW E27 220-240V ICT/12 | 190 |



| Type | M.R.P(Rs.) |
|---|------------|
| Ambiance B35 5W WW E27 220-240V ICT/12 | 255 |
| Ambiance B35 5W CDL E27 220-240V ICT/12 | 255 |
| Ambiance B35 5W WW B22 220-240V ICT/12 | 255 |
| Ambiance B35 5W CDL B22 220-240V ICT/12 | 255 |
| Ambiance B35 8W WW E27 220-240V ICT/12 | 270 |
| Ambiance B35 8W CDL E27 220-240V ICT/12 | 270 |
| Ambiance B35 8W WW E14 220-240V ICT/12 | 270 |
| Ambiance B35 8W CDL E14 220-240V ICT/12 | 270 |

CFLi Lamps

| | |
|---|-----|
| Ambiance B35 8W WW B22 220-240V ICT/12 | 270 |
| Ambiance B35 8W CDL B22 220-240V ICT/12 | 270 |
| Ambiance P45 5W WW E27 220-240V ICT/12 | 250 |
| Ambiance P45 5W CDL E27 220-240V ICT/12 | 250 |
| Ambiance P45 5W WW B22 220-240V ICT/12 | 250 |
| Ambiance P45 5W CDL B22 220-240V ICT/12 | 250 |
| Ambiance P45 8W WW E27 220-240V ICT/12 | 265 |
| Ambiance P45 8W CDL E27 220-240V ICT/12 | 265 |
| Ambiance P45 8W WW E14 220-240V ICT/12 | 265 |
| Ambiance P45 8W CDL E14 220-240V ICT/12 | 265 |
| Ambiance P45 8W WW B22 220-240V ICT/12 | 265 |
| Ambiance P45 8W CDL B22 220-240V ICT/12 | 265 |
| AMBIANCE GL 14W CDL B22 220-240V ICT/6 | 460 |
| AMBIANCE GL 14W WW B22 220-240V ICC/6 | 460 |
| AMBIANCE GL 14W WW E27 220-240V ICT/6 | 460 |
| AMBIANCE GL 18W CDL B22 220-240V ICT/6 | 485 |
| AMBIANCE GL 18W WW B22 220-240V ICC/6 | 485 |
| AMBIANCE GL 18W WW E27 220-240V ICC/6 | 485 |

CFLi Lamps

160



New
PAR38

| Type | M.R.P(Rs.) |
|----------------------------------|------------|
| PAR38 23W WW E27 220-240V ICT/6 | 575 |
| PAR38 23W CDL E27 220-240V ICT/6 | 575 |
| PAR38 23W WW B22 220-240V ICT/6 | 575 |
| PAR38 23W CDL B22 220-240V ICT/6 | 575 |



Decotwist

| Type | M.R.P(Rs.) |
|--------------------------------------|------------|
| DECOTWIST 25W CDL B22 220-240V ICT/4 | 475 |
| DECOTWIST 25W WW B22 220-240V ICT/4 | 475 |



EHL
Twister

| Type | M.R.P(Rs.) |
|--|------------|
| EHL Twister 45W CDL B22 220-240V ICT/6 | 725 |
| EHL Twister 45W CDL E27 220-240V ICT/6 | 725 |
| EHL Twister 45W CW B22 220-240V ICT/6 | 725 |
| EHL Twister 45W CW E27 220-240V ICT/6 | 725 |
| EHL Twister 65W CDL B22 220-240V ICT/6 | 875 |
| EHL Twister 65W CDL E27 220-240V ICT/6 | 875 |
| EHL Twister 65W CW B22 220-240V ICT/6 | 875 |
| EHL Twister 65W CW E27 220-240V ICT/6 | 875 |
| EHL Twister 80W CDL E40 220-240V ICT/6 | 990 |
| EHL Twister 80W CW E40 220-240V ICT/6 | 990 |



Lighting Electronics

Ballast for High Intensity Discharge Lamps

| | |
|----------------------------------|---------|
| Electronic Ballast for HID lamps | 166-168 |
| Electronic Ignitors | 169 |

Ballast for lamps and compact fluorescent lamps

| | |
|------------------------------|---------|
| Electronic Ballast | 172-173 |
| Electromagnetic Control gear | 174 |
| Dimming Ballast | 174-175 |
| Consumer Ballast | 175 |

Halogen transformer

| | |
|---|---------|
| Transformer for Low Voltage Halogen Lamps | 178-179 |
|---|---------|

Electronic Ballast for HID Lamps



Electronic Ballast for High Intensity Discharge Lamps



Electronic control gear

| Type | Suitable for | Ordering No | Qty.per box | LP (Rs.) |
|--|--------------|--------------|-------------|----------|
| HID-PV m 1x020/S CDM LPF 220-240V | CDM min 20W | 913712005214 | 12 | 4886 |
| HID-PV m 35 /S CDM HPF 220-240V 50/60Hz | CDM min 35W | 913700653666 | 12 | 5174 |
| HID-CV 35 /S CDM 220-240V 50/60Hz | CDM 35W | 913702247042 | 12 | 2892 |
| HID-CV 70 /S CDM 220-240V 50/60Hz | CDM 70W | 913702247032 | 12 | 2892 |
| HID-PV 150 /S CDM 220-240V 50/60Hz | CDM 150W | 913700658966 | 12 | 5675 |
| HID- CV 50W CDM 220-240 50/60 Hz | CDM 50W | 913702247052 | 12 | 3402 |



Integrated ballast unit for sodium & Metal Halide lamps (SON/HPI plus/ CDM)

| Type | Suitable for | Ordering No | Qty.per box | LP (Rs.) |
|---------------|----------------------------|--------------|-------------|----------|
| IBU 70W PLUS | MHN / CDM 70W | 913702255032 | 6 | 1225 |
| IBU 150W PLUS | MHN / CDM 150W | 913702255132 | 6 | 1542 |
| IBU 355 | CDM 35W | 913702255212 | 8 | 1100 |
| IBU 250 Plus | SON / MHN / HPI / CDM 250W | 913713410214 | 4 | 2200 |
| IBU 400 Plus | SON / HPI / 400W | 913713410314 | 4 | 2948 |



HID dimming ballast and controller sodium lamps (SON/SON-T)

| Type | Suitable for | Ordering No | Qty.per box | LP (Rs.) |
|---------------|--------------|--------------|-------------|----------|
| BSN 150 x262 | SON 150W | 913702253812 | 4 | 1656 |
| BSN 250 x 262 | SON 250W | 913702253532 | 4 | 2245 |
| BSN 400 x262 | SON 400W | 913702253642 | 4 | 3005 |



Electronic Ballast for High Intensity Discharge Lamps



Control gear mercury & Metal Halide lamps

| Type | Suitable for | Ordering No | Qty.per box | LP (Rs.) |
|--------------|--------------------|--------------|-------------|----------|
| PHL 1000x261 | HPI-T 1000W | 913702259112 | 2 | 5897 |
| BHL 080 M261 | HPL 80W | 913702251512 | 8 | 816 |
| BHL 125 M261 | HPL 125W | 913702251612 | 12 | 896 |
| BHL 250x261 | HPL/HPI/HPI-T 250W | 913702253012 | 4 | 1588 |
| BHL 400x261 | HPL/HPI/HPI-T 400W | 913702253112 | 4 | 2041 |



Control gear Sodium & Metal Halide lamps (SON/ HPI Plus/CDM)

| Type | Suitable for | Ordering No | Qty.per box | LP (Rs.) |
|--------------|-----------------------------|--------------|-------------|----------|
| PSN 1000x261 | SON 1000W | 913702259332 | 2 | 5897 |
| BSN 070 M261 | SON 70W | 913702251012 | 8 | 998 |
| BSN 150x261 | SON / MHN / CDM 150W | 913702253212 | 4 | 1588 |
| BSN 250x261 | SON/MHNT-D/ HPI-T PLUS 250W | 913702253412 | 4 | 1958 |
| BSN 400x261 | SON / HPI-T PLUS 400W | 913702253612 | 4 | 2835 |
| BSN 150 M362 | SON 150W | 913702253322 | 4 | 1383 |
| BSN 250 M361 | SON 250W | 913702253722 | 4 | 1792 |
| BSN 400 M361 | SON 400W | 913702253612 | 4 | 2835 |
| BMH 70x261 | MHN/CDM 70W | 913702251112 | 12 | 1021 |



Control gear Sodium & Metal Halide lamps aluminium range

| Type | Suitable for | Ordering No | Qty.per box | LP (Rs.) |
|---------------|-----------------------------|--------------|-------------|----------|
| BSN 070 M 363 | SON/MHNT/ CDM 70W | 913702251122 | 12 | 794 |
| BSN 150 M 363 | SON / MHN/ CDM 150W | 913702253332 | 4 | 1225 |
| BSN 250 M 363 | SON /MHN-T/ HPI-T PLUS 250W | 913713205914 | 4 | 1588 |
| BSN 400 M 363 | SON /MHN-T/ HPI-T PLUS 400W | 913713420014 | 4 | 1950 |

Electronic Ignitors



Ignitors

| Type | Suitable for | Ordering No | Qty.per box | LP (Rs.) |
|----------|---------------------------------|--------------|-------------|----------|
| SN58/02 | SON 150/250/ 400W / MHN-TD 150W | 913702261012 | 50 | 534 |
| SN 57/02 | SON 70W / MHN-TD 70W | 913702261112 | 50 | 534 |
| SN 59 | SON 1000W LAMP | 913619659966 | 20 | 1358 |
| SI 51/02 | Metal Halide 250/400W | 913702261212 | 50 | 534 |
| SI 52/02 | Metal Halide 1kW/2 kW | 913702261312 | 50 | 534 |
| IN 124 S | SON 50/250/ 400W / MHN-TD 150W | 913702262012 | 50 | 284 |

Ballast for TL and compact fluorescent lamps



Electronic Ballast



| Type | Suitable for | Ordering No | Qty.per box | LP (Rs.) |
|---|--|--------------|-------------|----------|
| EBP 136/140/136/139 TL-D/PL-L/PL-L/TL5HO 240V | 1x36WTLD/PLL,40W PLL,39W TL5 | 913702246022 | 10 | 745 |
| EBP 236 TL-D/PL-L 240V | 2xTLD36 or PLL36 | 913702246122 | 10 | 799 |
| EBP 336 TLD/PLL 240V | 3xTLD36 or PLL36 | 913702246222 | 10 | 972 |
| EBP 154/158/155 TL5 HO/TLD/ PL-L 240V | 1xTL5 54 W 1xTLD 58 W 1xPLL 55 W | 913702245521 | 10 | 821 |
| EBP 254/258/255 TL5 HO /TLD/ PL-L 240V | 2xTL5 54 W 2xTLD 58 W 2xPLL 55 W | 913702246322 | 10 | 950 |
| EBP 121/128/135 TL5 HE 240V | 1x28W TL5 1x21W TL5 1x35W TL5 | 913702246032 | 10 | 745 |
| EBP 221/ 228 TL5 HE 240V | 2x28W TL5 2x 21W TL5 | 913702246532 | 10 | 821 |
| EBP 314/ 414 TL5 HE 240V | 4x14W TL5 3x14W TL5 | 913702246422 | 10 | 972 |
| EBP 224/218/224 TL5 HO/TLD/ PL-L 240V | 2xTL5 24W 2xTLD 18W 2x PLL 24W | 913702246822 | 10 | 821 |



| Type | Suitable for | Ordering No | Qty. per box | LP (Rs.) |
|------------------|--------------|--------------|--------------|----------|
| EBT 136 TLD 240 | 1xTL 36W/40W | 913702244812 | 10 | 497 |
| EBT 236 TLD 240 | 2xTL 36W/40W | 913702244912 | 10 | 659 |
| EBT 218 TLD 240 | 2xTL 18W/20W | 913702249112 | 10 | 659 |
| EBT 128 TL5 240 | 1xTL5 28W | 913702249222 | 10 | 648 |
| EBT 228 TL5 240 | 2xTL5 28W | 913702249232 | 10 | 648 |
| EB 3/414 TL5 240 | 3/4xTL5 14W | 913702246622 | 10 | 734 |

Electronic Ballast



| Type | Suitable for | Ordering No | Qty.per box | LP (Rs.) |
|-------------------------|--------------|--------------|-------------|----------|
| EBE (Slim) 136 TLD 240V | 1xTL36W/40W | 913702242021 | 10 | 302 |
| EBE 236 TLD 240 | 2xTL36W/40W | 913702242112 | 10 | 529 |
| EBE (Slim) 128 TL5 240V | 1xTL5 28W | 913702242221 | 10 | 335 |
| EBE 228 TL5 240V | 2xTL5 28W | 913702244013 | 10 | 583 |
| EB-E 126 PLC 240 | 1xPLC/T 26W | 913713027514 | 10 | 508 |
| EB-E 226 PLC 240 | 2xPLC/T 26W | 913702245232 | 10 | 616 |
| EB-E 218 PLC 240 | 2xPLC/T 18W | 913702245222 | 10 | 540 |



| Type | Suitable for | Ordering No | Qty.per box | LP (Rs.) |
|--------------------------------------|----------------------|--------------|-------------|----------|
| HF-P 2 22-42 PL-T/C 220-240V 50/60Hz | 2xPLC/T/TL5C 22..42W | 913700630866 | 10 | 2297 |



| Type | Suitable for | Ordering No | Qty.per box | LP (Rs.) |
|---------------------|---------------------------|--------------|-------------|----------|
| EB-S 109 220-240 SH | 1xPL-S7/9W-4P 1xPL-C | 913700421366 | 50 | 661 |
| EB-S 114 230 SH | 10/13W OR 1xPL-S11W-4P | 913702243012 | 50 | 259 |
| EB-S 118 230 SH | 1xPL-C/PL-T 18 W | 913702243112 | 50 | 248 |
| EB-S 124 220-240 LH | 1xPL-L 18/24 W | 913713035066 | 50 | 633 |

Electromagnetic control gear



| Type | Suitable for | Ordering No | Qty.per box | LP (Rs.) |
|---------------|------------------|--------------|-------------|----------|
| BTA 018 K 36I | TLD 18W / TL 20W | 913713410014 | 20 | 248 |
| K-05 | TLD 36W / TL 40W | 913702234032 | 20 | 231 |
| BTA 036 X26I | TLD 36W / TL 40W | 913702234512 | 20 | 277 |
| K-05 ECO | TLD 36W / TL 40W | 913702234052 | 20 | 167 |



| Type | Suitable for | Ordering No | Qty.per box | LP (Rs.) |
|-------------|---------------------------|--------------|-------------|----------|
| BPL 009x26I | 1xPL-S 5/7/9/11W | 913702235012 | 20 | 202 |
| BPL 013x26I | 2xPL-S 5/7/9 W,PLC 10/13W | 913702235112 | 20 | 202 |
| BPL 018x26I | 1xPL-C 18W | 913702235212 | 20 | 208 |
| BPL 026x26I | 1xPL-C 26W | 913702235312 | 20 | 231 |

Dimming Ballast



| Type | Suitable for | Ordering No | Qty.per box | LP (Rs.) |
|---------------------|-----------------|--------------|-------------|----------|
| HF-R 136 TL-D EII | 1xTLD 36W | 913700609266 | 12 | 4025 |
| HF-R 236 TLD EII | 2xTLD 36W | 913700609366 | 10 | 4658 |
| HF-R 218 TLD EII | 2xTLD 18W | 913700620466 | 10 | 4658 |
| HFR 114-35 TL5 EII | 1xTL5 14-35W | 913700619866 | 12 | 3910 |
| HF-R 214-35 EII TL5 | 2xTL5 14-35W | 913700619566 | 12 | 4600 |
| HF-R 154 TL5 EII | 1xTL5 54W | 913700608866 | 12 | 4025 |
| HF-R 254 TL5 EII | 2xTL5 54W | 913700608966 | 12 | 4600 |
| HF-R 136 PLL EII | 1xPL-L 36W | 913700619966 | 10 | 4025 |
| HF-R 236 PLL EII | 2xPL-L 36W | 913700620066 | 10 | 4600 |
| HF-R 155 PLL EII | 1xPL-L 55W | 913700620166 | 10 | 4600 |
| HF-R 255 PLL EII | 2xPL-L 55W | 913700620266 | 10 | 5175 |
| HF-R 218 PL-T/C | 2xPL-T/C 18W | 913700680166 | 24 | 4658 |
| HF-R 2 26-42 PL-T/C | 2xPL-T/C 26-42W | 913700605266 | 24 | 4658 |
| HFR 180 TL5 | 1xTL5/PLL 80W | 913700609066 | 12 | 5175 |
| HFR 280 TL5 | 2xTL5/PLL 80W | 913700609166 | 12 | 5750 |



| Type | Suitable for | Ordering No | Qty.per box | LP (Rs.) |
|-----------------------------------|-----------------------------------|--------------|-------------|----------|
| HF-R 414 TL5 EII 220-240V 50-60Hz | 4xTL5 14W | 913700614466 | 12 | 5405 |
| HF-R TD 414 TL5 EII | 4xTL5 14W | 913700614566 | 12 | 5865 |
| HF-Ri TD 1 28/35/49/54 TL5 E+ | 1xTL5 28/35/49/54W, TLD 36, PLL36 | 913700656066 | 12 | 4658 |
| HF-Ri TD 2 28/35/49/54 TL5 E+ | 2xTL5 28/35/49/54W, TLD 36, PLL36 | 913700656166 | 12 | 5175 |
| HF-Ri TD 1 35/49/80 TL5 E+ | 1xTL5 35/49/80W, PLL36 | 913700655966 | 12 | 4658 |
| HF-Ri TD 1 14/21/24/39 TL5 E+ | 1xTL5 14/21/24/39W, | 913700698366 | 12 | 4658 |
| HF-Ri TD 2 26-42 PL-T/C E+ | 2xPL-T/C 26-42W | 913700684866 | 12 | 5865 |

| Type | Suitable for | Ordering No | Qty.per box | LP (Rs.) |
|---------------------------|--------------|--------------|-------------|----------|
| EB-R AmbiStar 1 14-35 TL5 | 1xTL5 14-35W | 913700672066 | 12 | 2300 |
| EB-R AmbiStar 2 14-35 TL5 | 1xTL5 14-35W | 913700672166 | 12 | 2645 |
| EB-R AmbiStar 3/4 14 TL5 | 3/4xTL5 14W | 913700672266 | 12 | 3105 |

Consumer Ballast



| Type | Suitable for | Ordering No | Qty.per box | NSP (Rs.) |
|------------------------|--------------------------------|--------------|-------------|-----------|
| EB-FS 136 TLD 240 | 1xTL 36W/40W | 913702241220 | 10 | 139 |
| EB-FS 128 T5 240 | 1xTL5 28w | 913702241320 | 10 | 167 |
| EB-FU 136 TLD 240 | 1xTL 36W/40W | 913702241410 | 30 | 115 |
| EB-FU 118 TLD 240 | 1xTL 18W/20W | 913702241510 | 10 | 115 |
| EB-S 114 TL/PLS/PLC SH | 1xPL-C 10/13W OR 1xPL-S 11W-4P | 913702243010 | 20 | 103 |
| EB-S 118 PLC/PLT SH | 1xPL-C/PL-T 18W | 913702243110 | 20 | 97 |
| SILVERLINE | TLD 36W / TL 40W | 913702233010 | 20 | 144 |

Halogen transformer



Transformer for Low Voltage Halogen Lamp



Halogen
transformer

| Type | Suitable for | Ordering No | Qty.per box | LP (Rs.) |
|------------------|-----------------------------------|--------------|-------------|----------|
| ET - K 50 | LV HALOGEN 12V/ Up to 50VA | 913702291012 | 50 | 292 |
| ETS-105 220-240V | LV HALOGEN 12V/ Up to 105VA | 913710030302 | 50 | 1035 |
| ETS-150 220-240V | LV HALOGEN 12V/ Up to 150VA | 913710030402 | 50 | 1254 |
| ET-E 10W | 10W MR16 LED lamp | 913710032160 | 24 | 350 |



MainStream Battens



MainStream Battens

Decobattens



| Type | MRP |
|-----------------------|------|
| BN 550 WLED 20 - 3000 | 2890 |
| BN 550 WLED 20 - 6500 | 2890 |
| BN 550 WLED 12 - 3000 | 2110 |
| BN 550 WLED 12 - 6500 | 1990 |
| BN 550 WLED 6 - 3000 | 1099 |
| BN 550 WLED 6 - 6500 | 1099 |

Superior Technology, Longer Life

- Nano diffuser technology to ensure minimum loss in light transmitted
- Zero mercury content – green lighting solution
- Long life of over 30,000 hours

Available in 1ft, 2ft and 4ft variants



| Type | For lamp | MRP |
|----------------------|-----------|------|
| TCH 208 1xTL5 28W HF | 1xTL5 28W | 580* |

Brightness with Efficiency

- Resistant to high voltages: Up to 380V
- Ensures 33% longer lamp life than normal battens
- 45% energy saving deco batten
- High power factor > 0.9



| Type | For lamp | MRP |
|---------------------|----------|------|
| BN 251W 1xTL 14W HF | 1xTL 14W | 575* |
| BN 251W 1xTL 28W HF | 1xTL 28W | 670* |

Extra Slim, Aesthetic Appeal

- Easy installation
- 45% Energy saving v/s 40W TL
- Glare free UV Resistant diffuser



| Type | For lamp | MRP |
|-------------------------------------|-----------|------|
| ADRENO V ² 14W TWG207 | 1xTL5-14W | 585* |
| ADRENO V ² 28W TWG207 HF | 1xTL5-28W | 740* |

Bright & Elegant

- 45% energy saving as compared to 40W conventional batten
- Comes with diffuser; enhances quality of light
- High Power factor (PF >.98) batten
- Warm start operation, helps in extra long life

MainStream Battens

Decobattens



| Type | For lamp | MRP |
|----------------------|-----------|------|
| VECTOR 14W TCH207 | 1xTL5-14W | 540* |
| V2 VECTOR 28W TCH207 | 1xTL5-28W | 635* |

Bright & Elegant

- 45% energy saving as compared to 40W conventional batten
- High Power factor (PF>.98) batten
- 3D Batwing Design channel, enhances light output
- Warm start operation, helps in extra long life



| Type | For lamp | MRP |
|-------------------|-----------------|------|
| ENERGYLINE T5 28W | TMS 095xTL5-28W | 445* |


- High Power factor >0.9
- 45% energy saving compared to conventional 40W batten
- Good light output at low voltages
- Warm start operation - helps in increasing lamp life



| Type | For lamp | MRP |
|---------------------------|------------|------|
| MIROLTA Slim 36W HF | TMS520/136 | 560* |
| MIROLTA Slim 18W HF | TMS520/118 | 460* |
| MIROLTA Slim T5 TMS540 HF | 1xTL5-28W | 660* |
| TMS 540 1xTL5 54W HO | 1xTL5 54W | 880* |

Slim & Sleek

- HPF (high power factor) batten, PF >.9
- Long lasting CRCA body with slim & sleek looks
- Aesthetically designed dual color end caps
- Easy to display & stock as the end caps are packed along with batten



| Type | For lamp | MRP |
|-------------------------------|----------|------|
| MIROLTA CLASSIC 40W TMS510 HF | 1xTL40W | 550* |

Classy & Efficient

- HPF (high power factor) ballast (PF >.9)
- 25% energy saving as compared to 40W conventional batten
- Concealed lamp holders for safety
- Strong jointless CRCA body

*Prices are inclusive of lamp.

MainStream Battens

Striplites



Tarang
Electronic

| Type | For lamp | MRP |
|--------------------------------|----------|------|
| TARANG ELECTRONIC 2' TMC090 EI | 1xTLD18W | 325* |
| TARANG ELECTRONIC 4' TMC090 HF | 1xTLD36W | 380* |

Highly Efficient

- 25% energy saving as compared to 40W conventional batten
- Ignites even at low voltage
- HPF (High power factor) batten, PF >.9



Aspire

| Type | For lamp | MRP |
|---------------|-------------------|------|
| ASPIRE T5 28W | TMS 097xTL5 - 28W | 435* |

Slim smart & efficient

- Electronic decobatten with High Power factor >0.9
- Aesthetically designed slim body with dual colour end brackets. Available with Blue and Gray caps



*Prices are inclusive of lamp.

Modular switches

Active range

188-191

Elite range

192-195

Sleek, Hospitality and common

196-197



Active range

Sleek range

Elite range



Dual shutter technology


Triple Protection technology

Front Removal & Insertion technology

Eco-friendly

Modular Switches

Active




| Type | MRP (Rs.) |
|---|-----------|
| SWITCH 1M-1WAY 10AX 240V AC ACTIVE-WHITE | 102 |
| SWITCH WITH INDICATOR 1M-1WAY 10AX 240V | 126 |
| SWITCH 1M-2WAY 10AX 240V AC ACTIVE-WHITE | 134 |
| SWITCH 1M-1WAY 16AX 240V AC ACTIVE-WHITE | 137 |
| SWITCH WITH INDICATOR 1M-1WAY 16AX 240V | 158 |
| SWITCH 1M-2WAY 16A 240V AC ACTIVE-WHITE | 163 |
| SWITCH DP-2M 20A 240V AC ACTIVE-WHITE | 338 |
| SWITCH DP-2M 32A 240V AC ACTIVE-WHITE | 378 |
| SWITCH BLANK - 1M ACTIVE-WHITE | 28 |
| SWITCH 1M-1WAY 6AX 240V AC ACTIVE-WHITE | 102 |
| SWITCH WITH INDICATOR 1M-1WAY 6AX 240V A | 126 |
| SWITCH 1M-2WAY 6AX 240V AC ACTIVE-WHITE | 134 |
| Switch 1M-1way 20AX 240V AC Active-White | 142 |
| Switch with indicator 1M-1way 20AX 240V AC Active-White | 170 |
| BELL PUSH-1M 10A 240V AC ACTIVE-WHITE | 105 |
| BELL PUSH WITH INDICATOR-1M 10A 240V AC | 121 |
| JUMBO BELL PUSH WITH INDICATOR -2M 10A 2 | 137 |
| BELL PUSH-1M 6A 240V AC ACTIVE-WHITE | 105 |
| BELL PUSH WITH INDICATOR-1M 6A 240V AC A | 121 |
| JUMBO BELL PUSH WITH INDICATOR -2M 6A 24 | 137 |
| 1M Indicator (Red) Active 240V 50Hz AC | 117 |
| Jumbo Switch 2M - 1way 10AX 240V AC -W | 137 |
| Jumbo Switch 2M 2 way 10AX 240V AC - WHITE | 150 |
| Trip Starter 32A Active-white (N) | 184 |
| Trip Starter 25A Active-white (N) | 173 |
| SWITCH 1M-1WAY 10AX 240V AC ACTIVE-DOVE GREY | 106 |
| SWITCH WITH INDICATOR 1M-1WAY 10AX 240V | 131 |
| SWITCH 1M-2WAY 10AX 240V AC ACTIVE-DOVE GREY | 139 |
| SWITCH WITH INDICATOR 1M-1WAY 16AX 240V | 158 |
| SWITCH 1M-2WAY 16A 240V AC ACTIVE-DOVE GREY | 163 |
| SWITCH DP-2M 32A 240V AC ACTIVE-DOVE GREY | 392 |
| SWITCH BLANK - 1M ACTIVE-DOVE GREY | 29 |


Modular Switches

Active

| | |
|--|-----|
| Switch 1M-1way 6AX 240V AC Active-Dove Grey | 106 |
| Switch with indicator 1M-1way 6AX 240V AC Active-Dove Grey | 131 |
| Switch 1M-2way 6AX 240V AC Active-Dove Grey | 139 |
| JUMBO BELL PUSH WITH INDICATOR -2M 10A - Dove Grey | 142 |
| Jumbo Bell Push with indicator -2M 6A 240V AC Active-Dove Grey | 142 |



| Type | MRP (Rs.) |
|--|-----------|
| 2/3 PIN SOCKET WITH SHUTTER -2M 6A 240V - White | 139 |
| UNIVERSAL SOCKET WITH SHUTTER-2M 13A 240 - White | 254 |
| 3 PIN SOCKET WITH SHUTTER - 2M 16A 240V - White | 223 |
| 3 PIN SOCKET WITH SHUTTER - 2M 6-16A 240 - White | 233 |
| 3 PIN SOCKET WITH SHUTTER - 2M 6-25A 240 - White | 265 |
| 2 PIN Socket WITH SHUTTER - 1M 6A 240V - White | 101 |
| 2/3 PIN SOCKET WITH SHUTTER -2M 6A 240V - Dove Grey | 144 |
| UNIVERSAL SOCKET WITH SHUTTER-2M 13A 240 - Dove Grey | 260 |
| 3 PIN SOCKET WITH SHUTTER - 2M 6-16A 240 - Dove Grey | 244 |
| 2 PIN Socket WITH SHUTTER - 1M 6A 240V - Dove Grey | 110 |
| 3 PIN SOCKET WITH SHUTTER - 2M 6-25A 240 - Dove Grey | 275 |




| Type | MRP (Rs.) |
|---|-----------|
| CONTROLLER LIGHT-2M 600W 240V 50HZ AC AC - White | 424 |
| CONTROLLER LIGHT-2M 1000W 240V 50HZ AC - White | 620 |
| CONTROLLER LIGHT-1M 250W 240V 50HZ AC AC - White | 318 |
| FAN REGULATOR-2M WITH ROTARY KNOB 100W 240V - White | 530 |
| FAN REGULATOR-1M WITH ROTARY KNOB 100W 240V - White | 403 |
| CONTROLLER LIGHT-2M 600W 240V 50HZ AC AC - Dove Grey | 451 |
| FAN REGULATOR-2M WITH ROTARY KNOB 100W 240V - Dove Grey | 509 |
| FAN REGULATOR-1M WITH ROTARY KNOB 100W 240V - Dove Grey | 425 |


Modular Switches

Active

190



| Type | MRP (Rs.) |
|---|-----------|
| CONNECTOR RJ 11 WITHOUT SHUTTER ACTIVE-White | 80 |
| CONNECTOR RJ 11 WITH SHUTTER ACTIVE-White | 117 |
| CONNECTOR RJ 45 MOUNTING COVER ACTIVE-White | 48 |
| CONNECTOR TV SOCKET ACTIVE-White | 127 |
| CONNECTOR RJ 45 WITH SOCKET ACTIVE-White | 473 |
| CONNECTOR RJ 11 WITH SHUTTER ACTIVE-Dove Grey | 119 |
| CONNECTOR RJ 45 MOUNTING COVER ACTIVE-Dove Grey | 53 |
| CONNECTOR TV SOCKET ACTIVE- Dove Grey | 133 |
| CONNECTOR RJ 45 WITH SOCKET ACTIVE- Dove Grey | 490 |



| Type | MRP (Rs.) |
|---|-----------|
| Mounting grid with Cover-1M Active-White | 81 |
| Mounting grid with Cover-2M Active-White | 85 |
| Mounting grid with Cover-3M Active-White | 106 |
| Mounting grid with Cover-4M Active-White | 127 |
| Mounting grid with Cover-6M Active-White | 174 |
| Mounting grid with Cover-8M Square Active-White | 223 |
| Mounting grid with Cover-8M linear Act-White | 223 |
| Mounting grid with Cover 12M Active-White | 281 |
| Mounting grid with Cover 18M Active-White | 329 |
| Mounting grid with Cover-1M Active-Dove Grey | 85 |
| Mounting grid with Cover-2M Active-Dove Grey | 90 |
| Mounting grid with Cover-3M Active-Dove Grey | 111 |
| Mounting grid with Cover-4M Active-Dove Grey | 133 |
| Mounting grid with Cover-6M Active-Dove Grey | 180 |
| Mounting grid with Cover-8M Square Active-Dove Grey | 228 |
| Mounting grid with Cover-8M linear Act-Dove Grey | 228 |
| Mounting grid with Cover 12M Active-Dove Grey | 286 |
| Mounting grid with Cover 18M Active-Dove Grey | 334 |

NOTE: MRP indicated for each product is for single unit only



Modular Switches

Elite



Switch

| Type | MRP (Rs.) |
|--|-----------|
| Switch 1M-1way 6AX 240V AC Elite-White | 125 |
| Switch with indicator 1M-1way 6AX 240V AC Elite-White | 168 |
| Switch 1M-2way 6A 240V AC Elite-White | 182 |
| Switch 1M-1way 10AX 240V AC Elite-White | 125 |
| Switch with indicator 1M-1way 10AX 240V AC Elite-White | 168 |
| Switch 1M-2way 10A 240V AC Elite-White | 182 |
| Switch 1M-1way 16AX 240V AC Elite-White | 168 |
| Switch with indicator 1M-1way 16AX 240V AC Elite-White | 189 |
| Switch 1M-2way 16A 240V AC Elite-White | 200 |
| Switch DP-2M 20A 240V AC Elite-White | 371 |
| Switch DP-2M 32A 240V AC Elite-White | 506 |
| Switch blank - 1M Elite-White | 30 |
| Bell push with indicator-1M 6A 240V AC Elite-White | 158 |
| Bell push with indicator-1M 10A 240V AC Elite-White | 158 |
| Jumbo Bell Push with indicator -2M 10A 240V AC Elite-White | 179 |
| Jumbo Bell Push with indicator -2M 6A 240V AC Elite-White | 179 |



Socket

| Type | MRP (Rs.) |
|--|-----------|
| 2/3 Pin socket with shutter -2M 6A 240V AC Elite-White | 165 |
| Universal socket with shutter-2M 13A 240V AC Elite-White | 265 |
| 3 Pin socket with shutter - 2M 6-16A 240V AC Elite-White | 249 |
| 3 Pin socket with shutter - 2M 6-25A 240V AC Elite-White | 290 |



Fan Regulators & Controllers

| Type | MRP (Rs.) |
|--|-----------|
| Controller Light-2M 600W 240V 50Hz AC Elite-White | 530 |
| Controller Light-2M 1000W 240V 50Hz AC Elite-White | 742 |
| Fan regulator with rotary knob 100W 240V 50Hz AC Elite-White | 541 |

Modular Switches

Elite



Connector

| Type | MRP (Rs.) |
|--|-----------|
| Connector RJ 11 with Shutter Elite-White | 127 |
| Connector RJ 45 Mounting Cover Elite-White | 58 |
| Connector-TV Socket Elite-White | 133 |
| Connector RJ 45 with Socket Elite-White | 574 |



Mounting grid

| Type | MRP (Rs.) |
|-------------------------|-----------|
| MOUNTING GRID-1M | 42 |
| MOUNTING GRID-2M | 45 |
| MOUNTING GRID-3M | 54 |
| MOUNTING GRID-4M | 68 |
| MOUNTING GRID-6M | 92 |
| MOUNTING GRID-8M SQUARE | 119 |
| MOUNTING GRID-8M LINEAR | 122 |
| MOUNTING GRID-12M | 156 |
| MOUNTING GRID-18M | 172 |

Modular Switches

Elite




Cover frames

| Type | MRP (Rs.) |
|--|-----------|
| Cover frame -1M Elite-White | 48 |
| Cover frame -2M Elite-White | 53 |
| Cover frame -3M Elite-White | 58 |
| Cover frame -4M Elite-White | 69 |
| Cover frame -6M Elite-White | 95 |
| Cover frame -8M square Elite-White | 117 |
| Cover frame -8M linear Elite-White | 117 |
| Cover frame -12M Elite-White | 148 |
| Cover frame -18M Elite-White | 180 |
| Cover frame -1M Elite-Orient Jade | 187 |
| Cover frame -2M Elite-Orient Jade | 187 |
| Cover frame -3M Elite-Orient Jade | 220 |
| Cover frame -4M Elite-Orient Jade | 275 |
| Cover frame -6M Elite-Orient Jade | 330 |
| Cover frame -8M square Elite-Orient Jade | 440 |
| Cover frame -8M linear Elite-Orient Jade | 440 |
| Cover frame -12M Elite-Orient Jade | 495 |
| Cover frame -18M Elite-Orient Jade | 550 |
| Cover frame -1M Elite-Wood | 196 |
| Cover frame -2M Elite-Wood | 196 |
| Cover frame -3M Elite-Wood | 230 |
| Cover frame -4M Elite-Wood | 288 |
| Cover frame -6M Elite-Wood | 403 |
| Cover frame -8M square Elite-Wood | 460 |
| Cover frame -8M linear Elite-Wood | 495 |
| Cover frame -12M Elite-Wood | 794 |
| Cover frame -18M Elite-Wood | 840 |



Modular Switches

Sleek and Hospitality



Mounting grid with cover frame

| Type | MRP (Rs.) |
|--|-----------|
| Mounting grid cover-1M Square Sleek-White | 90 |
| Mounting grid cover-2M Square Sleek-White | 90 |
| Mounting grid cover-3M Square Sleek-White | 111 |
| Mounting grid cover-4M Square Sleek-White | 133 |
| Mounting grid cover-6M Square Sleek-White | 186 |
| Mounting grid cover-8M Linear Square Sleek-White | 239 |
| Mounting grid cover-8M Square Sleek-White | 239 |
| Mounting grid cover-12M Sleek-White | 302 |
| Mounting grid cover-18M Sleek-White | 350 |



Hospitality range

| Type | MRP (Rs.) |
|---|-----------|
| DND Switch With Indicator - 1M - 1 way 6A | 149 |
| MMR Switch With Indicator - 1M - 1 way 6A | 149 |
| DND & MMR Indicator 240 V AC | 594 |
| Electronic Key Tag -Active-White | 1950 |
| Shaver Socket 115V/240V - Active - White | 2150 |
| Electronic Foot Lamp 2M - 240V AC | 477 |

Modular Switches

Common



Metal boxes

| Type | MRP (Rs.) |
|----------------------|-----------|
| METAL BOX-1M & 2M | 72 |
| METAL BOX- 3M | 89 |
| METAL BOX- 4M | 100 |
| METAL BOX- 6M | 133 |
| METAL BOX- 8M SQUARE | 173 |
| METAL BOX- 8M LINEAR | 179 |
| METAL BOX-12M | 229 |
| METAL BOX -18M | 315 |




Surface boxes

| Type | MRP (Rs.) |
|-------------------------|-----------|
| Surface box - 1M & 2M | 72 |
| Surface box - 3M | 83 |
| Surface box - 4M | 104 |
| Surface box - 6M | 146 |
| Surface box - 8M Linear | 188 |
| Surface box - 12M | 240 |



Functional Inserts

| Type | MRP (Rs.) |
|------------------|-----------|
| FI - USB Charger | 450 |



Electrical accessories

| Type | MRP (Rs.) |
|---|-----------|
| 4 Way Extension Board - Spike Guard | 599 |
| Solution Box - 25A Trip Starter with Socket | 575 |
| 3 Pin Plug Top - 6A | 60 |
| 3 Pin Plug Top - 16A | 99 |

Stand-alone Controls





Stand-alone Controls

Lighting automation controls and sensors




| Type | LP (Rs.) |
|--|----------|
| LRM1071/00 - Occu Switch Movement Detector | 3650 |
| LRH1070/00 - Sensor Surface Mounting Box | 1000 |
| LRM 2510/00 - PIR HighBay Sensor | 5000 |


OccuSwitch

OccuSwitch is a movement detector with a build-in switch. It will switch off the lights in a room or area when it is vacated and thus save energy. It can switch any load up to 6 A and control an office area of around 20 Sqm for small movement (e.g. desk work) and around 50Sqm for large movement (e.g. walking). It is smart daylight sensing technology offers additional saving through daylight override and daylight switching.

Daylight sensing

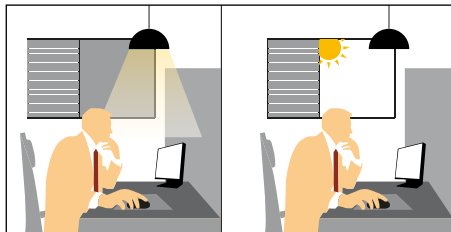

Occupancy sensing

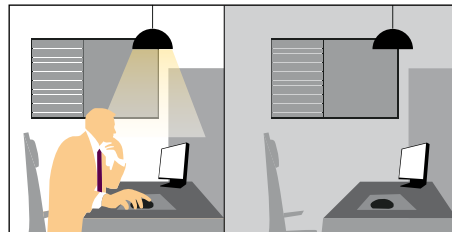

Benefits



Plug and play



Smart savings



High quality

AmpLight

AmpLight solution is a complete web-based solution with advanced communication and easy integration with existing installations. It perfectly combines cost savings and less emissions without compromising on quality and safety.



This solution is available on demand. To get more information, contact your Philips Lighting representative.

South

Philips Electronics India Ltd,

Temple Towers, 5th. Floor,
Old no. 476, new no. 672,
Anna Salai, Nandanam, Chennai 600 035
Tel :- 91 44 6650 1000
Fax :- 91 44 6650 1075
Email : lighting.india@philips.com

Philips Electronics India Ltd,

Philips Innovation Campus
Manyata Tech Park, Nagavara
Bengaluru-560045
Tel : 080-4189 0000
Fax :- 080 6692 9930
Email : lighting.india@philips.com

Philips Electronics India Ltd,

6-3-1109 / I / P / 103, 3rd floor
Jewalpawani Towers, Rajbhavan Road,
Somajiguda, Hyderabad
Tel :- 040 6646 7676 / 4825
Fax :- 040 6678 7974
Email : lighting.india@philips.com

East

Philips Electronics India Ltd,

7, Justice Chandra Madhab Road,
Kolkata 700 020
Tel : 91 33 2486 7621-24
Fax : 91 33 2486 8318
Email : lighting.india@philips.com

North

Philips Electronics India Ltd,

9th Floor, DLF - 9B, DLF Cyber City
DLF Phase 3, Gurgaon 122002
Tel :- 91 124 460 6000
Fax :- 91 124 460 6666
Email : lighting.india@philips.com

West

Philips Electronics India Ltd,

Technopolis Knowledge Park,
Mahakali caves road,
Chakala, Andheri East, Mumbai 400093
Tel :- 91 22 6691 2000
Fax :- 91 22 6691 2389 / 6691 2398
Email : lighting.india@philips.com

Philips Electronics India Ltd,

602, Heritage Tower, 6th floor,
Behind Visnagar Co-op Bank,
Near Gujarat Vidyapith, Usmanpura,
Ahmedabad, Gujarat
Tel :- 91 79 2754 0708
Fax :- 91 79 2754 0666
Email : lighting.india@philips.com

Philips Electronics India Ltd,

8th floor, DLF - 9B, DLF Cyber City
DLF phase 3, Gurgaon 122002
Tel :- 91 124 460 6000
Fax :- 91 124 460 6666

Contact customer service executive at
1800 102 2929 (Toll free)
1860 180 1111, 0124- 4291111
"Standard call rates apply"

For more information contact us at lighting.india@philips.com or call at 1800 102 2929
www.lighting.philips.co.in

Follow us at



www.facebook.com/philipslightingindia



www.twitter.com/PhilipsLightIND



All rights reserved. Reproduction in whole or in part is prohibited.
Owing to continuous Innovation & Improvement, Philips India reserves the right
to make changes in the data/details without prior notice.
Care has been taken to ensure that the information contained within is correct.